

USB radio stick deRFusb 23E00 | 23E06 JTAG

Datasheet

- The compact designed USB radio sticks deRFusb-23E00 | 23E06 JTAG contain a powerful Cortex-M3 microcontroller with 256 Kb High-Speed Flash and a 2.4 GHz ISM band transceiver.
- The transceiver AT86RF231 is intended for ZigBee, IEEE 802.15.4, 6LoWPAN, RF4CE and proprietary ISM applications. It uses a 128-Bit AES encryption.
- With the integrated chip antenna distances of more than 200 m can be reached for line of sight conditions.
- The radio stick is equipped with 3 LEDs for status indication and a 10 pin connector for development purposes (JTAG and Debug).
- The stick comes optionally with a 2 Gb NAND on board that can be used as mass storage for user defined data.




Technical Data


Dimensions	63.5 x 19.0 x 9.5 mm
Operating temperature	-20°C to 70°C
Control and display elements	3x LED (red, yellow, green)
Power supply	USB powered
Power consumption	TX: 65 mA RX: 65 mA Idle: 45 mA
Connections	USB connector type A 10 pin connector
Antenna	Chip ceramic antenna
Antenna gain	+1.3 dBi (peak) -0.5 dBi (average)
Antenna diversity	No
Range	> 200 m (line of sight)
Frequency range	2.4 GHz
Transmitting power	+3 dBm
Receiver sensitivity	-101 dBm
Communication standard	IEEE 802.15.4
Data rate	250 kBit/s, 500 kBit/s, 1 MBit/s, 2 MBit/s
Microcontroller	ATSAM3S4B
Transceiver	AT86RF231
Additional non-volatile memory	None (deRFusb-23E00 JTAG) 2 Gb NAND flash (deRFusb-23E06 JTAG)
Interfaces	USB, JTAG and Debug
Certification	CE, ETSI, FCC, IC pending

Technical Data

Board Overlay

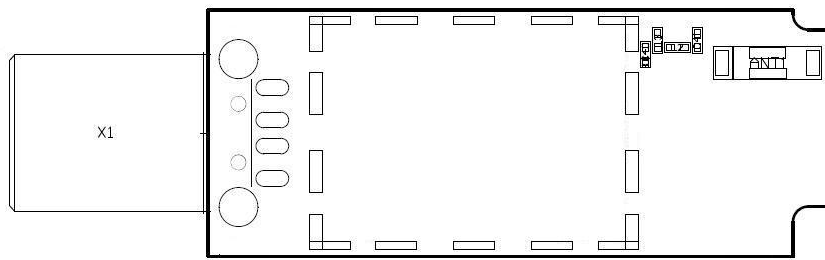

(Top view)

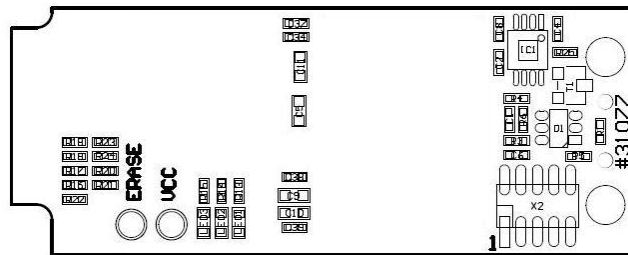

(Bottom view – with 10pin connector)

Overlay

Scope of delivery

USB stick deRFusb-23E00 JTAG (with 10pin connector)
 USB stick deRFusb-23E06 JTAG (with 10pin and NAND)

Order No.

BN-033202
 BN-033203

Accessories (optional)

SAM-ICE adapter

BN-028337

Development kits

An analyzer version of deRFusb-23E00 JTAG is included in the following kits:

deRFdevelopmentKit ZigBee 2.4 GHz
 deRFdevelopmentKit 6LoWPAN 2.4 GHz

BN-032515
 BN-032518

Board versions

USB stick deRFusb-13E00 JTAG (with 10pin connector)
 USB stick deRFusb-13E06 JTAG (with 10pin and NAND)
 USB stick deRFusb-13E00 (with case)
 USB stick deRFusb-13E06 (with case and NAND)
 USB stick deRFusb-23E00 (with case)
 USB stick deRFusb-23E06 (with case and NAND)
 Analyzer stick BitCatcher sub-GHz
 Analyzer stick BitCatcher 2.4 GHz
 Analyzer stick Perytons 2.4 GHz

BN-033206
 BN-033207
 BN-031807
 BN-031539
 BN-031805
 BN-031075
 BN-600035
 BN-600034
 BN-028636

Order Information

Variants

More information about the variants is described in detail in the user manual.

Order online: <https://shop.dresden-elektronik.de>