
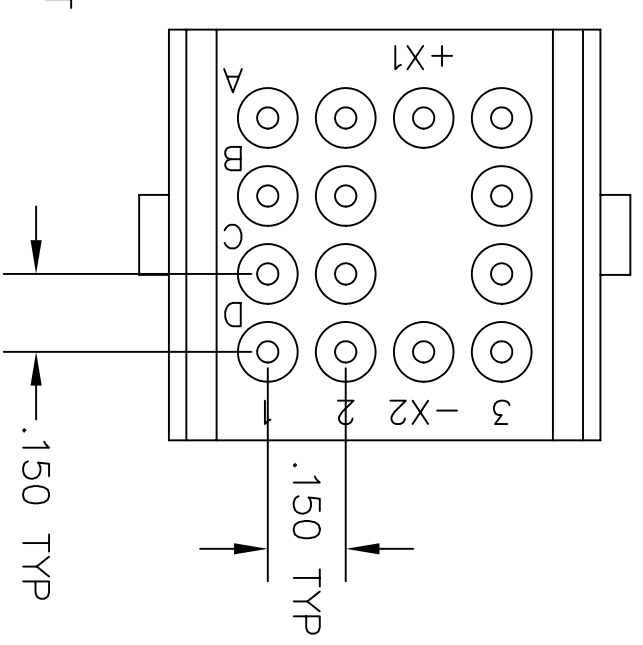
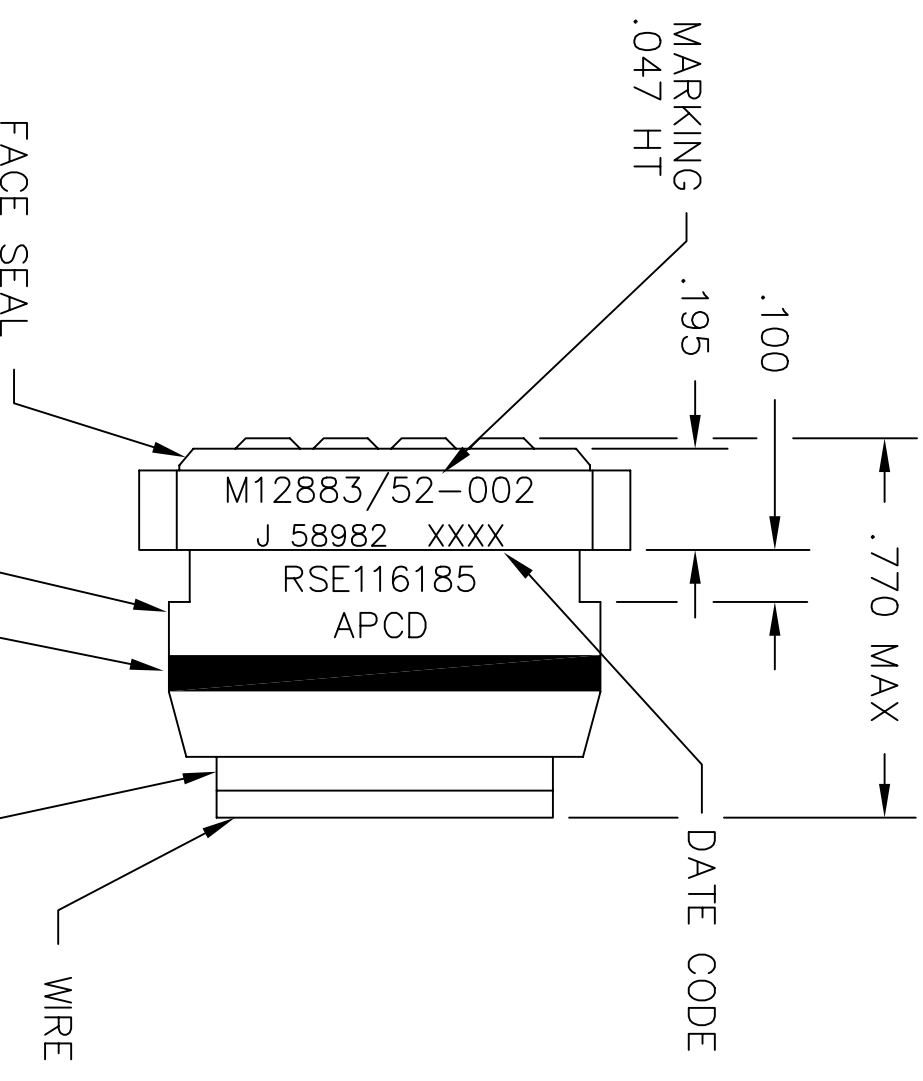


REV	ECN	APP'D
-	4158	JT 10/26/00
A	5709	

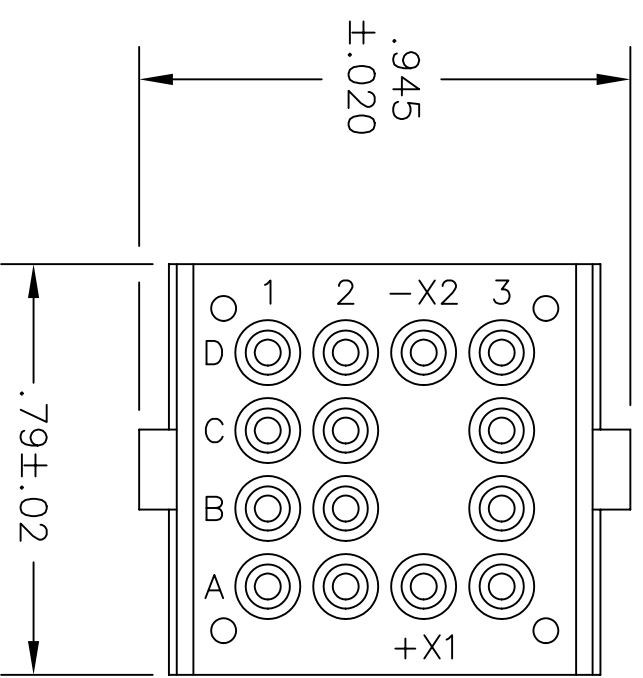

NOTES:

1. MATERIALS:  
BODY AND WIRE SUPPORT: POLYETHERIMIDE PER MIL-P-46184  
GROMMET AND SEAL: SILICONE RUBBER PER ZZ-R-765  
CONTACT RETAINERS: BERYLLIUM COPPER  
SOCKET CONTACTS: COPPER ALLOY, HARD GOLD PLATED PER MIL-G-45204
2. PERFORMANCE SPECIFICATIONS:  
OPERATING TEMPERATURE: -65° TO 125° C  
INSULATION RESISTANCE: 1000 MEGOHMS MIN  
DWV: 1500 VRMS AT SEA LEVEL AND 700 VRMS AT 80,000 FT  
VIBRATION AND SHOCK PER MIL-STD-202
3. SOCKET MATES WITH M83536/6-025 RELAYS
4. SOCKET FOR USE WITH PCD TRACK NO. RST145005 (M12883/53-001)

DIMENSIONS	TOLERANCES	PROJECTION
ANSI Y14.5M	.XX ±.01	
UNITS: INCHES	.XXX ±.005	
ACAD FILE	ANGLES ±2°	

**Amphenol Pcd**  
SPECIFICATION DRAWING

ENGR  
MEL 10/25/00

CHKD  
APPD  
J. TON 10/26/00

TITLE		
SIZE	DWG NO.	REV
A	RSE116185	A
TRACK MOUNT RELAY SOCKET M12883/52-002		

ORIGINAL

THIS DOCUMENT CONTAINS  
PROPRIETARY INFORMATION WHICH  
IS THE CONFIDENTIAL PROPERTY  
OF AMPHENOL PCD INC. PEABODY, MA

APPD  
J. TON 10/26/00

CODE:	SHEET	OF
58982	NONE	1 OF 1