

Housing - HC-STA-D07-BWS-PL-BK - 1419265

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel mounting base D7, with single locking latch, material: PA, height: 25.5 mm, cable gland: none, support sleeve: no, Standard



Key Commercial Data

| | |
|--------------|---------------|
| Packing unit | 1 STK |
| GTIN | |
| GTIN | 4055626160160 |

Technical data

Dimensions

| | |
|-------------------------------|---------|
| Height | 25.5 mm |
| Width | 34.2 mm |
| Length | 24.2 mm |
| Length of the assembly cutout | 21 mm |
| Width of the assembly cutout | 21 mm |

Ambient conditions

| | |
|--------------------------------------|-------------------|
| Degree of protection of housing (IP) | IP66 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|------------------|---|
| Note | for contact inserts HC-A03, A04, D07, D08, Q02, Q03, Q04, Q05, Q07, Q12 |
| Size | D7 |
| Housing type | Panel mounting base |
| Color | black |
| Locking type | with single locking latch |
| Screw connection | none |
| Housing material | PA |

Housing - HC-STA-D07-BWS-PL-BK - 1419265

Technical data

General


| | |
|--|------------------------|
| Seal material | NBR |
| Material lock | PA |
| Flammability rating according to UL 94 | V0 (Polyamide housing) |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |



Drawings

Dimensional drawing



Dimensional drawing

Dimensional drawing

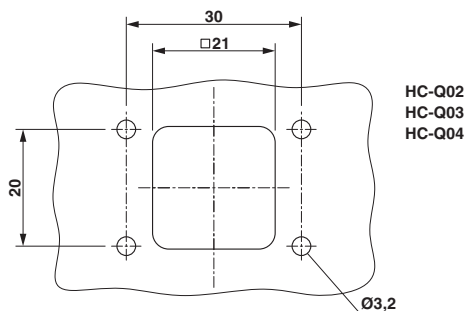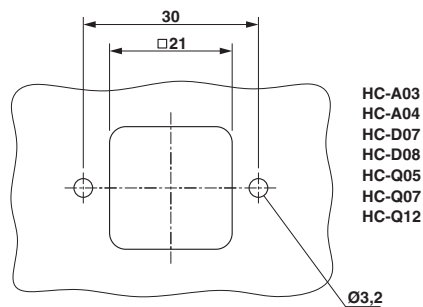

Mounting cutout

Approvals

Approvals

Approvals

EAC / GL

Ex Approvals

Housing - HC-STA-D07-BWS-PL-BK - 1419265

Approvals

Approval details

| | | | |
|-----|---|--|--------------------------|
| EAC |  | | RU C- DE.AI30.B.01102 |
|-----|---|--|--------------------------|

| | | | |
|----|---|---|------------|
| GL |  | http://exchange.dnv.com/tari/ | 6196614 HH |
|----|---|---|------------|

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>