
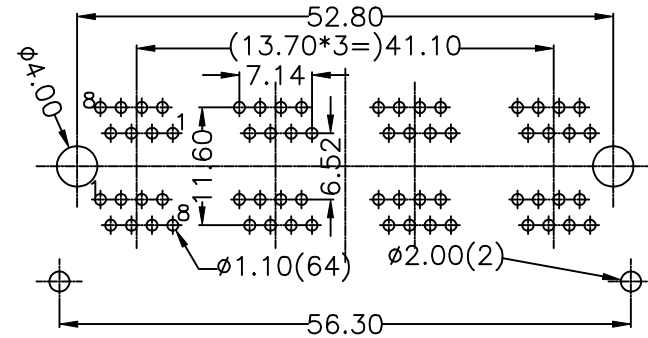
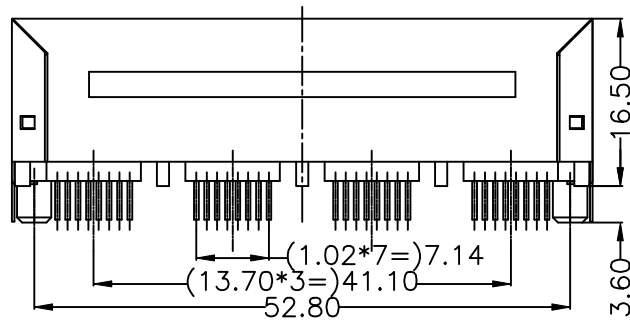
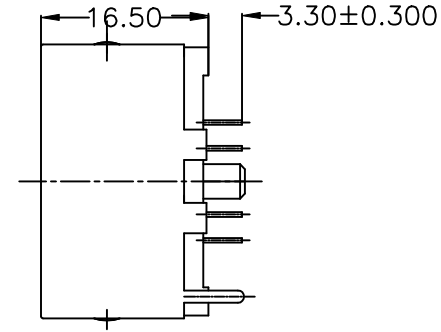


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		NOTES MODIFY	Among 10/22/04	

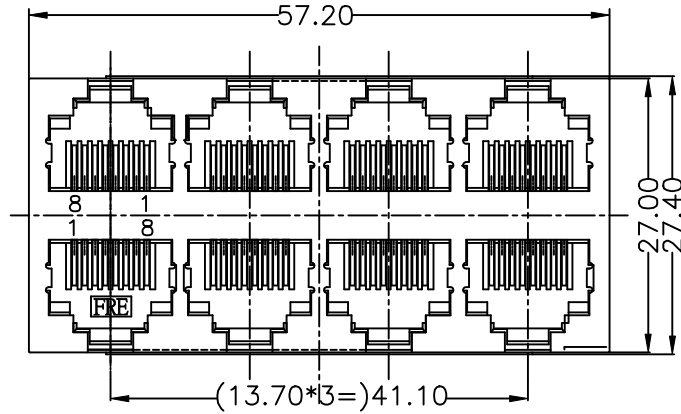

**NOTES:**

**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

1. HOUSING MATERIAL : PBT+30%
2. CONTACT MATERIAL : PHOSPHOR BRONZE  $\phi$ .46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

1. STORAGE : -40°C TO +85°C.
  2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: E5288-YXCBOX

1- 3U"	2- 6U"
3- 15U"	4- 30U"
5- 50U"	
N- W/O LOGO	
C- W/ FRE LOGO	

<p>← MM (INCH) →</p> <p>TOLERANCES EXCEPT AS NOTED</p>		<p>DFTO CZH DATE 1/31/02'</p> <p>CHKD DATE 10/11/07</p> <p>MFO DATE</p> <p>APPL USE DATE 10/11/07</p>	<p>FULL RISE ELECTRONIC CO., LTD</p>	
<p>MM</p> <p>.0 ±0.20 ±</p> <p>.00 ±0.15 ±</p> <p>.000 ±0.075 ±</p>	<p>ANGLES ±</p> <p>THIRD ANGLE PROJECTION</p>	<p>MATERIAL :</p> <p>QTY :</p> <p>FINISH :</p> <p>SCALE : 2:1</p>	<p>TITLE</p> <p><b>2X4 TOP ENTRY PCB JACK</b></p>	
<p>DRAWING NO. GE523013</p> <p>/PART NO. SEE NOTE</p>			<p>SIZE A3</p> <p>REV 1</p>	<p>DO NOT SCALE DRAWING</p> <p>SHEET X OF Y</p>