



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			2	CAD-NEUERSTELLUNG	14.05.90	A.HO	-
			3	REVISED PER ECO-10-002850	09FEB10	KK	-
			4	ECR-10-025774	18JAN11	KK	HMR

POLZ.	L±0.5	BESTELL-NR.	
1	3.3	826-539	1
2	7.3		2
3	11.3		3
4	15.2		4
5	19.2		5
6	23.1		6
7	27.1		7
8	31.1		8
9	35.1		9
10	39.0	1-	0
11	43.0	1-	1
12	46.9	1-	2
13	50.9	1-	3
14	54.8	1-	4
15	58.8	1-	5
16	62.8	1-	6
17	66.7	1-	7
18	70.7	1-	8
19	74.7	1-	9
20	78.6	2-	0
21	82.6	2-	1
22	86.5	2-	2
23	90.5	2-	3
24	94.4	2-	4
25	98.4	2-	5
26	102.4	2-	6
27	106.3	2-	7
28	110.3	2-	8
29	114.2	2-	9
30	118.2	2,3	0
31	122.2	3-	1
32	126.1	3-	2
33	130.1	3-	3
34	134.0	3-	4
35	138.0	3-	5
36	141.6	3- 826-539	6

ZEICHNUNG GÜLTIG AB 20/90

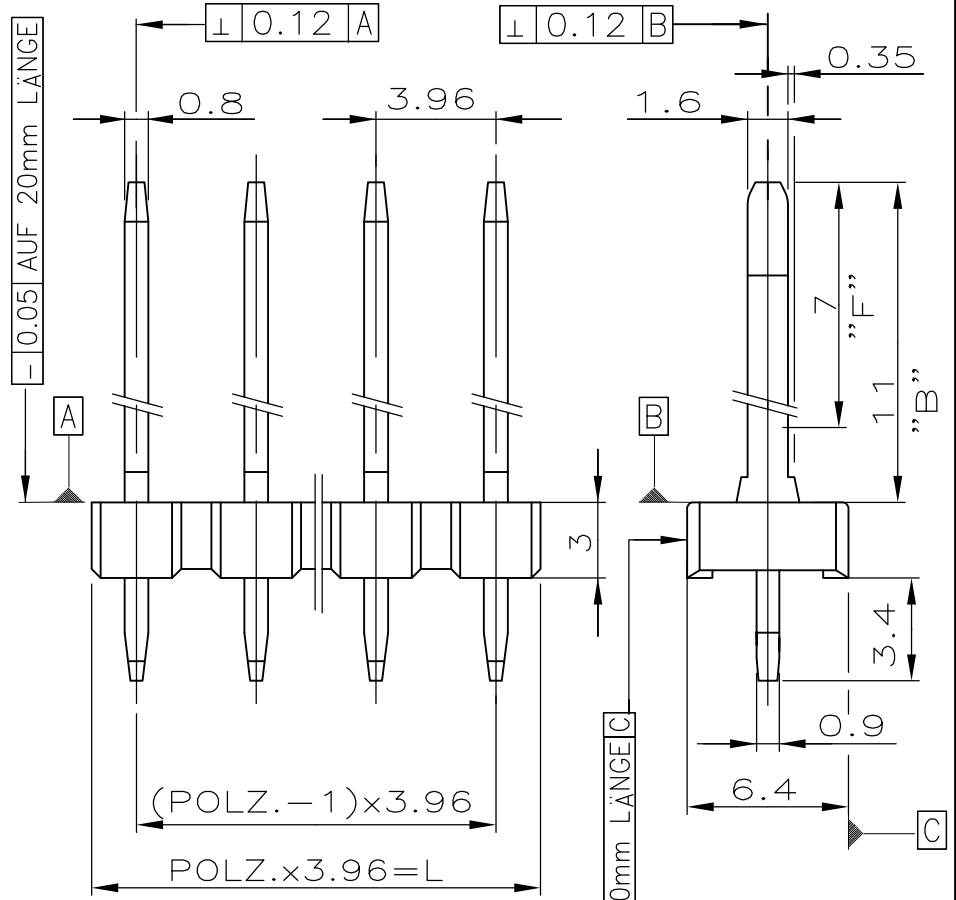

BOHRBILD

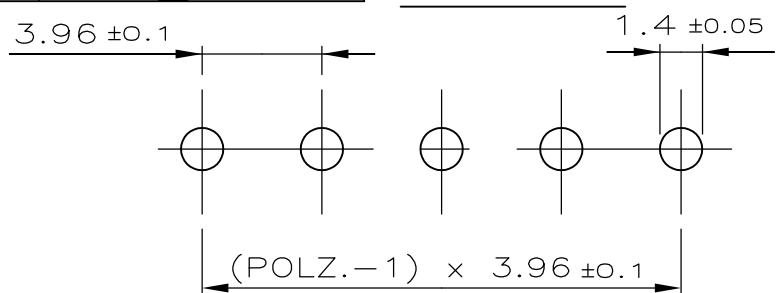

- 1 STECKSEITE: IM BEREICH "F" 0,8µm GOLD ÜBER 1,27 µm NICKEL IM BEREICH "B"
- 2 LÖTSEITE: MIN. 2,5 µm ZINN ÜBER 1,27 µm NICKEL
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 3 OBSOLETE

KONTAKTSTIFT	Cu Sn	1
STIFTGEHÄUSE	PBT-GV	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED. RELEASED FOR PUBLICATION BY - COPYRIGHT -

DIMENSIONS: mm	DWN	23.11.84	MATERIAL	-	FINISH	-
	CHK	24.01.85	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3mm	APVD	-				
	PRODUCT SPEC	-	AMPMODU I STIFTL. RASTER 3.96 EINREIHIG			
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	WEIGHT	-	A4	00779	C-826539	-
CUSTOMER DRAWING			SCALE	4:1	SHEET	1 OF 1
					REV	4