


66010

LOOSE PIECE TERMINALS MUST MEET ALL APPLICABLE STRIP SPECIFICATIONS IN ADDITION TO THE FOLLOWING:

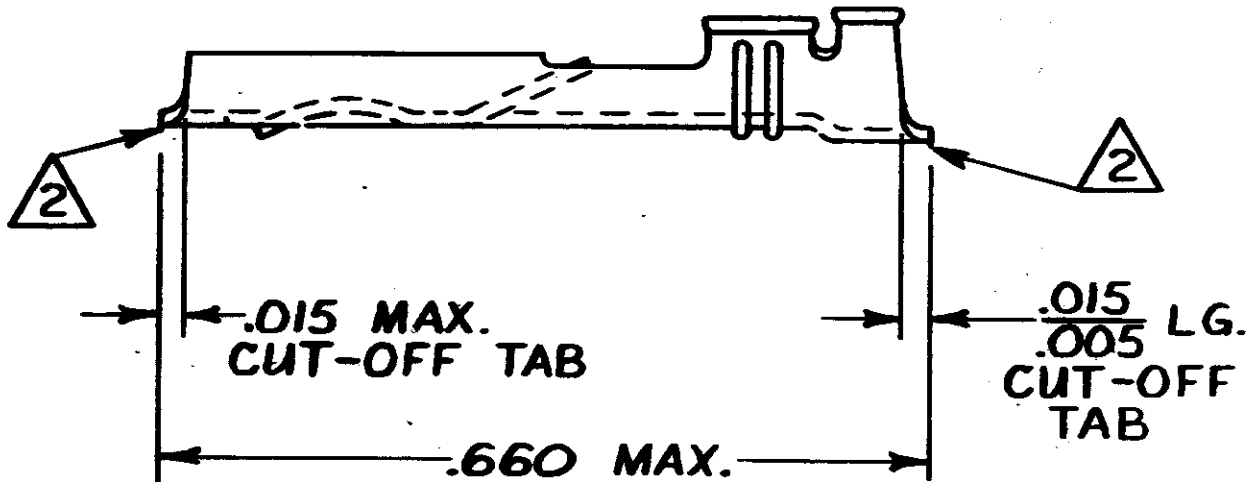

1. CONTACT LUBRICANT CONFORMS 118-53-1 (P/N 27011-1)
2. .003 MAX. DOWN BURR.
3. FINISHED PARTS MUST BE IDENTIFIED BY A COMBINATION NUMBER.
4. MATERIAL: PHOSPHOR BRONZE #5 HARD; .0125 ±.0005 x .360 ±.002
5. UNPLATED
6. .000030 MIN. GOLD PER 112-162-5 OVER .000030 MIN. NICKEL PER 112-25-2.
7. .000050 MIN. GOLD PER 112-162-5 OVER .000030 MIN. NICKEL PER 112-25-2.

COMBINATION NO. Δ	
PART NO.	STRIP EQUIV.
66010-2	66005-2 L.P.
66010-3	66005-3 L.P.

Δ	66010-1	Δ	100-221	66010-3
Δ	66010-1	Δ	↑	↑ -2
Δ	72049	Δ	100-221	66010-1
FINISH	MATL. PART NO	MATL. SPEC	PART NUMBER	

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

LOC AR		REVISED 8425 Δ EAM 4-83		DIE FEED		APPL FEED		DIE 1-1186		TRIMMING BURR .003 MAX		DIMENSIONS ARE IN INCHES AND APPLY BEFORE PLATING TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRE RANGE 24-20		AMP INCORPORATED Harrisburg, Pa.	
DIST 27		REDRAWN 8303 Δ EAM 11-9-82						WDW .180		IDW .250		2 PL DEC \pm 3 PL DEC \pm .005 ANGLES \pm 0° 30'		INSULATION RANGE .050 - .080		NAME AMP BLADE: RCPT., END FEED	
P F LTR		REVISION RECORD		APP		DATE		REELING 107-		SPLICE 115-		DR 11-9-82 APP 1-10-83		SURFACE AREA .295 SQ IN		SCALE 6:1	
												CHK 11-10-82 REL 1-13-83				NUMBER 66010	
												Dr. Buskey E.T. Parsons				REV R ₁	