

FEATURES

- Integrated stereo power stage
- $R_{DS-ON} < 0.3 \Omega$ (per transistor)
- Efficiency > 90%
- Short-circuit protection
- Overtemperature protection

APPLICATIONS

- Flat panel televisions
- PC audio systems
- Mini components

GENERAL DESCRIPTION

The ADAU1513 is a 2-channel bridge-tied load (BTL) Class-D audio power stage. The power stage can drive the speaker loads of 4Ω at up to 15 W per channel at high efficiency. The 4-channel audio system can be formed when used with an ADAV4201 pulse-width modulator (PWM) processor using two ADAU1513s. The power stage accepts a 3.3 V logic differential PWM as input from an ADAV4201 processor. The power stage comprises thermal and output short-circuit protection with logic-level error flag outputs for interfacing to a system microcontroller along with reset and mute control of the power stage. The power stage operates from a range of power supply voltages from 9 V up to 18 V. The low power digital logic operates from a 3.3 V supply. The power stage can be used with modulators other than the ADAV4201. Contact your local sales department for application assistance.

FUNCTIONAL BLOCK DIAGRAM

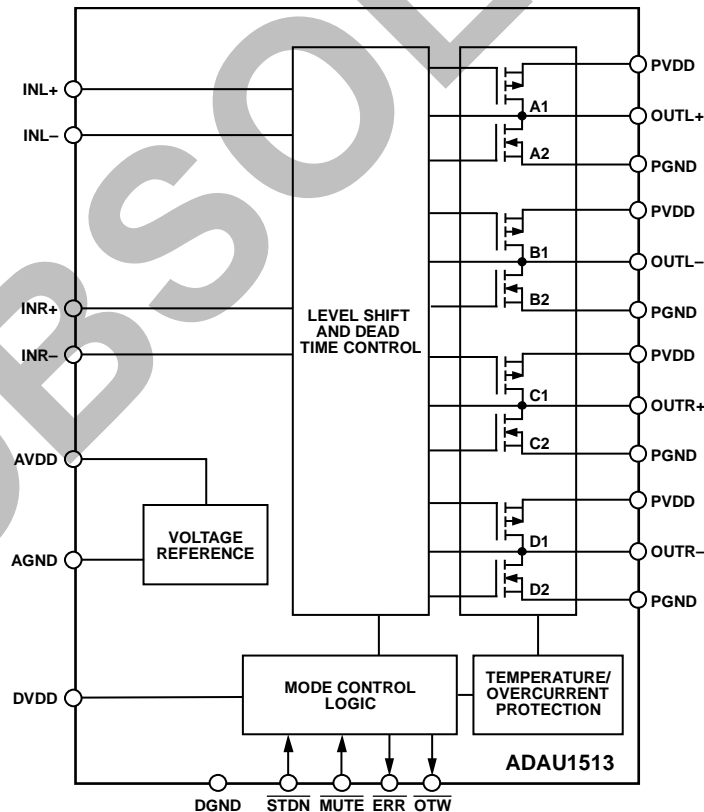


Figure 1.

Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

| | | | |
|--|---|---|----|
| Features | 1 | Theory of Operation | 12 |
| Applications..... | 1 | Overview | 12 |
| General Description | 1 | Power Stage | 12 |
| Functional Block Diagram | 1 | Protection Circuits | 12 |
| Revision History | 2 | Thermal Protection..... | 12 |
| Specifications..... | 3 | Overcurrent Protection | 12 |
| Performance Summary..... | 3 | Undervoltage Protection | 12 |
| Power Supplies | 3 | Automatic Recovery from Protections | 12 |
| Digital I/O | 4 | MUTE and STDN | 13 |
| PWM Input Logic Table | 4 | Power-Up/Power-Down Sequence | 13 |
| Digital Timing..... | 4 | Applications Information | 15 |
| Absolute Maximum Ratings..... | 5 | Outline Dimensions | 16 |
| ESD Caution..... | 5 | Ordering Guide | 16 |
| Pin Configuration and Function Description | 6 | | |
| Typical Performance Characteristics | 8 | | |

REVISION HISTORY

5/07—Revision 0: Initial Version

OBSOLETE

SPECIFICATIONS

DVDD = 3.3 V, AVDD = 3.3 V, PVDD = 15 V, ambient temperature = 25°C, load impedance = 8 Ω, measurement bandwidth = 20 Hz to 20 kHz, unless otherwise noted. Audio performance test data measured with ADAV4201.

PERFORMANCE SUMMARY

Table 1.

| Parameter | Min | Typ | Max | Unit | Test Conditions/Comments |
|--|-----|------|-----|------|---|
| OUTPUT POWER ¹ | | 11 | | W | 1 kHz 1% THD + N, 8 Ω |
| | | 14 | | W | 10% THD + N, 8 Ω |
| | | 14.5 | | W | 1% THD + N, 6 Ω |
| | | 17.5 | | W | 10% THD + N, 6 Ω |
| | | 19 | | W | 1% THD + N, 4 Ω |
| | | 23 | | W | 10% THD + N, 4 Ω |
| EFFICIENCY | | 90 | | % | P _{OUT} = 15 W |
| R _{DS-ON} | | | | | |
| Per High-Side Transistor | | 280 | | mΩ | I _D = 100 mA |
| Per Low-Side Transistor | | 250 | | mΩ | I _D = 100 mA |
| THERMAL CHARACTERISTICS | | | | | |
| Thermal Warning Active ² | | 135 | | °C | Die temperature |
| Thermal Shutdown Active | | 150 | | °C | Die temperature |
| OVERCURRENT SHUTDOWN ACTIVE | | 5 | | A | peak |
| TOTAL HARMONIC DISTORTION PLUS NOISE (THD + N) | | 0.1 | | % | P _{OUT} = 1 W, 1 kHz |
| SIGNAL-TO-NOISE RATIO (SNR) | | 96 | | dB | A-weighted, referred to 1% THD + N output |
| DYNAMIC RANGE | | 96 | | dB | A-weighted, measured with -60 dBFS input |
| CROSSTALK BETWEEN LEFT AND RIGHT CHANNELS | | 65 | | dB | @ 0 dBFS input 20 Hz to 20 kHz |
| UNDERVOLTAGE TRIP THRESHOLD | | 5 | | V | |
| MINIMUM OUTPUT PULSE WIDTH | | 50 | | ns | |

¹ Output powers above 15 W at 4 Ω and above 18 W at 6 Ω may need extra heat-sinking for continuous operation.

² Thermal warning flag is for indication of device T_J reaching close to shutdown temperature.

POWER SUPPLIES

Table 2.

| Parameter | Min | Typ | Max | Unit | Test Conditions/Comments |
|--|-----|-----|-----|------|--------------------------|
| DIGITAL SUPPLY VOLTAGE (DVDD) | 3.0 | 3.3 | 3.6 | V | |
| ANALOG SUPPLY VOLTAGE (AVDD) | 3.0 | 3.3 | 3.6 | V | |
| POWER TRANSISTOR SUPPLY VOLTAGE (PVDD) | 9 | 15 | 18 | V | |
| POWER-DOWN CURRENT | | | | | STDN held low |
| AVDD | | 2 | 3 | μA | |
| DVDD | | 50 | 55 | μA | |
| PVDD | | 55 | 600 | μA | |
| MUTE CURRENT | | | | | MUTE held low |
| AVDD | | 0.5 | 0.6 | mA | |
| DVDD | | 0.9 | 1.2 | mA | |
| PVDD | | 0.3 | 0.9 | mA | |
| OPERATING CURRENT | | | | | STDN and MUTE held high |
| AVDD | | 0.5 | 0.6 | mA | |
| DVDD | | 1.1 | 2.5 | mA | |
| PVDD | | 34 | 40 | mA | |

ADAU1513

DIGITAL I/O

Table 3.

| Parameter | Min | Typ | Max | Unit | Test Conditions/Comments |
|-----------------------------------|-----|-----|-----|------|--------------------------|
| INPUT VOLTAGE | | | | | |
| Input Voltage High | 2.0 | | | V | |
| Input Voltage Low | | | 0.8 | V | |
| OUTPUT VOLTAGE | | | | | |
| Output Voltage High | 2.4 | | | V | @ 2 mA |
| Output Voltage Low | | | 0.4 | V | @ 2 mA |
| LEAKAGE CURRENT ON DIGITAL INPUTS | | | 10 | μA | |

PWM INPUT LOGIC TABLE

Table 4.

| MUTE | INL+/INR+ | INL-/INR- | OUTL+/OUTR+ | OUTL-/OUTR- | Mode |
|------|-----------|-----------|-------------|-------------|-----------------|
| Low | Low/High | Low/High | Off | Off | High-Z |
| High | Low | Low | GND | GND | Output damped |
| High | High | Low | PVDD | GND | Positive output |
| High | Low | High | GND | PVDD | Negative output |
| High | High | High | PVDD | PVDD | Not used |

DIGITAL TIMING

Table 5.

| Parameter | Min | Typ | Unit | Description |
|------------------------|-----|-----|------|---|
| t_{SET} | 10 | | μs | Wait Time for Unmute |
| t_{HOLD} | 10 | | μs | Wait Time for Shutdown |
| t_{WAIT} | 100 | | ns | Wait Time for Applying Input |
| t_{PDL-H} | | 13 | ns | Propagation Delay (Low to High) |
| t_{PDH-L} | | 13 | ns | Propagation Delay (High to Low) |
| $t_{OUTx+/OUTx- MUTE}$ | | 600 | ns | Time Delay After MUTE Held Low Until Output Stops Switching |

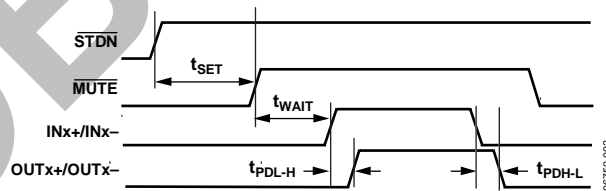


Figure 2. Timing Diagram Unmute

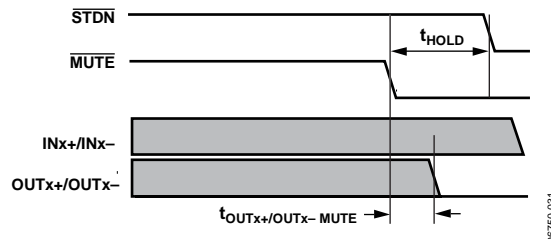


Figure 3. Timing Diagram Mute

ABSOLUTE MAXIMUM RATINGS

Table 6.

| Parameter | Rating |
|--|------------------------------|
| DVDD to DGND | -0.3 V to +3.6 V |
| AVDD to AGND | -0.3 V to +3.6 V |
| PVDD to PGND ¹ | -0.3 V to +20.0 V |
| PWM Inputs | DGND - 0.3 V to DVDD + 0.3 V |
| MUTE/STDN Inputs | DGND - 0.3 V to DVDD + 0.3 V |
| Operating Temperature Range | -40°C to +85°C |
| Storage Temperature Range | -65°C to +150°C |
| Maximum Junction Temperature | 150°C |
| θ_{JA} Thermal Resistance | 26.7°C/W |
| Ψ_{JB} Thermal Characterization (Junction-Board) | 13.3°C/W |
| Ψ_{JT} Thermal Characterization (Junction-Package Top) | 0.2°C/W |
| Lead Temperature | |
| Soldering (10 sec) | 260°C |
| Vapor Phase (60 sec) | 215°C |
| Infrared (15 sec) | 220°C |

¹ Includes any induced voltage due to inductive load.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

OBSOLETE

PIN CONFIGURATION AND FUNCTION DESCRIPTION

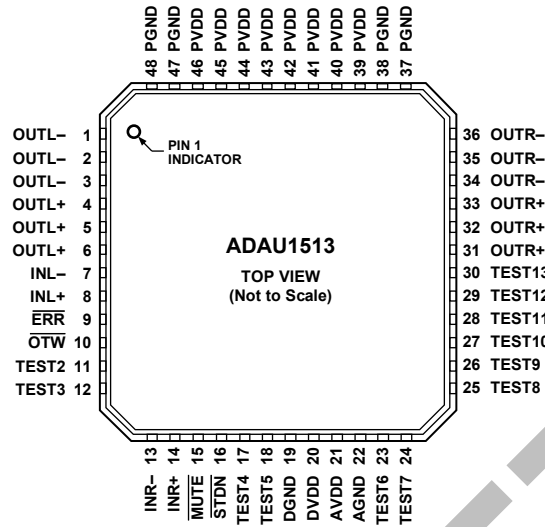

- NOTES**
1. EPAD NOT SHOWN AND INTERNALLY CONNECTED TO PGND, DGND, AND AGND FOR TQFP-48.
 2. EPAD NOT SHOWN AND INTERNALLY CONNECTED TO PGND AND DGND FOR LFCSP-48.

Figure 4. Pin Configuration

Table 7. Pin Function Descriptions

| Pin Number | Mnemonic | Type ¹ | Description |
|------------|----------|-------------------|--|
| 1, 2, 3 | OUTL- | O | Output of High Power Transistors, Left Channel Negative Polarity. |
| 4, 5, 6 | OUTL+ | O | Output of High Power Transistors, Left Channel Positive Polarity. |
| 7 | INL- | I | Differential PWM Left Input (-). |
| 8 | INL+ | I | Differential PWM Left Input (+). |
| 9 | ERR | O | Overtemperature Shutdown Error Indicator (Active Low Open-Drain Output). |
| 10 | OTW | O | Overtemperature Warning Indicator (Active Low Open-Drain Output). |
| 11 | TEST2 | I | Reserved for Internal Use. Connect to DGND. |
| 12 | TEST3 | I | Reserved for Internal Use. Connect to DVDD. |
| 13 | INR- | I | Differential PWM Right Input (-). |
| 14 | INR+ | I | Differential PWM Right Input (+). |
| 15 | MUTE | I | Mute (Active Low Input). |
| 16 | STDN | I | Shutdown/Reset Input (Active Low Input). |
| 17 | TEST4 | I | Reserved for Internal Use. Connect to DGND. |
| 18 | TEST5 | O | Reserved for Internal Use. Do not connect. |
| 19 | DGND | P | Digital Ground for Digital Circuitry. Internally connected to exposed pad (ePAD) ² . |
| 20 | DVDD | P | Positive Supply for Digital Circuitry. |
| 21 | AVDD | P | Positive Supply for Analog Circuitry (Can be Tied to DVDD). |
| 22 | AGND | P | Analog Ground for Analog Circuitry. Internally connected to ePAD ² . Can be tied to DGND. |
| 23 | TEST6 | I | Reserved for Internal Use. Connect to DGND. |
| 24 | TEST7 | I | Reserved for Internal Use. Connect to DGND. |
| 25 | TEST8 | I | Reserved for Internal Use. Connect to DGND. |
| 26 | TEST9 | I | Reserved for Internal Use. Connect to DGND. |
| 27 | TEST10 | I | Reserved for Internal Use. Connect to DGND. |
| 28 | TEST11 | I | Reserved for Internal Use. Connect to DGND. |
| 29 | TEST12 | I | Reserved for Internal Use. Connect to DGND. |
| 30 | TEST13 | I | Reserved for Internal Use. Connect to DGND. |
| 31, 32, 33 | OUTR+ | O | Output of High Power Transistors, Right Channel Positive Polarity. |

| Pin Number | Mnemonic | Type ¹ | Description |
|--------------------------------|----------|-------------------|--|
| 34, 35, 36 | OUTR- | O | Output of High Power Transistors, Right Channel Negative Polarity. |
| 37, 38, 47, 48 | PGND | P | Power Ground for High Power Transistors. Internally connected to ePAD ² . |
| 39, 40, 41, 42, 43, 44, 45, 46 | PVDD | P | Positive Power Supply for High Power Transistors. |

¹ I = input, O = output, P = power.

² ePAD is connected internally to PGND, DGND, and AGND.

OBSOLETE

TYPICAL PERFORMANCE CHARACTERISTICS

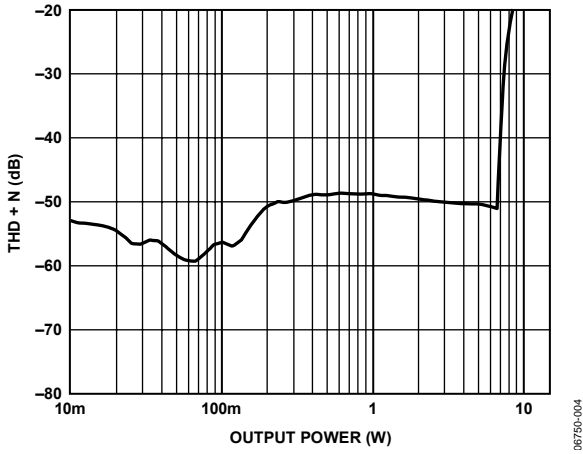


Figure 5. THD + N vs. Output Power, 9 V, 4 Ω

06750-004

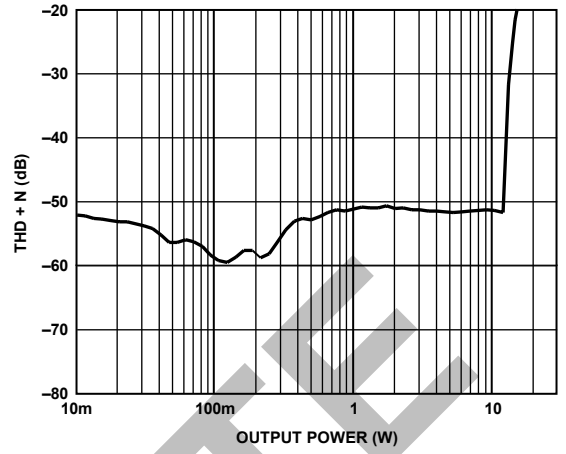


Figure 8. THD + N vs. Output Power, 12 V, 4 Ω

06750-007

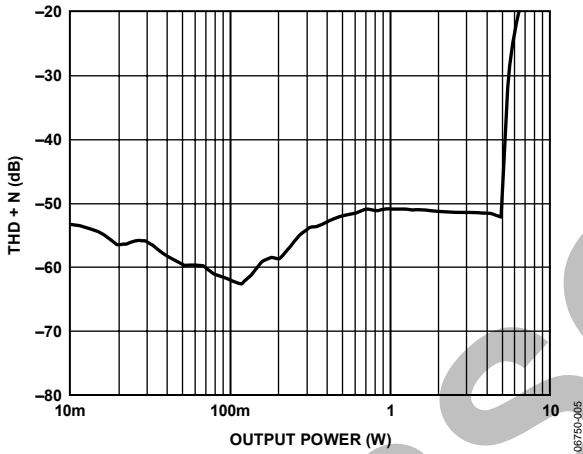


Figure 6. THD + N vs. Output Power, 9 V, 6 Ω

06750-005

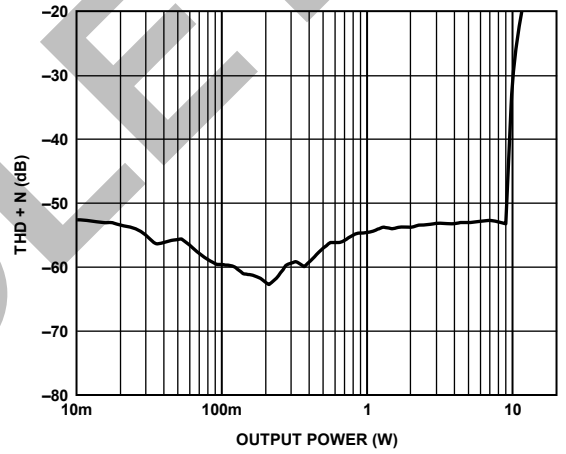


Figure 9. THD + N vs. Output Power, 12 V, 6 Ω

06750-008

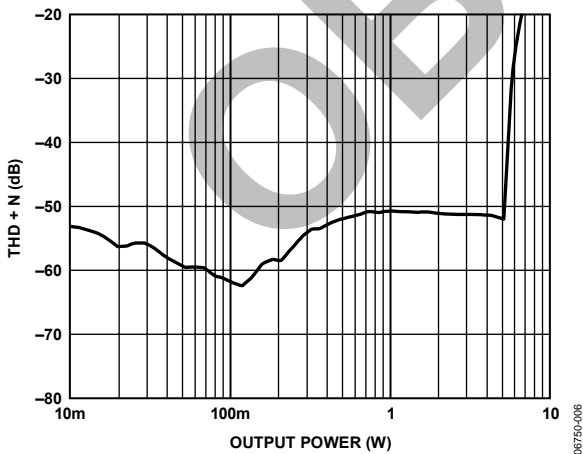


Figure 7. THD + N vs. Output Power, 9 V, 8 Ω

06750-006

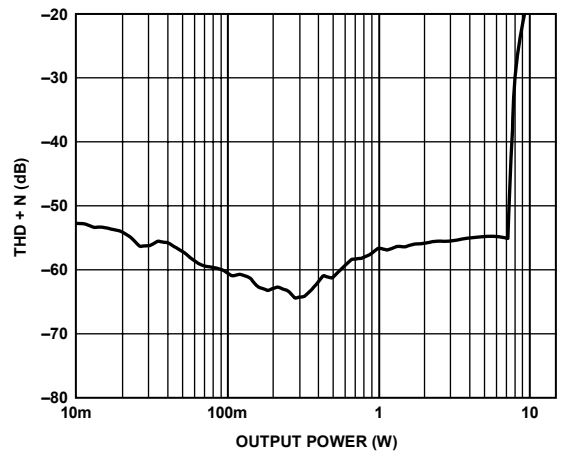


Figure 10. THD + N vs. Output Power, 12 V, 8 Ω

06750-009

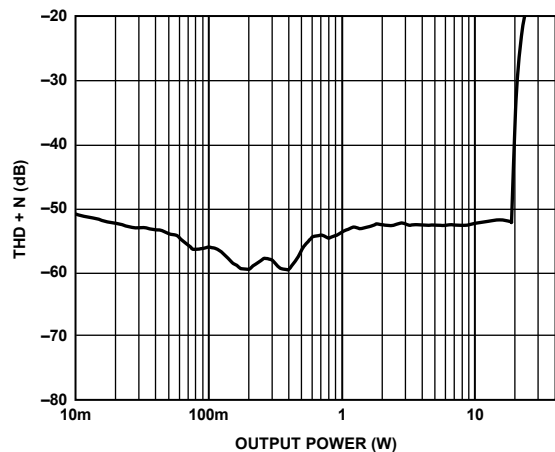


Figure 11. THD + N vs. Output Power, 15 V, 4 Ω

06750-010

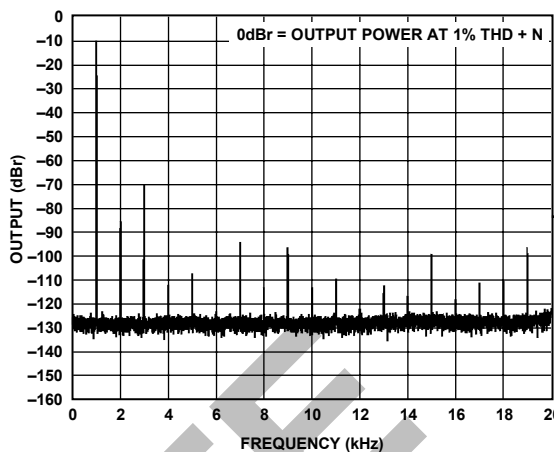


Figure 14. FFT, 1 W, 15 V, 8 Ω

06750-013

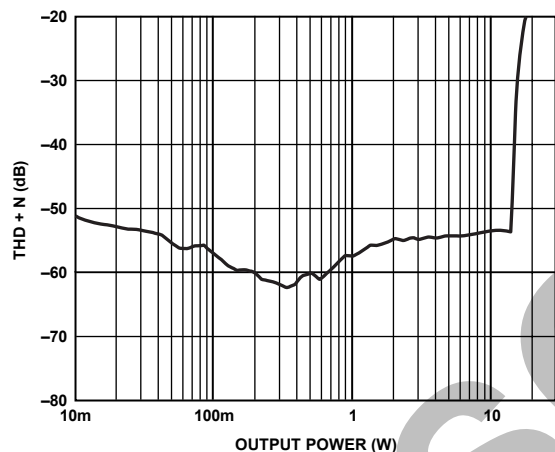


Figure 12. THD + N vs. Output Power, 15 V, 6 Ω

06750-011

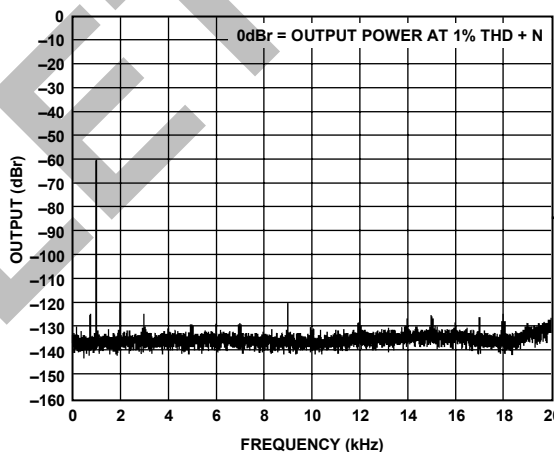


Figure 15. FFT, 60 dBFS, 15 V, 8 Ω

06750-014

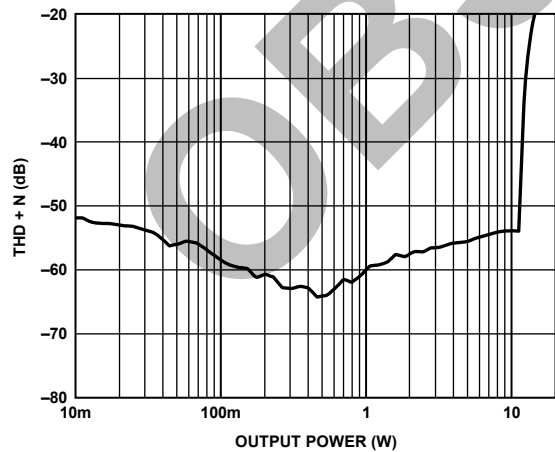


Figure 13. THD + N vs. Output Power, 15 V, 8 Ω

06750-012

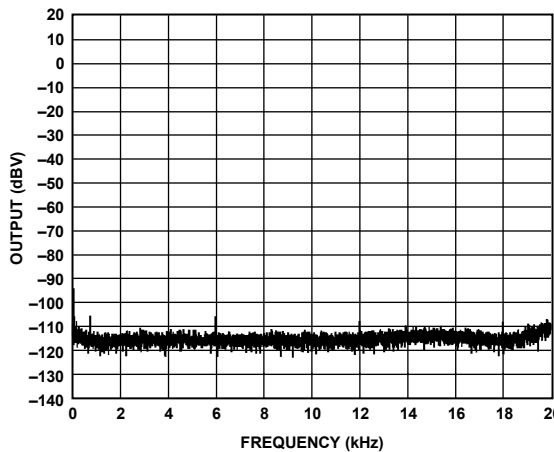


Figure 16. FFT Dither, 15 V, 8 Ω

06750-015

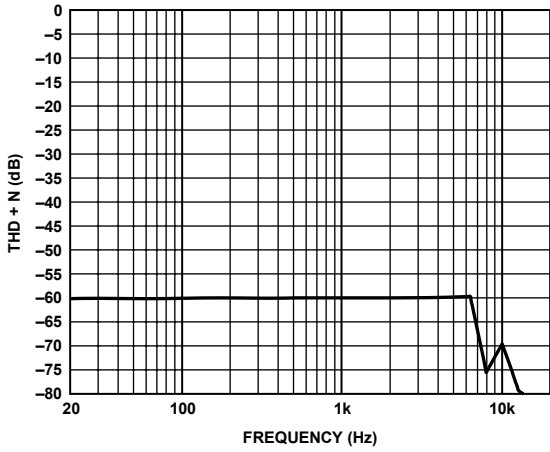


Figure 17. THD + N vs. Frequency, 1 W, 15 V, 8 Ω

06750-016

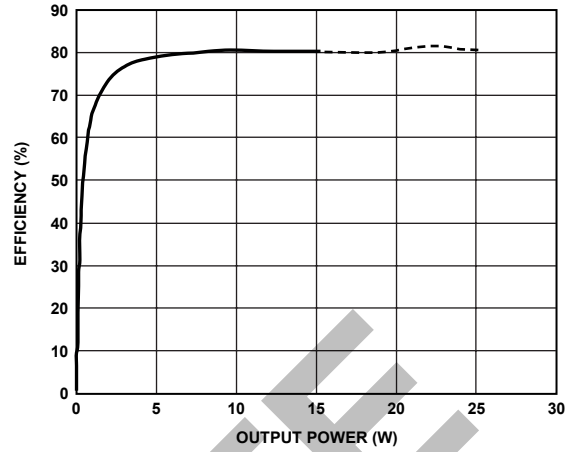


Figure 20. Efficiency vs. Output Power, 15 V, 4 Ω

06750-019

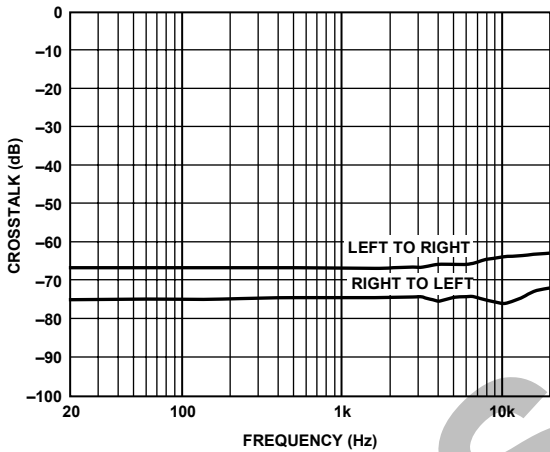


Figure 18. Crosstalk, 0 dBFS, 15 V, 8 Ω

06750-017

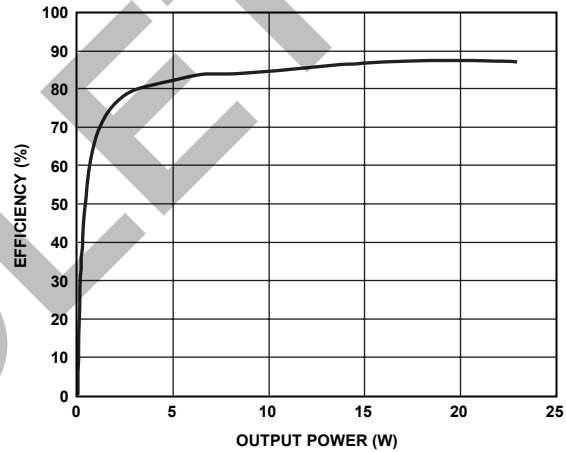


Figure 21. Efficiency vs. Output Power, 15 V, 6 Ω

06750-020

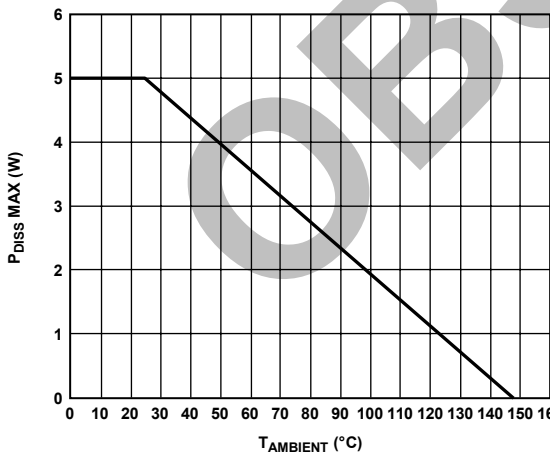


Figure 19. Power Dissipation vs. Ambient Temperature

06750-018

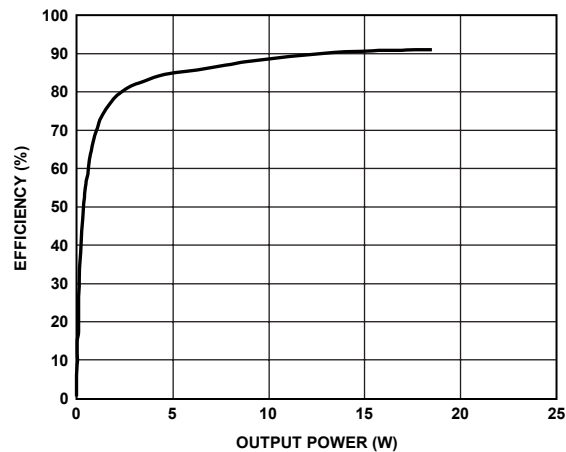


Figure 22. Efficiency vs. Output Power, 15 V, 8 Ω

06750-021

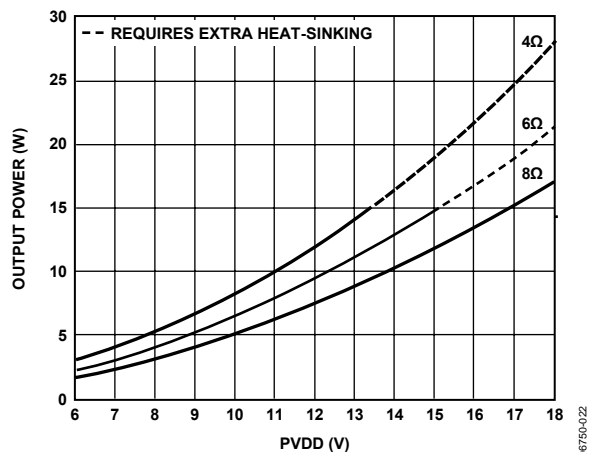


Figure 23. Output Power vs. PVDD, 40 dB THD + N

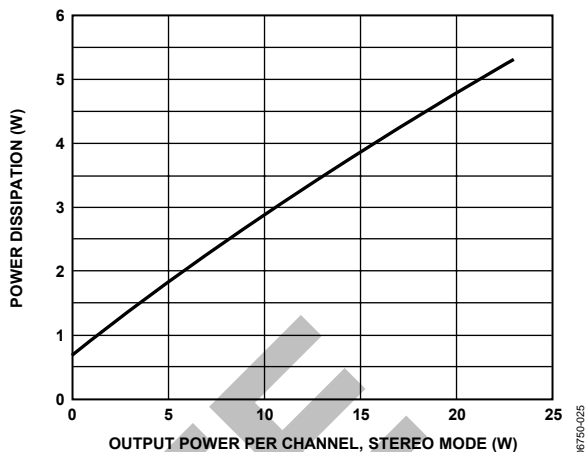


Figure 26. Power Dissipation vs. Output Power, 6Ω

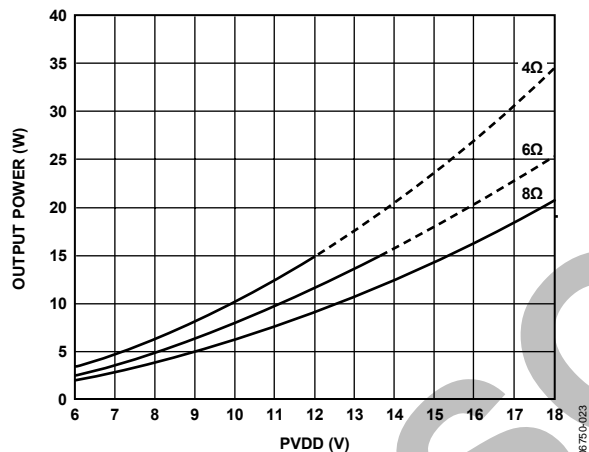


Figure 24. Output Power vs. PVDD, 20 dB THD + N

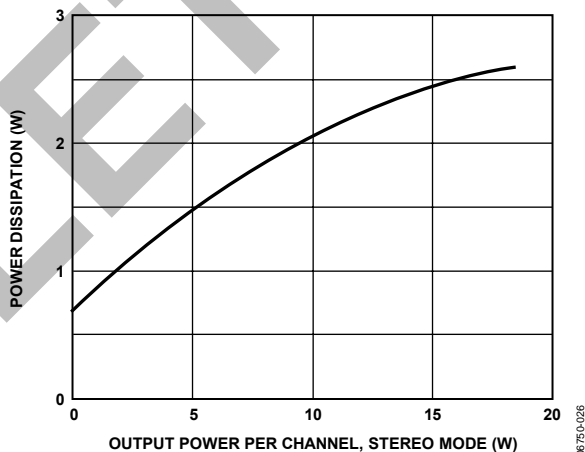


Figure 27. Power Dissipation vs. Output Power, 8Ω

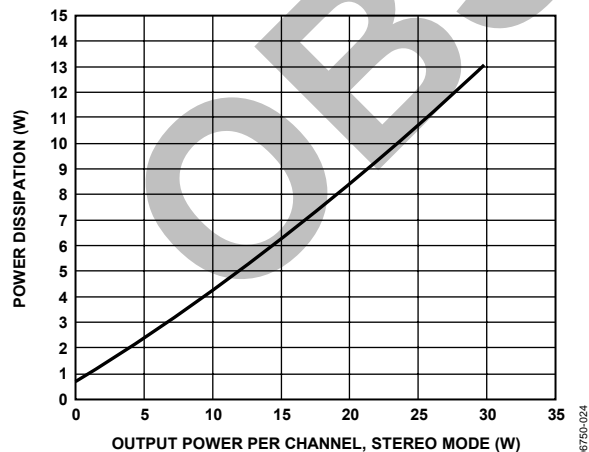


Figure 25. Power Dissipation vs. Output Power, 4Ω

THEORY OF OPERATION

OVERVIEW

The ADAU1513 is a 2-channel integrated power stage designed to accept the logic level PWM inputs. The PWM inputs are amplified, low-pass filtered using a simple passive LC network, and then can be used to drive the speaker loads. The power stage has built-in circuits for overtemperature, overcurrent, short-circuit, and undervoltage protection.

POWER STAGE

The 2-channel ADAU1513 power stage comprises a total of eight half bridges. Each half bridge is made up of PMOS and NMOS devices. The gate drive for the respective FETs is generated internally and does not need a special gate drive supply or bootstrap capacitor compared to all NMOS stages. This simplifies the high-side driver design and requires less external components.

PROTECTION CIRCUITS

The ADAU1513 includes comprehensive protection circuits. It includes thermal warning, thermal overheat, and overcurrent or short-circuit protection on the outputs. The $\overline{\text{ERR}}$ and $\overline{\text{OTW}}$ outputs are open drain, requiring external pull-up resistors. The outputs are capable of sinking 10 mA. The open-drain outputs are useful in multichannel applications where more than one ADAU1513 are used. The error outputs of multiple ADAU1513s can be ORed to simplify the system design. The logic outputs of the error flags ease the system design using a microcontroller.

The power stage does not consist of protection in case PWM input stays high continuously. In such a case, the output produces dc and it is possible to damage the speaker. To prevent this, ensure that the modulator is switching whenever the power stage is turned on.

THERMAL PROTECTION

Thermal protection in the ADAU1513 is categorized into two error flags: one as thermal warning and the other as thermal shutdown. When the device junction temperature reaches near 135°C ($\pm 5^\circ\text{C}$) the ADAU1513 outputs a thermal warning error flag by pulling $\overline{\text{OTW}}$ (Pin 10) low. This flag can be used by the microcontroller in the system as an indication to the user or can be used to lower the input level to the amplifier to prevent the thermal shutdown. The device continues operation until shutdown temperature is reached.

When the device junction temperature exceeds 150°C the device outputs an error flag by pulling the $\overline{\text{ERR}}$ (Pin 9) low. This error flag is latched. To restore the operation, $\overline{\text{MUTE}}$ (Pin 16) needs to be toggled to low and then to high again.

OVERCURRENT PROTECTION

The overcurrent protection in the ADAU1513 is set internally at 5 A peak output current. The device protects the output devices against excessive output current by pulling the $\overline{\text{ERR}}$ (Pin 9) low.

This error flag is latched type. To restore the normal operation, $\overline{\text{MUTE}}$ (Pin 16) needs to be toggled to low and then to high again. The error flag is useful for the microcontroller in the system to indicate an abnormal operation and to initiate the audio $\overline{\text{MUTE}}$ sequence. The device senses the short-circuit condition on the outputs after the LC filter. Typical short-circuit conditions include shorting of the output load and shorting to either PVDD or GND.

UNDervoltage PROTECTION

The ADAU1513 has an undervoltage protection circuit that senses the undervoltage on PVDD. When the PVDD supply goes below the operating threshold, the output FETs are turned to a high-Z condition. Also, the device issues an error flag by pulling the $\overline{\text{ERR}}$ pin low. This condition is latched. To restore the operation, $\overline{\text{MUTE}}$ (Pin 16) needs to be toggled to low and then to high again.

AUTOMATIC RECOVERY FROM PROTECTIONS

In certain applications, it is desired for the amplifier to recover itself from thermal protection without the need for system microcontroller intervention.

The ADAU1513 thermal protection circuit issues two error signals for this purpose: one thermal warning ($\overline{\text{OTW}}$) and the other thermal shutdown ($\overline{\text{ERR}}$).

With these two error signals, there are two options for using the protections:

- Option 1: Using $\overline{\text{OTW}}$
- Option 2: Using $\overline{\text{ERR}}$

The following sections provide further details of these two options.

Option 1: Using $\overline{\text{OTW}}$

The $\overline{\text{OTW}}$ pin is pulled low when the die temperature reaches 130°C to 135°C. This pin can be wired to the $\overline{\text{MUTE}}$ pin using an RC circuit as shown in Figure 28.

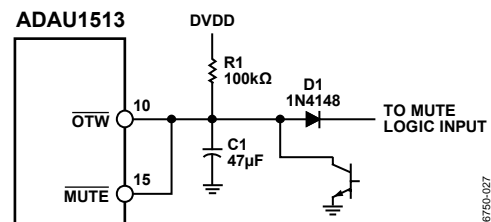


Figure 28. Option 1 Schematic for Autorecovery

The low logic level on $\overline{\text{OTW}}$ also pulls down the $\overline{\text{MUTE}}$ pin. The bridge is shut down and, therefore, starts cooling or the die temperature starts reducing. When it reaches 120°C, the $\overline{\text{OTW}}$ signal starts going high. While this pin is tied to a capacitor with a resistor pulled to DVDD, the voltage on this pin starts rising slowly towards DVDD. When it reaches the input logic high threshold, $\overline{\text{MUTE}}$ is deasserted and the

amplifier starts functioning again. This cycle repeats itself depending on the input signal conditions and the temperature of the die. This option allows part operation that is safely below the shutdown temperature of 150°C and allows the amplifier to recover itself without the need for microcontroller intervention.

Option 2: Using ERR

Option 2 is similar to Option 1 if the ERR pin can be tied to MUTE instead of OTW. See the circuit in Figure 29.

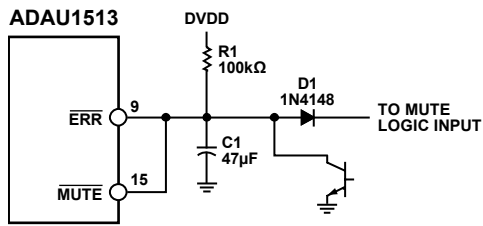


Figure 29. Option 2 Schematic for Autorecovery

In this case, the part goes into shutdown mode due to any of the error-generating events like output overcurrent, overtemperature, missing PVDD or DVDD, or clock loss. The part recovers itself based on the same circuit operation in Figure 28.

However, if the part goes into error mode due to overtemperature, then the device would have reached its maximum limit of 150°C (15°C to 20°C higher than Option 1). If it goes into error mode due to an overcurrent from a short circuit on the speaker outputs, then the part will keep itself recycling on and off until the short circuit is removed.

It is possible that, with this operation, the part is subjected to a much higher temperature and current stress continuously. This, in turn, reduces the part's reliability in the long term. Therefore, using Option 1 for autorecovery from the thermal protection and using the system microcontroller to indicate to the user of an error condition is recommended.

MUTE AND STDN

The MUTE and STDN are 3.3 V logic-compatible inputs used to control the turn-on/turn-off for ADAU1513.

The STDN input is active low when the STDN pin is pulled low and the device is in its energy-saving mode. The power stage is in high-Z state. The high logic level input on the STDN pin will wake up the device. The logic circuits are running internally but the power stage is still in high-Z state.

When the MUTE pin is pulled high, the power stage is active and starts responding to PWM inputs. The low level on the MUTE pin disables the power stage and is recommended to be used to mute the audio output. See the Power-Up/Power-Down Sequence section for more details.

POWER-UP/POWER-DOWN SEQUENCE

Figure 30 shows the recommended power-up sequence for the ADAU1513.

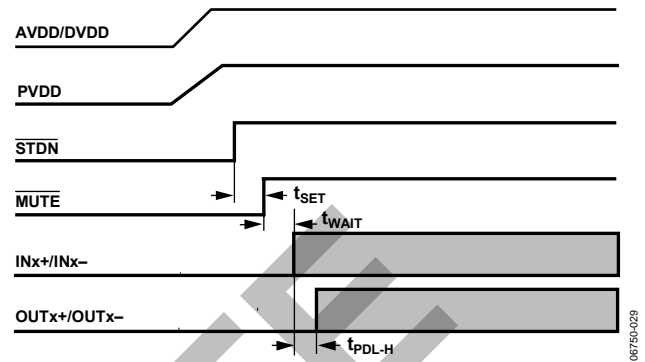


Figure 30. Recommended Power-Up Sequence

The ADAU1513 does not have any pop-and-click suppression circuits; therefore, care must be taken during the power-up. The power stage stays in Hi-Z on power-up. However, it is recommended to ensure that STDN and MUTE are held low during initial power-up. First, STDN should be pulled high followed by MUTE to turn on the power stage. The power stage turns on after the MUTE signal is pulled high and responds to PWM inputs after a small propagation delay of 200 µs.

The special turn-on sequence may be necessary depending on the PWM used to prevent the turn-on pop or click. However, if the ADAV4201 processor is used, the processor has a built-in special turn-on PWM sequence. The processor sends a unique PWM input start sequence that ensures soft turn-on.

If another modulator is used, care must be taken to ensure that the modulator has built-in pop-and-click suppression. Also, because the power stage does not track the PWM inputs, it is recommended to use the system microcontroller to ensure that the modulator is ready to send the PWM sequence before turning on the power stage.

Similarly, for muting the amplifier, it may be necessary to supply a special muting PWM sequence for minimum pop and click. The ADAV4201 processor has a built-in feature that takes care of this need. If any other modulator is used, care must be taken during muting of the power stage.

The system microcontroller can be used to handle the mute/unmute of the power stage as well as a modulator.

The error outputs of the power stage should be connected to the microcontroller port. This error flag can be used to inform the modulator that the power stage is shut down and to mute the PWM inputs. On removal of the error condition, the microcontroller should initiate an unmute sequence to minimize pop and click while power stage is turning on/turning off.

The ADAU1513 uses three separate supplies: AVDD (3.3 V analog for internal reference), DVDD (3.3 V digital for control logic and clock oscillator), and PVDD (9 V to 18 V power stage and level shifter). Separate pins are provided for the AVDD,

ADAU1513

DVDD, and PVDD supply connections, as well AGND, DGND, and PGND.

In addition, the ADAU1513 incorporates a built-in undervoltage lockout logic on DVDD as well as PVDD. This helps detect undervoltage operation and eliminates the need to have an external mechanism to sense the supplies.

The ADAU1513 monitors the DVDD and PVDD supply voltages and prevents the power stage from turning on if either of the supplies are not present or below the operating threshold. Therefore, if DVDD is missing or below the operating threshold, for example, the power stage will not turn on, even if the PVDD is present or vice versa.

Because this protection is only present on DVDD and PVDD and not on AVDD, shorting both AVDD and DVDD externally or generating AVDD and DVDD from one power source is recommended. This ensures both AVDD and DVDD supplies are tracking each other and avoids the need to monitor the sequence with respect to PVDD. This also ensures minimal pop and click during power-up.

When using separate AVDD and DVDD supplies, ensure that both supplies are stable before unmuting or turning on the power stage.

During power-up, it is recommended to keep $\overline{\text{STDN}}$ and $\overline{\text{MUTE}}$ low to ensure that the power stage stays in high-Z mode.

Similarly, during shutdown, pulling $\overline{\text{MUTE}}$ to logic low before pulling $\overline{\text{STDN}}$ down is recommended. However, where a fault event occurs, the power stage will shut down to protect the part. In this case, depending on the signal level, there is some pop at the speaker.

During shutdown of the power supplies to reduce power consumption, it is highly recommended to mute the amplifier first, followed by pulling $\overline{\text{STDN}}$ low before shutting down any of the supplies. After $\overline{\text{MUTE}}$ is pulled low, the power supplies can be shut down in the following order: PVDD, DVDD, then AVDD. Where AVDD and DVDD are generated from a single source, ensure that PVDD is tuned off before DVDD and AVDD, and after issuing $\overline{\text{MUTE}}$ and $\overline{\text{STDN}}$.

OBSOLETE

APPLICATIONS INFORMATION

Refer to the application schematic in Figure 31 for details on connections and component values. For details on the PWM modulator part, refer to the [ADAV4201](#) data sheet.

For applications with PVDD > 15 V, add components R1 and R2 = 10 Ω typical, C5 and C6 = 680 pF typical, and D1 through D8 = CRS01/02.

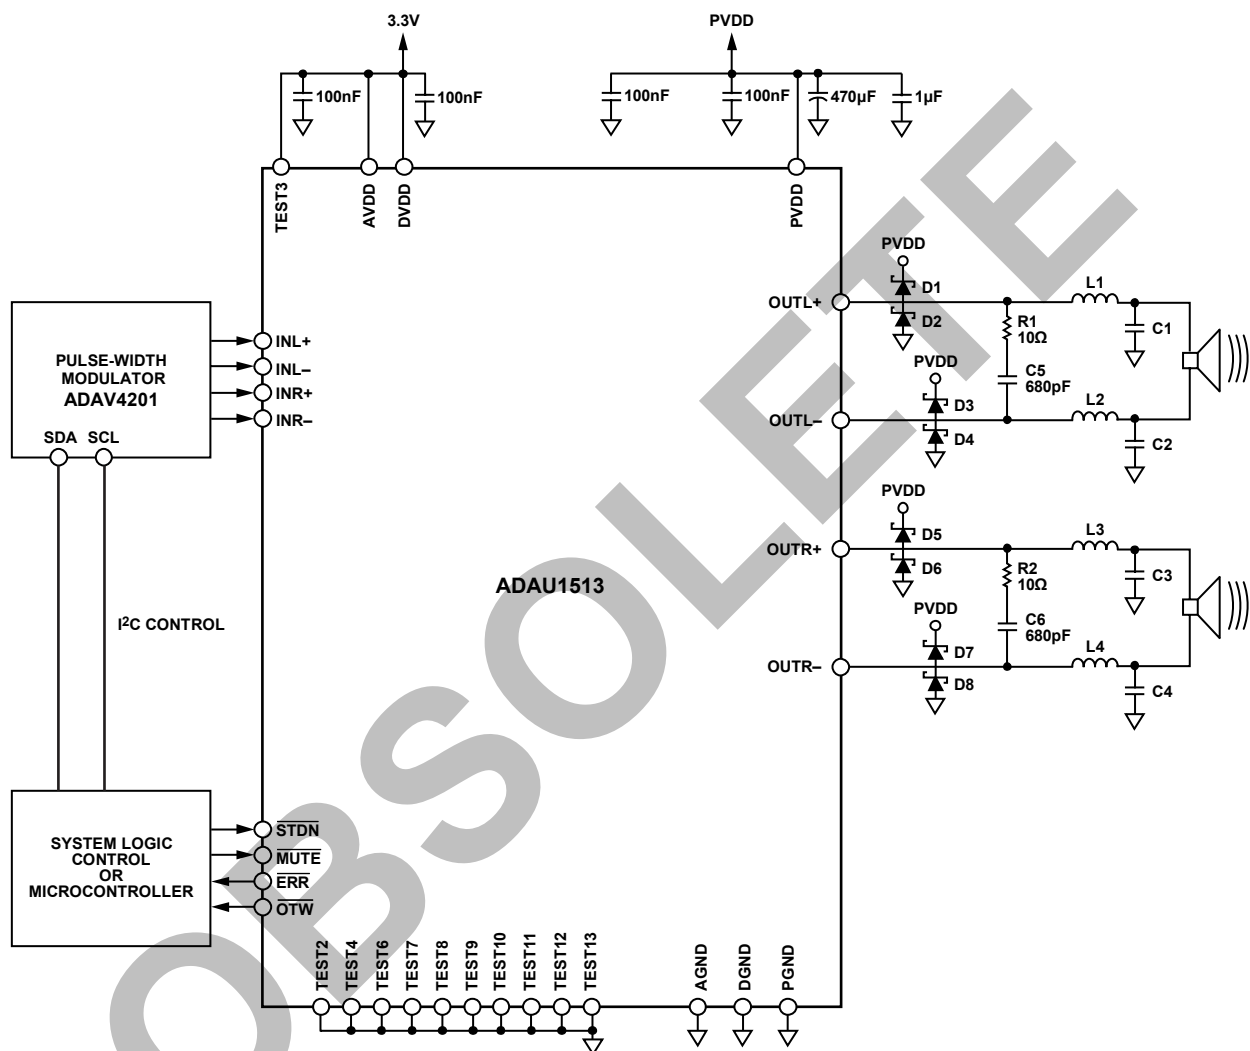



Figure 31. Application Schematic

06750-030


Table 8. Suggested Low-Pass Filter Values

| Load Impedance (Ω) | Inductance L1 to L4 (µH) | Capacitance C1 to C4 (µF) |
|--------------------|--------------------------|---------------------------|
| 4 | 10 | 1.5 |
| 6 | 15 | 1 |
| 8 | 22 | 0.68 |

OUTLINE DIMENSIONS

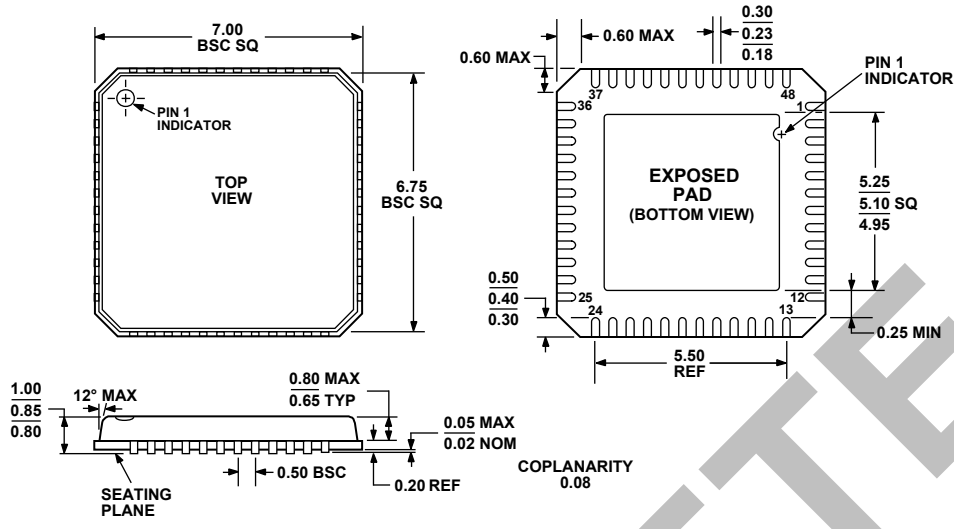

COMPLIANT TO JEDEC STANDARDS MO-220-VKGD-2
 Figure 32. 48-Lead Lead Frame Chip Scale Package [LFCSP_VQ]
 7 mm x 7 mm Body, Very Thin Quad
 (CP-48-1)
 Dimensions shown in millimeters

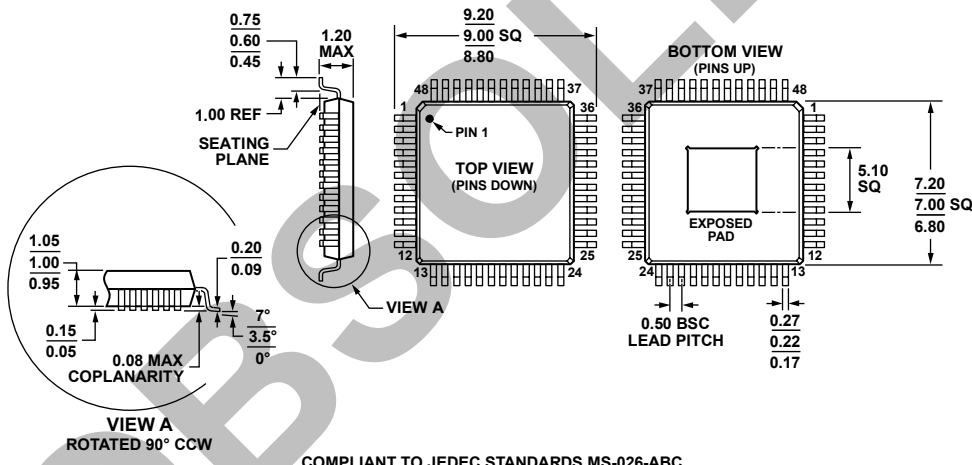

COMPLIANT TO JEDEC STANDARDS MS-026-ABC
 Figure 33. 48-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP]
 (SV-48-5)
 Dimensions shown in millimeters

ORDERING GUIDE

| Model | Temperature Range | Package Description | Package Option |
|-------------------------------|-------------------|--|----------------|
| ADAU1513ACPZ ¹ | -40°C to +85°C | 48-Lead Lead Frame Chip Scale Package [LFCSP_VQ] | CP-48-1 |
| ADAU1513ACPZ-RL ¹ | -40°C to +85°C | 48-Lead Lead Frame Chip Scale Package [LFCSP_VQ], 13" Tape and Reel | CP-48-1 |
| ADAU1513ACPZ-RL7 ¹ | -40°C to +85°C | 48-Lead Lead Frame Chip Scale Package [LFCSP_VQ], 7" Tape and Reel | CP-48-1 |
| ADAU1513ASVZ ¹ | -40°C to +85°C | 48-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP] | SV-48-5 |
| ADAU1513ASVZ-RL ¹ | -40°C to +85°C | 48-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP], 13" Tape and Reel | SV-48-5 |
| ADAU1513ASVZ-RL7 ¹ | -40°C to +85°C | 48-Lead Thin Quad Flat Package, Exposed Pad [TQFP_EP], 7" Tape and Reel | SV-48-5 |

¹ Z = RoHS Compliant Part.