



RECOMMENDED P.C.B. LAYOUT


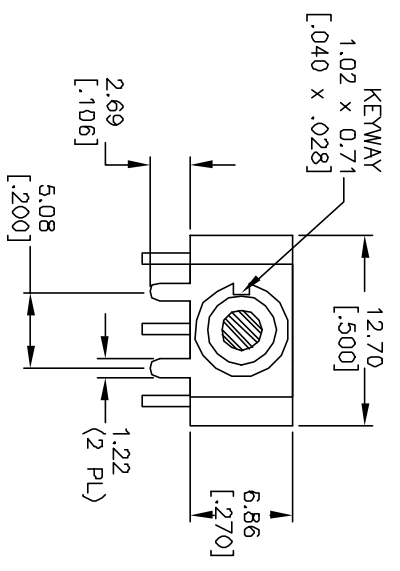


CIRCUIT: SPDT CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NDNE	DN
2-3	DPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) Max. @20V (AC or DC)
5. FIXED TERM. & MOVING CONTACT: Copper Alloy W/Gold plate over Ni Plate
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C.

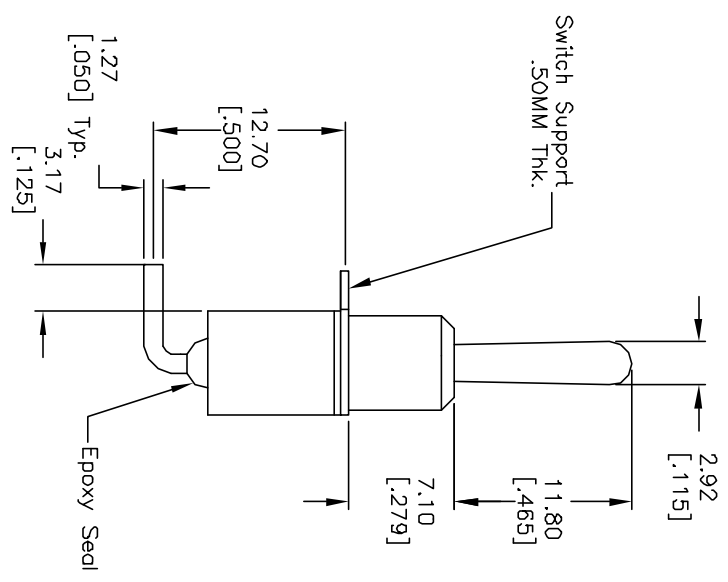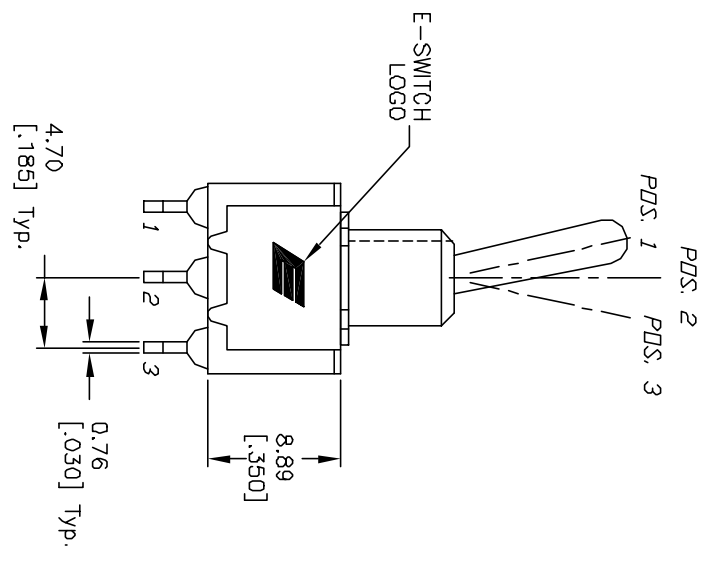

REV. A		ECN No.		11520	
DESCRIPTION		RELEASED FOR PRODUCTION		11520	
DATE		5/31/01		5/31/01	
CHKD		CJB		CJB	
TITLE		100 SP-1 T1 B4 M6 R E		100 SP-1 T1 B4 M6 R E	
SCALE		2:1		2:1	
DATE		5/31/01		5/31/01	
DR		CJB		CJB	
DWG		T111068		T111068	
REV		A		A	



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED