



1	2	3	4	5	6	7
---	---	---	---	---	---	---

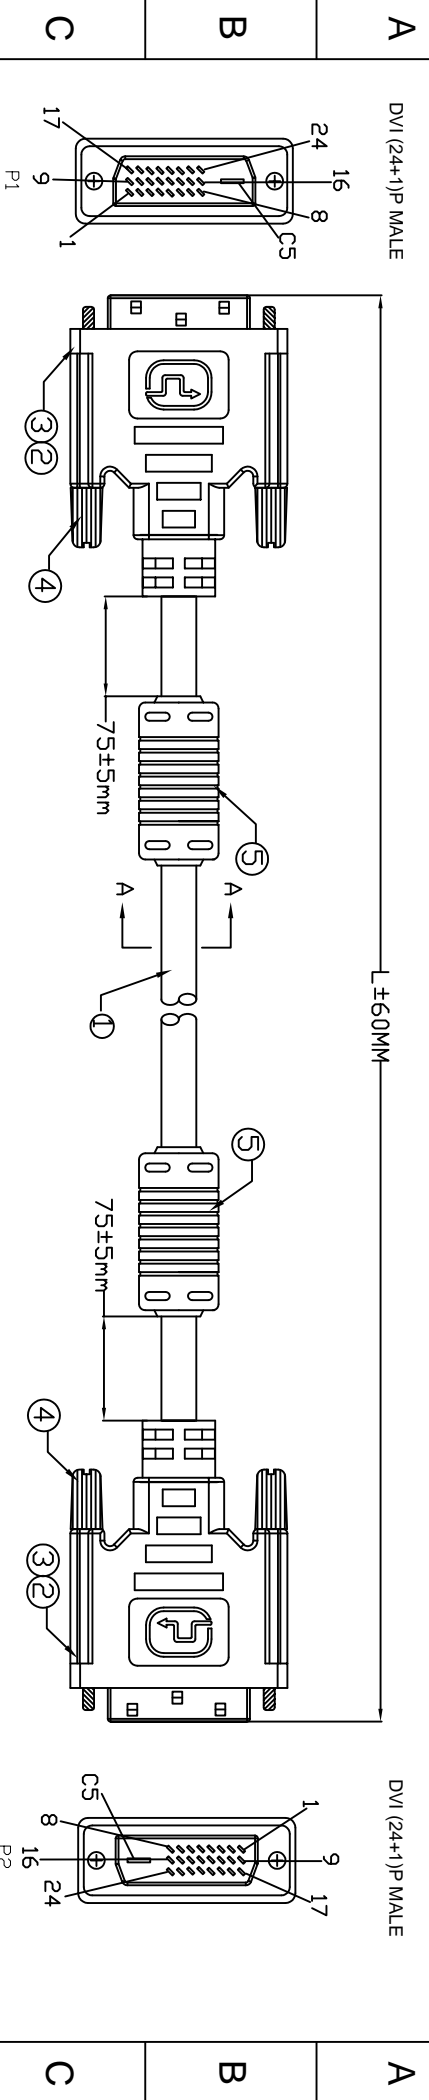

**NOTES:**  
 1. CABLE: UL 20276 30AWG\*7P+30AWG\*1P+30AWG\*3C+ALUMY+D+B OD=7.3±0.20mm JACKET COLOR: BLACK  
 CABLE MUST PRINT: E\*\*\*\*\* AWMM 20276 80°C 30V VW-1  
 2. CONNECTOR: P1&P2: DVI (24+1)P/M, GOLD PLATED CONTACTS; NICKEL PLATED SHELL  
 3.HOOD: MOLDED TYPE,ABS,COLOR:BLACK  
 4.THUMB SCREW: #4-40 UNC, MOLDED TYPE,PVC 45F,COLOR:BLACK  
 5.FERRITE CORE:MOLDED BLACK PVC.  
 6.ELECTRICLE TEST:  
 (1)100% OPEN SHORT & MIS WIRE TEST.  
 (2)CONTACT RESISTANCE 3 ohm Max.  
 (3)INSULATION RESISTANCE 10M ohm Min.  
 (4)HI-POT TEST:DC 300V/10ms

Scale	FREE	Date	Name	Customer-No.
TOLERANCE		02.07.2009	Rate	
X.	±X	Approved	16.06.2014	Joanna
X.X	±X			
X.XX	±X			
DIM	TOL	ASSMANN WSW-No. AK-320101-xxx-S		
X.°	±X°	Drawing-No. ASS 3626 CA rev02		
X.X°	±X°	Replace Sheet		
Angle	TOL			

ASSMANN WSW P/N	LENGTH
AK-320101-020-S	2.0 M
AK-320101-030-S	3.0 M
AK-320101-050-S	5.0 M
AK-320101-100-S	10.0 M

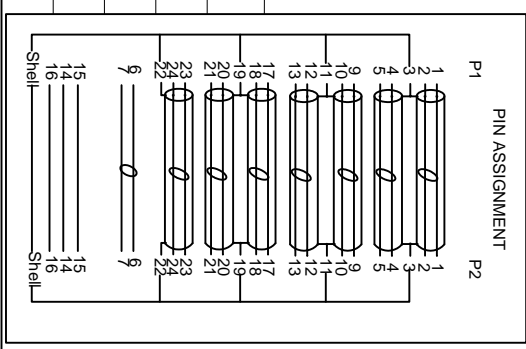

1	2	3	4	5	6	7
---	---	---	---	---	---	---

**ROHS compliant**  
 Unit:mm



ASS 3626 CA rev02