

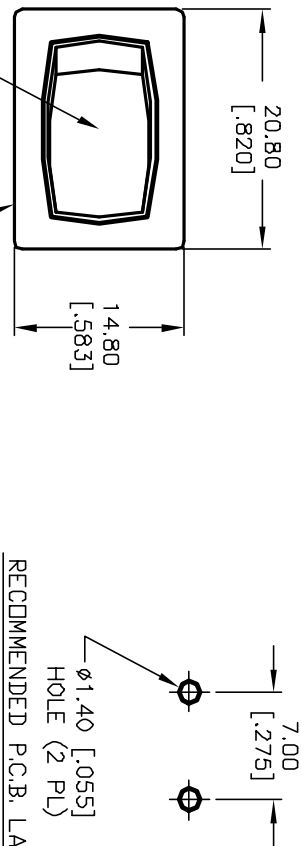



PANEL THICKNESS	X dimension
0.75-1.25 [.030-.049]	19.2-.01 [.756]
1.25-2.0 [.049-.079]	19.4-.01 [.764]
2.0-3.0 [.079-.118]	19.8-.01 [.780]


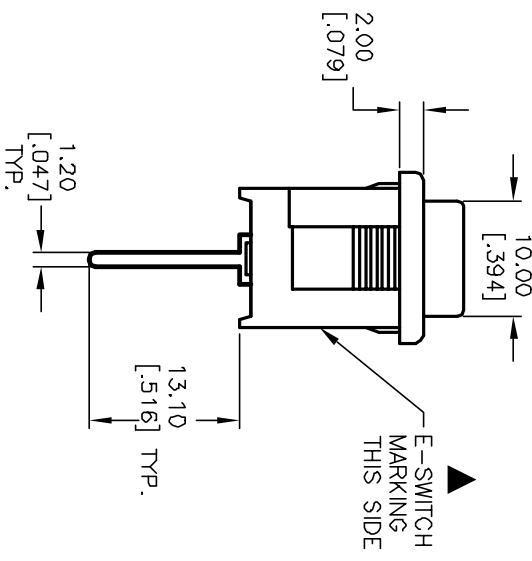


BLACK ACTUATOR
PDS. 1

BLACK BODY/HOUSING

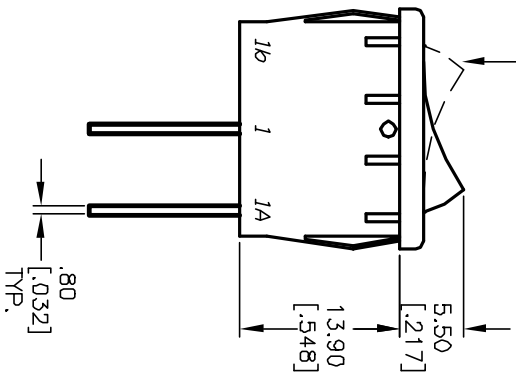

SWITCH FUNCTION	POS. 1	POS. 2
(DN)	DN	OFF
1-1a	OPEN	

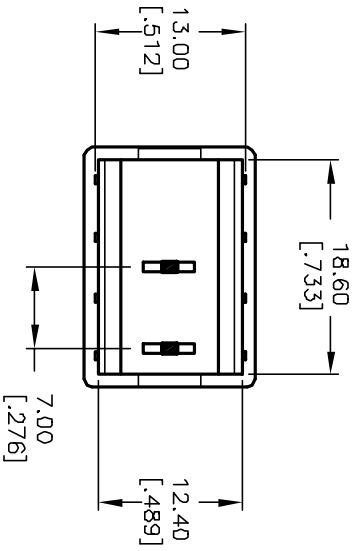

E-SWITCH®

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. RATING: 15A @ 125VAC OR
6A @ 250VAC
 5. MATERIALS: TERMINALS: Silver Plated Copper Alloy
CONTACTS: Coin Silver, Silver Plated
 6. ELECTRICAL LIFE: 10,000 cycles
 7. CONTACT RESISTANCE: <20 Mega Ω
 8. INSULATION RESISTANCE: >1000 Mega Ω
 9. DIELECTRIC STRENGTH: >1500 V 1 minute
>3000 V between poles

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12252	RELEASED FOR PRODUCTION	7/11/02	CJB

TITLE	SCALE	DATE	DR	DWG	REV
R1966F BLK BLK EP	1.5:1	7/11/02	CB	M304212	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED