



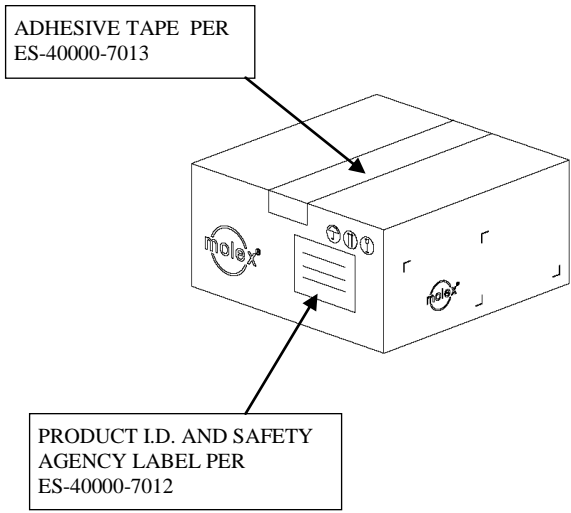

PACKAGING SPECIFICATION

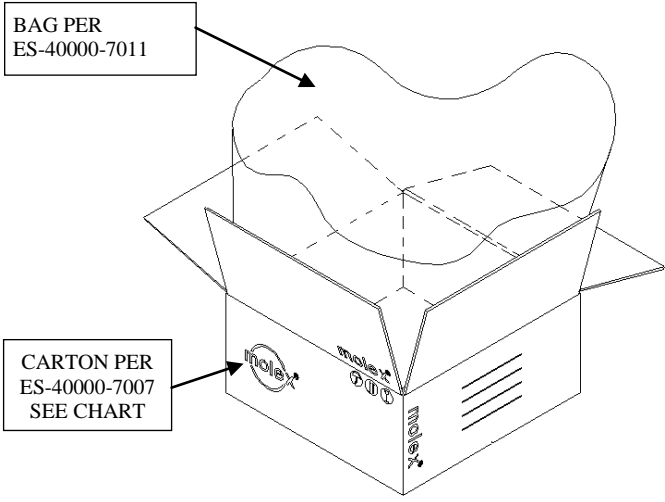

- 1) CARTON TOPS AND BOTTOMS TO BE SEALED WITH A 2" WIDE ADHESIVE TAPE. STAPLING OF THE BOTTOM OF THE CARTON IS ACCEPTABLE.
- 2) USE PRESCRIBED BOX AND LINER BAG PER CHART BELOW. BAG MUST BE SEALED WITH TWIST LOCK 313017300, TWIST TIE OR EQUIVALENT.
- 3) PARTS TO BE MOISTURIZED PER AS-45499-001 IF REQUIRED PER CHART. FOR 5559-*P2-400, 5559-*P2-225, 5559-*P4-400, 5559-*P4-225, 172646-**12, USE PAD AND BAG METHOD PER AS-45499-001.
- 4) THIS PACKAGING SPECIFICATION ALSO APPLIES TO 172646-***2 PARTS AS 5559-**-P2-*** AND 172646-***3 PARTS AS 5559-**-P3-***

CKT	ENG. NO. (SEE NOTE 4)	BAG PART #	PARTS PER CARTON		MOISTURIZE
			96707-0014	--	SEE NOTE 3
2	5559-02P2-***	31300-8790	6000	--	YES
2	5559-02P3-***	31300-8790	8000	--	NO
3	5559-03P2-***	31300-8790	5000	--	YES
3	5559-03P3-***	31300-8790	6000	--	NO
3	5559-03P5-***	31300-8790	6000	--	NO
4	5559-04P2-***	31300-8790	3500	--	YES
4	5559-04P3-***	31300-8790	5000	--	NO
5	5559-05P2-***	31300-8790	3000	--	YES
5	5559-05P3-***	31300-8790	4000	--	NO
6	5559-06P2-***	31300-8790	2500	--	YES
6	5559-06P3-***	31300-8790	3000	--	NO

REVISION: A9	ECR/ECN INFORMATION: EC No: 167997 DATE: 2017/11/10	TITLE: BULK PACKAGING SPECIFICATION FOR SINGLE ROW 5559 SERIES	SHEET No. 1 of 1
DOCUMENT NUMBER: PK-5559-003	CREATED / REVISED BY: AZAHIROVIC	CHECKED BY: JBELL	APPROVED BY: FSMITH