



CQ-P1076

REV	DOCUMENT	CHANGED BY	CHECK
5	206138	TSM 01AUG02	SAV
6	0005782	RJ 04JUN04	AK

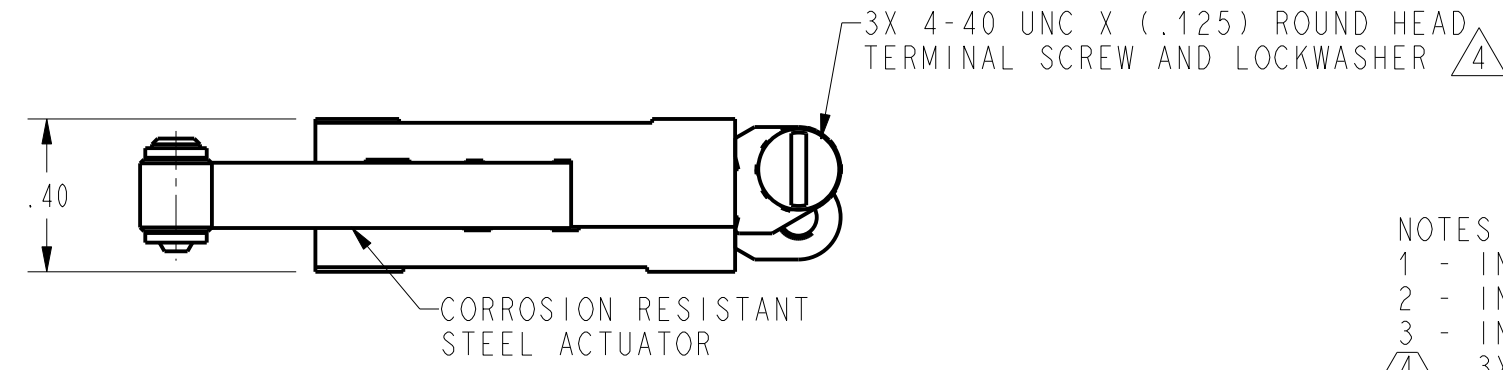

- NOTES
- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACT
 - 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
 - 3 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN
 - 4 - 3X TERMINAL SCREW (PART NO VP-10320) AND 3X LOCKWASHER (PART NO. VP-14672) FURNISHED UNASSEMBLED

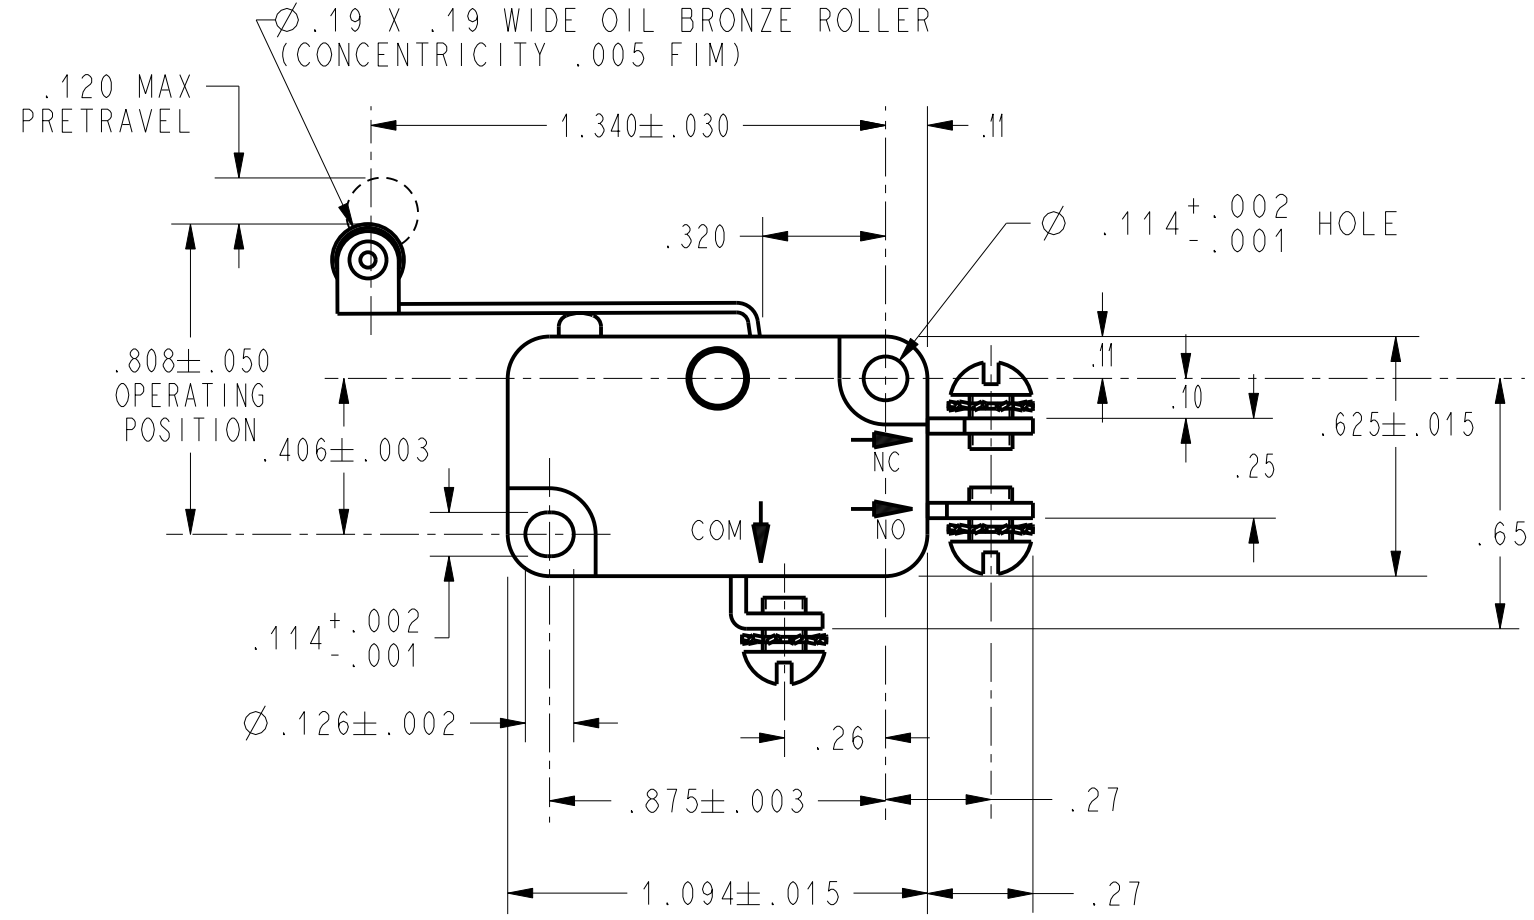

CHARACTERISTICS	
OPERATING FORCE-----	5 OZ MAX
DIFFERENTIAL TRAVEL-----	.042 MAX
OVERTRAVEL-----	.050 MIN
RELEASE TRAVEL-----	.011 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
L22 1A 125 VAC	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:			
	<input checked="" type="checkbox"/> US (inch) CUSTOMARY	<input type="checkbox"/> SI (mm) METRIC	
NO PLACE	X	$\pm .040$	± 1
ONE PLACE	.X	$\pm .030$	$\pm 0,4$
TWO PLACE	.XX	$\pm .015$	$\pm 0,15$
THREE PLACE	.XXX	$\pm .005$	\pm
ANGLES		\pm	\pm
RAW MATERIAL-COMMERCIAL STANDARD			
THIRD ANGLE PROJECTION			

DRAWN	TSM	01AUG02
CHECK	SAV	01AUG02
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		
PTC 2D	ASME Y14.5M-1994	

Honeywell			
TITLE SWITCH, BASIC			
SIZE	DWG TYPE	DRAWING NAME	REV
B	I	V3L-1376	6
SCALE 2 : 1	WEIGHT	SHEET	1 OF 1