

SPECIFICATION CONTROL DRAWING


TU * 100 22B

TITLE CABLE, ELECTRIC, RADIATION-CROSSLINKED, MODIFIED FLUOROPOLYMER-INSULATED, AWG 22-EQUIVALENT, BARE COPPER

Date 12-21-95

Revision H

This specification sheet forms a part of the latest issue of Raychem Specification 50.

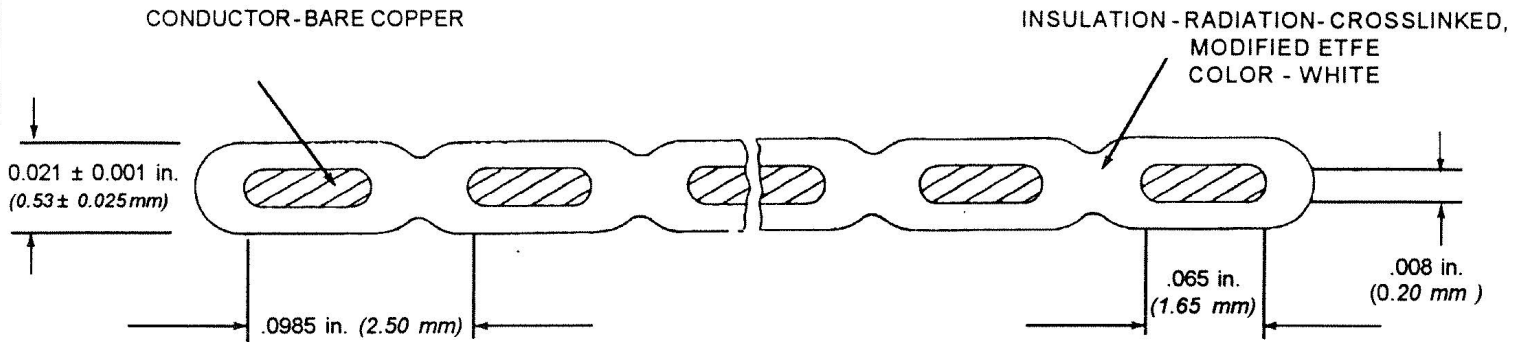

CABLE CONSTRUCTION DETAILS

PART NUMBER	NUMBER OF CONDUCTORS	NOMINAL CABLE WIDTH ± .016 in. (± 0.41 mm)	MAXIMUM CABLEWEIGHT lb/1000 ft. (kg/km)
TU 04 100 22B	4	0.394 (10.0 mm)	13.4 (19.9)
TU 05 100 22B	5	0.494 (12.5 mm)	16.8 (25.0)
TU 10 100 22B	10	0.987 (25.1 mm)	33.3 (49.6)
TU 20 100 22B	20	1.972 (50.1 mm)	66.6 (99.1)

ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: -55° to 150°C
 VOLTAGE RATING: 450 volts (rms)
 ACCELERATED AGING: 300 ± 3°C for 7 hours
 0.25 in. (6.4 mm) mandrel, 4.0 lb (including weight of clamp)
 BLOCKING: 200°
 CONDUCTOR RESISTANCE: (at 20°C):
 17.0 ohms/1000 ft. (55.8 ohms/km) (maximum)
 FLAMMABILITY: 3 seconds (maximum), 3 in. (72.6 mm) (maximum)

FLEXING ENDURANCE:

TEMPERATURE (°C)	MINIMUM NUMBER OF CYCLES
150 ± 5	400 cycles
-55 ± 5	400 cycles

IDENTIFICATION DURABILITY: 125 cycles, weight 150 g
 IDENTIFICATION OF PRODUCT: The cable shall be marked with "RAYCHEM-(part number from table above) 06090" in green ink along the left edge of one side of the cable

INSULATION FLAWS: 3500 volts (rms)
 INSULATION RESISTANCE: 500 megohms for 1000 ft. (152 megohms for 1 km) (minimum)
 LIFE CYCLE: 200 ± 3° C for 168 hours
 MOISTURE RESISTANCE: 500 megohms for 1000 ft. (152 megohms for 1 km) (minimum)
 SHRINKAGE: 200 ± 3°C for 6 hours, .062 in. (1.57 mm) (maximum) in 12 in. (305 mm)
 VACUUM STABILITY:
 Total Mass Loss (TML), 1.0% (maximum)
 Volatile Condensable Material (VCM), 0.1% (maximum)
 VOLTAGE WITHSTAND (POST ENVIRONMENTAL):
 1500 volts, 60 Hz

PART NUMBER:

The "22" in the part numbers above shall indicate the equivalent round wire size (AWG), which is based on conductor cross section.
 The "B" in the part numbers above shall indicate the bare copper conductor material.
 The "" the part number above shall indicate the number of conductors.

tyco
Electronics

© 2006 Tyco Electronics Corporation. All rights reserved

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 1-800-2 RAYCHEM FAX: 415-381-6297