



SUGGESTED PANEL CUTOUT



MATERIALS

- BODY:
Polyamide 6/6 (PA66), UL94 V-2
- ACTUATOR:
Polyamide 6/6 (PA66), UL94 V-2
- SEALING MEMBRANE:
Polyvinyl Chloride (PVC)
- SPRING:
Piano Wire
- MOBILE CONTACT BAR:
Copper
- CONTACT PADS:
Silver Clad Copper
- RIVETS:
Copper
- TERMINALS:
Brass





SPECIFICATIONS

- FUNCTION:
2P1T OFF-ON
- RATINGS:
ANSI/UL 508 and CAN/CSA C22.2 No.14 (E195908):
20A 125VAC [cURus]
15A 277VAC [cURus]
2HP 110/250VAC [cURus]
- CONTACT RESISTANCE:
Initial: 10mΩ Max.
- ELECTRICAL LIFE:
6,000 Cycles [cURus]
- TEMPERATURE:
Operating: 0°C to 40°C [cURus]
- INGRESS PROTECTION:
IP54
- APPROVALS:
 RoHS
COMPLIANT

COLORS AND MARKINGS

- BODY COLOR:
Black
- ACTUATOR COLOR:
Black
- MARKING:
I/O Vertical (1)
- MARKING COLOR:
White

SCHEMATIC

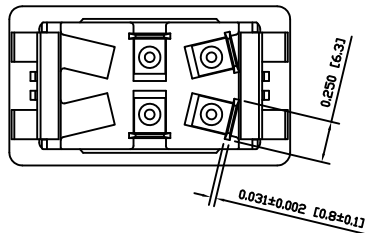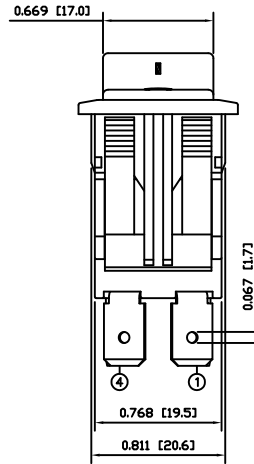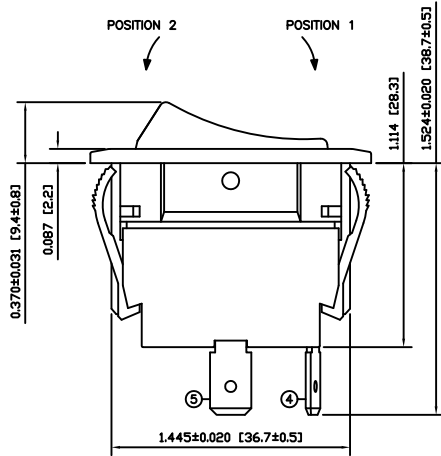

ACTUATOR	B	10/05/26	CAB
BODY	B	10/05/26	CAB
COLORS	A	09/12/07	CAB
MATERIALS	C	10/03/01	CAB
SPECIFICATIONS	C	10/03/01	CAB
REFERENCE	REV.	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	INITIAL RELEASE	19421	10/11/09	CAB
REV.	DESCRIPTION	PCR	DATE	DRAWN BY

DIMENSIONS	
INCHES [MILLIMETERS]	
GENERAL TOLERANCES	
±0.008 [±0.2] / ±1°	
SCALE	PROJECTION
DRAWING NOT TO SCALE	

	E-SWITCH		LAMB INDUSTRIES
TITLE		RVW42D1121	
ITEM NUMBER	DATE	REVISION	
34-RVW42D1121	NOVEMBER 9, 2010	A	