



SECTION A-A
SEE DETAIL "A"



DETAIL A
(N.T.S.)

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	116 Ω	229 Ω	370 Ω
Minimum	- Ω	183 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

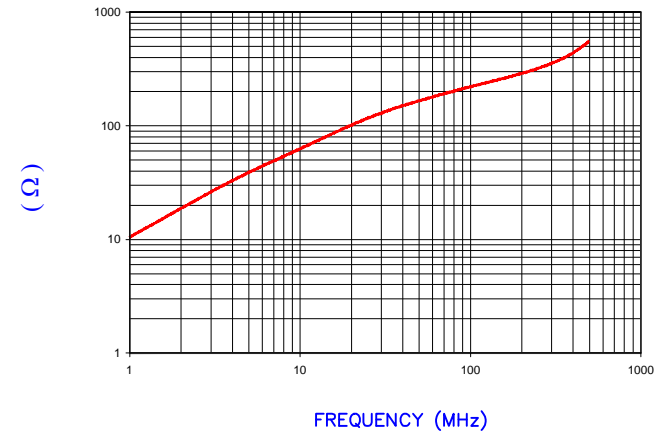

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture

CORE DIMENSIONS: mm[INCHES]


A	18.67 [.735]	+	0.36 [.014]
B	11.18 [.440]	+	0.20 [.008]
C	28.58 [1.125]	+	0.76 [.030]

WEIGHT/1000: 25.22 kgs 55.6 lbs

UNCONTROLLED DOCUMENT

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

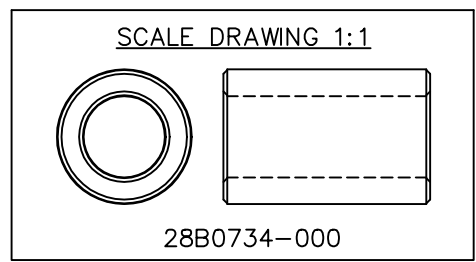

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
J	UPDATE THE LOGO	05/13/15	QIU	PROJECT/PART NUMBER:	REV J
H	UPDATE TEMPLATE	12/25/09	Jcai	28B0734-000	PART TYPE: CNZ CORE
G	REM COATING SPECS, CHG P/N, REMOVE ALL NOTES, ADD CURVE UPDATE Z SPECS	06/10/03	JRK	DATE: 01/11/91	SCALE: 2 : 1
F	CORRECT P/N IN TITLE BLOCK AND DATE	04/11/02	JRK	CAD # 28B0734-000-J	MATERIAL: FERRITE
REV	DESCRIPTION	DATE	INT	TOOL # B0734	

