


1000Base-T Low Profile Magnetics Module

Designed to Support 1:1 Turns Ratios Receivers

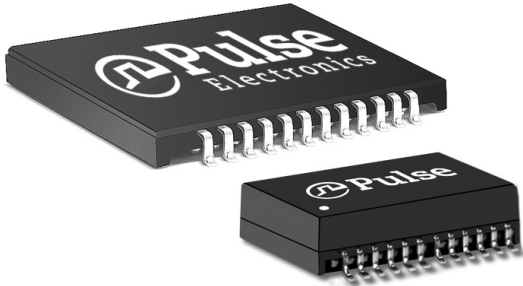

- RoHS-6 peak reflow temperature rating 245°C
- Low profile package for mobile computer applications
- Compliant with IEEE 802.3ab standard

Electrical Specifications @ 25°C - Operating Temperature 0°C to 70°C

Part Number ¹	Insertion Loss (dB MAX)	Return Loss (dB MIN @ 100Ω)		Differential to Common Mode Rejection (dB MIN)	Crosstalk (dB MIN)	Hipot (Vrms MIN)
	1-100 MHz	1-40 MHz	40-100 MHz	30-100 MHz	30-100 MHz	
H5019NL	-1.0	-18	-12 +20*LOG10 (f/80)	-43 +22*LOG10 (f/30)	-55 +24*LOG10 (f/10)	1500
H5019BNL	-1.0	-18	-12 +20*LOG10 (f/80)	-43 +22*LOG10 (f/30)	-55 +24*LOG10 (f/10)	1500
HX5019BNL ³	-1.0	-18	-12 +20*LOG10 (f/80)	-43 +22*LOG10 (f/30)	-55 +24*LOG10 (f/10)	1500
HX5180NL ³	-1.0	-18	-12 +20*LOG10 (f/80)	-43 +22*LOG10 (f/30)	-55 +24*LOG10 (f/10)	1500


Notes:

1. For Tape & Reel packaging, add a "T" suffix at the end of the part number, e.g. H5019NLT.
2. MSL: Moisture Sensitivity Level = 1
3. Extended Temperature: -40°C to +85°C

Mechanicals

Schematic

H5019NL/H5019BNL/HX5019BNL

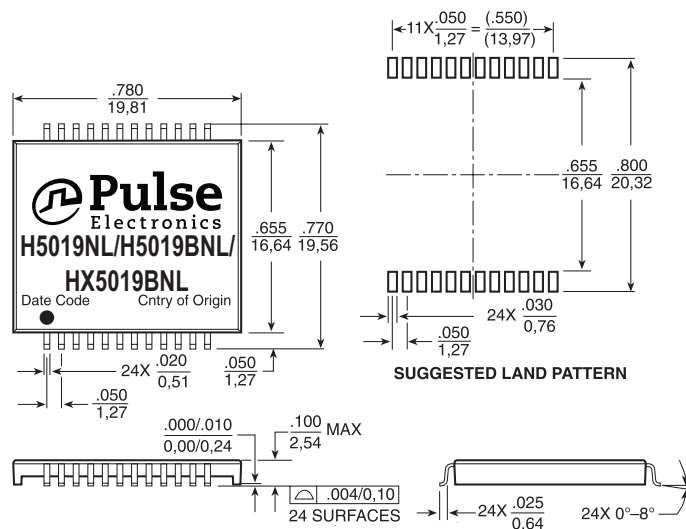

H5019NL

