


Ultra-R2 Rubber Table Mat

Meets ANSI/ESD S20.20 worksurface required limit (and recommendation of ANSI/ESD S4.1) tested per ANSI/ESD S4.1 and ESD TR53. Resistance to solvents, hot solder and soldering irons makes the Ultra-R2 Rubber Table Mat a versatile static-safe worksurface. Electrical performance is accomplished by using a two-layer combination of top color static dissipative and bottom black conductive rubber materials. Compatible with Constant Monitors. Available in rolls, mats and mats with ground cord.

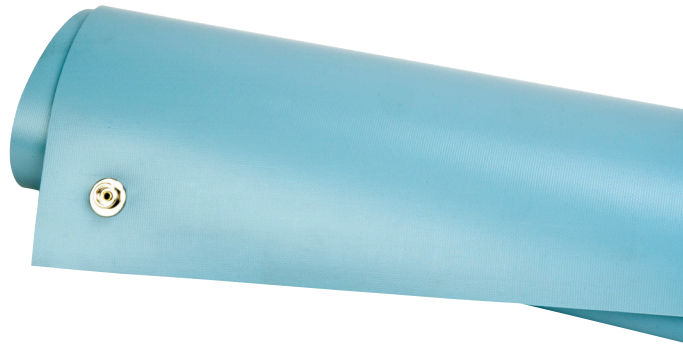

Properties	Typical Value	Test Method
Thickness*	0.064" (1.6 mm)	
Color*	Blue/Black and Gray/Black	
Resistances		
Surface to Ground (Rtg)	1 x 10 ⁶ to < 1 x 10 ⁹ ohms	ANSI/ESD S4.1
Surface to Surface (Rtt)	1 x 10 ⁶ to < 1 x 10 ⁹ ohms	ANSI/ESD S4.1
Tolerance		
	Width +/- 0.250"	
	Length +/- 0.250"	

*Color, texture and thickness may vary between lots and mills.

Mat Item Numbers

Size	Blue	Gray
24" x 36" (0.6 m x 1.2 m)	RM2436L2RBL	RM2436L2RGR
24" x 48" (0.6 m x 1.2 m)	RM2448L2RBL	RM2448L2RGR

Mat Includes:

- 1 Table Mat, size as specified
- 2 [3050](#) Snap Fasteners (installed)



Made in the
United States of America

Table Mat Kit Item Numbers

Size	Blue	Gray
24" x 36" (0.6 m x 1.2 m)	RM2436L2RBL-L	RM2465L2RGR-L
24" x 48" (0.6 m x 1.2 m)	RM2448L2RBL-L	RM2448L2RGR-L

Table Mat Kit Includes:

- 1 Table Mat, size as specified
- 1 [3040](#) 15' (4.6 m) Ground Cord
- 2 [3050](#) Snap Fasteners (installed)

Roll Item Numbers

Size	Blue	Gray
2' x 50' (0.6 m x 15.2 m)	RM24600L2RBL	RM24600L2RGR
3' x 50' (0.9 m x 15.2 m)	RM36600L2RBL	RM36600L2RGR
30" x 50' (0.8 m x 15.2 m)	RM30600L2RBL	RM30600L2RGR
4' x 50' (1.2 m x 15.2 m)	RM48600L2RBL	RM48600L2RGR

Includes roll of matting material.

Specifications and procedures subject to change without notice.

ULTRA-R2 RUBBER TABLE MAT

926 JR Industrial Drive, Sanford, NC 27332
WEB SITE: StaticControl.com
PHONE (919) 718-0000

**DRAWING
NUMBER**
Ultra-R2 Series

DATE
August
2015

SCS