


CDSW4448-G

Reverse Voltage: 75 Volts
Power Dissipation: 400 mW
RoHS Device




Features

- Design for mounting on small surface.
- High speed switching.
- High mounting capability, strong surge withstand, high reliability.
- Also available in other standard case:
 CDSN4448 - 1206 size
 CDSF4448 - 1005 size
 CDSU4448 - 0603 size

Mechanical data

- Case: SOD-123, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Polarity: indicated by cathode band.
- Approx. weight: 0.01 grams

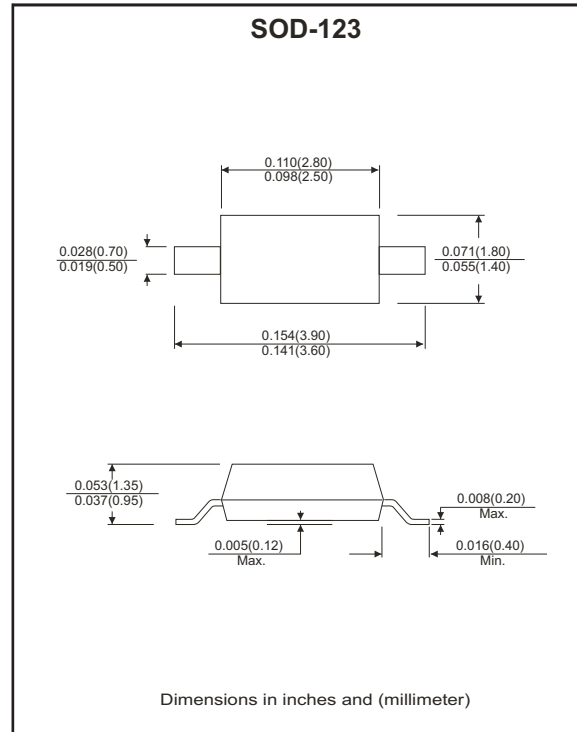

Maximum Ratings and Electrical Characteristics

(at Ta=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Value	Units
Repetitive peak reverse voltage	V _{RRM}		75	V
Reverse voltage	V _R		75	V
Forward current	I _{FM}		500	mA
Peak surge forward current	I _{FSM}	T=1.0 μS	4	A
Power dissipation	P _D		400	mW
Maximum forward voltage	V _F	@I _F =5mA @I _F =10mA @I _F =100mA @I _F =150mA	0.72 0.855 1 1.25	V
Maximum reverse current	I _R	@V _R =75V @V _R =25V	2.5 0.025	μA
Maximum reverse recovery time	T _{rr}	I _F =10mA, R _L =100Ω	4	nS
Typical diode capacitance	C _J	V _R =0V, f=1.0MHz	4	pF
Maximum junction temperature	T _J		125	°C
Storage temperature	T _{STG}		-55 to +125	°C

RATING AND CHARACTERISTIC CURVES (CDSW4448-G)

Fig.1 - Forward Characteristics

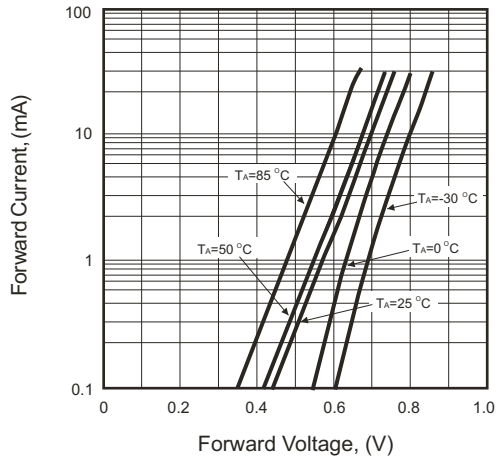


Fig.2 - Reverse Characteristics

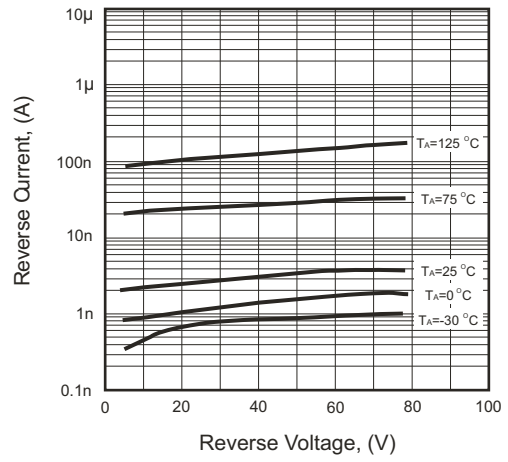


Fig.3 - Capacitance Between Terminals Characteristics

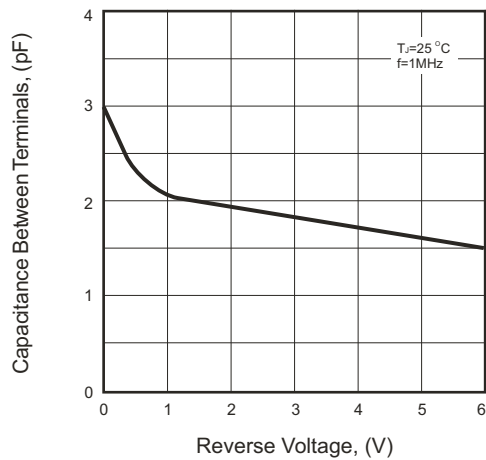


Fig.4 - Power Derating Curve

