


2

1

PANDUIT P/N	WEIGHT
ACB01	0.85kg

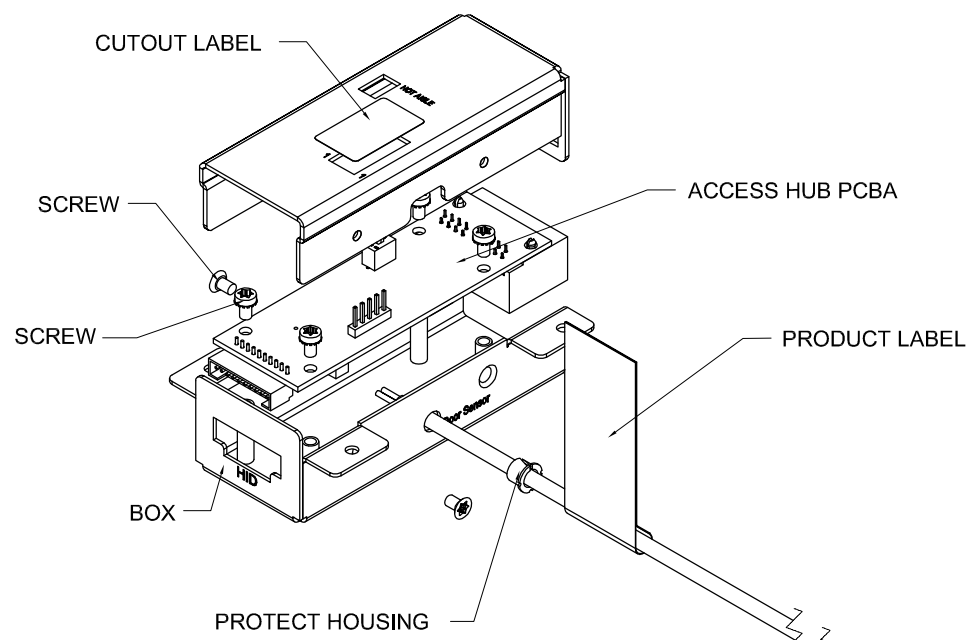

SPECIFICATION:



1. STANDARD
 OPEN DOOR DETECTION: <10mm
 OPERATING TEMPERATURE RANGE: 0°C TO 65°C [32°F TO 149°F]
 OPERATIONAL VOLTAGE: 5 ±0.1 VOLTS
 MAXIMUM POWER DRAW: 1100 mA, ACTIVE
 MAXIMUM POWER DRAW: 150 mA, IDLE
 SENSOR HOUSING MATERIAL: STEEL
 SENSOR HOUSING COLOR: BLACK
 INTERFACE OUTLET: RJ45 COMPLIANT

2. ADDITIONAL:
 NONE

3. ACCESSORY COMPONENTS:
 SCREWS, QTY:(4)
 DOUBLE SIDED TAPE, QTY:(2)
 INSTALLATION GUIDE, QTY:(1)

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
 2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
 3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART

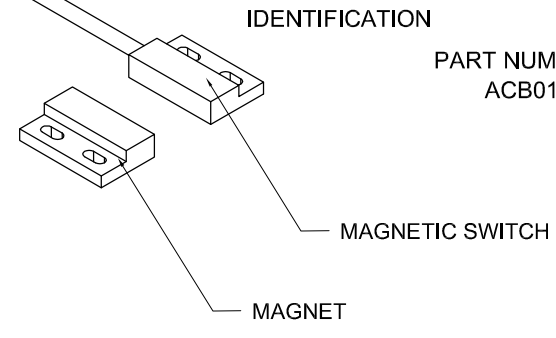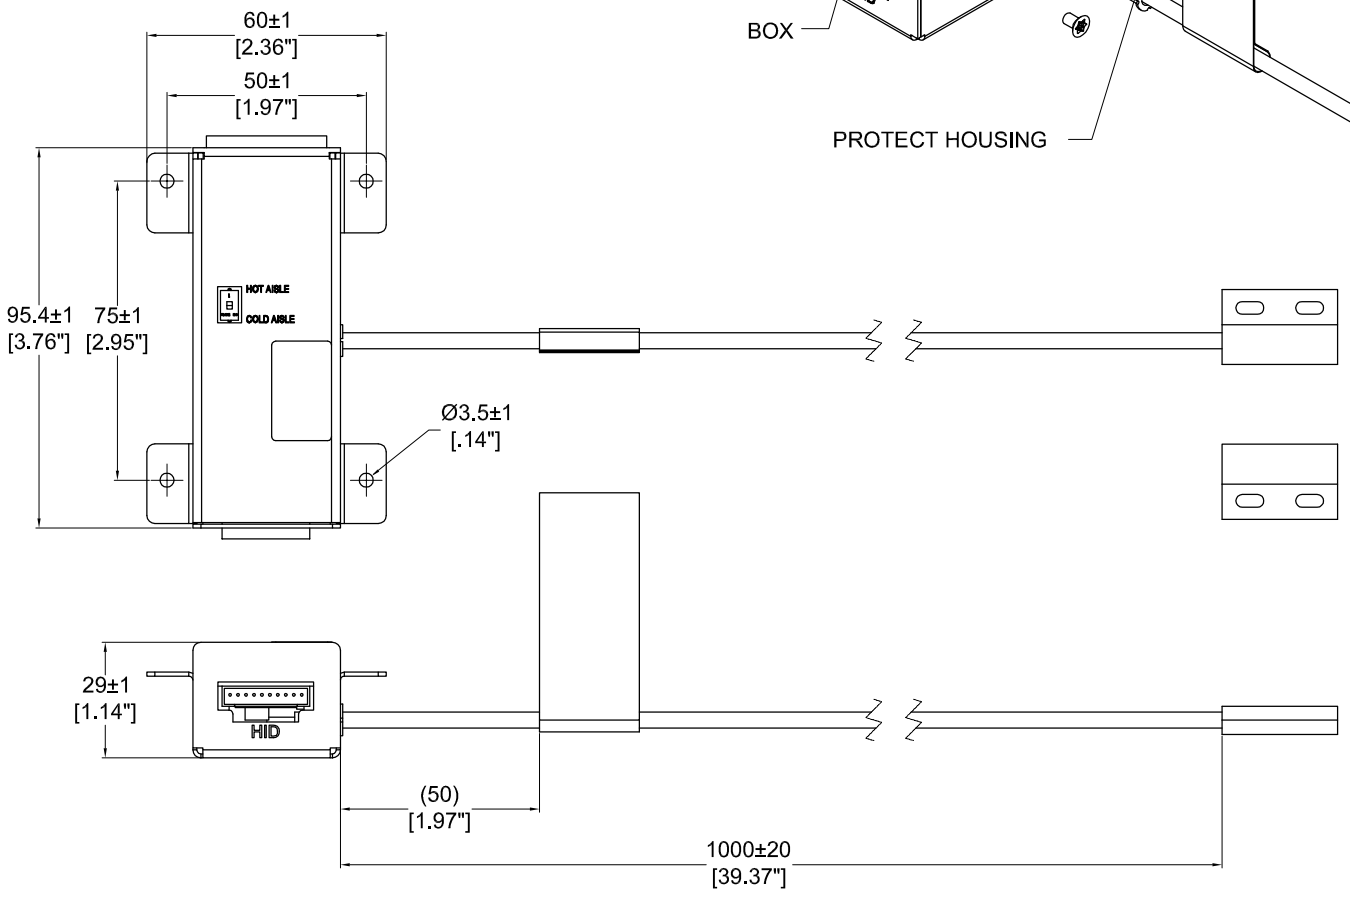

IDENTIFICATION	PART NUMBER	DESCRIPTION
	ACB01	ACCESS HUB

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

PANDUIT

UNLESS OTHERWISE SPECIFIED
 DIMENSIONAL TOLERANCE ARE: mm [IN]
 Wire Harness Tolerance(mm)

THIRD ANGLE PROJECTION

0<4<500 ±10
 500<4<2000 ±20
 2000<4<6000 ±50

TITLE: SMARTZONE G5 ACCESS HUB CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

MATERIAL/COLOR: N/A

DRAWING NUMBER: ACB01_DC

SCALE: SHT 1 OF 1

SCALE: B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	01/04/2018	Felix	MM	DJB	INITIAL RELEASE	ACB01

2

1