

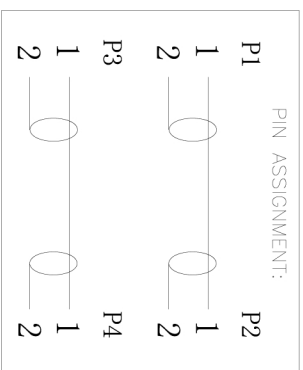


Units: mm

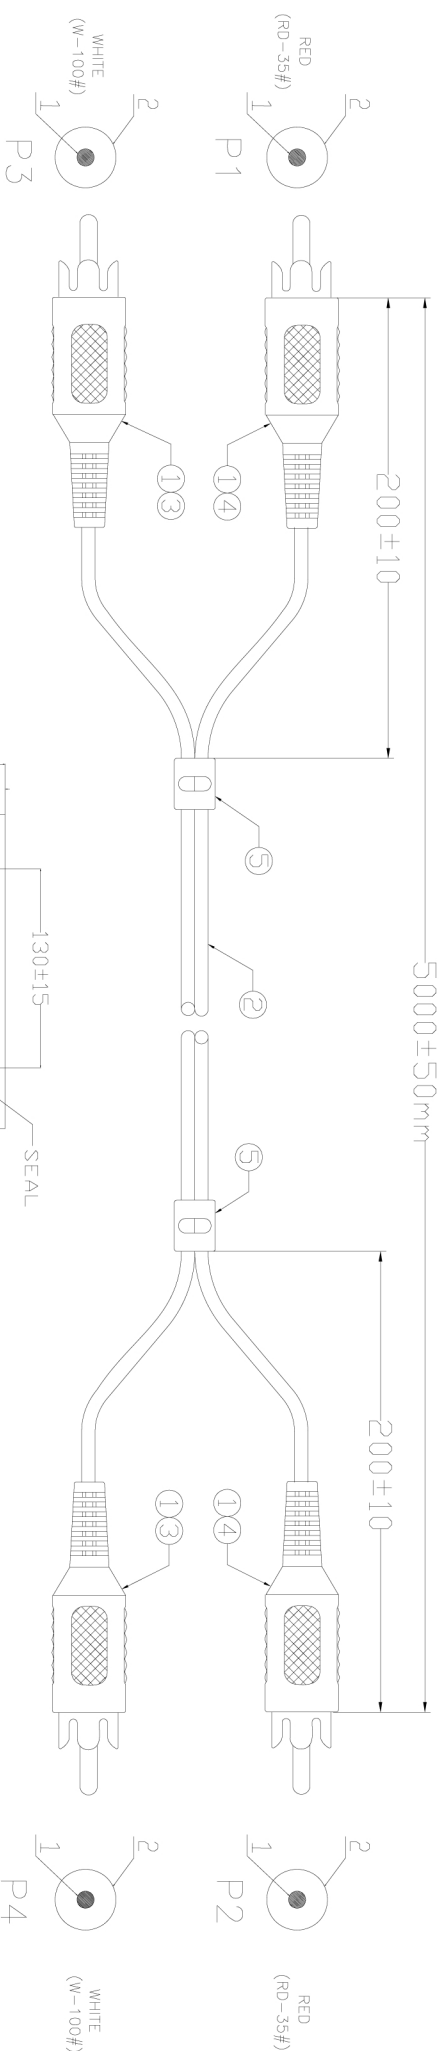

*Electrical test:*

1. 100% short, open, miswire test
2. Conduct resistance: 5 Ohm(max)
3. Insulation resistance: 10Mohm(min)
4. dielectric test: DC 300V

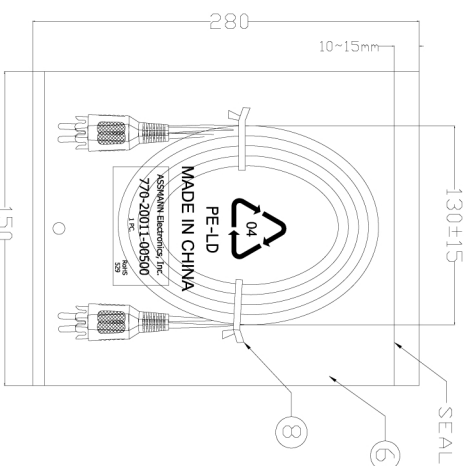

NOTE:  
1. 小PE袋大PE袋对应料号, 包装袋数量及时间印刷样式:



2. 外箱两个侧袋ITEM NO后面各贴一个35\*22mm ROHS标签。

⑧	TIE	2	BLACK L-80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"SPCS"
⑥	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"PC"
⑤	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
③	OUT JACKET	6.6g	PVC-40P RED(RD-35),(Mould NO.:WM-009)
②	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
①	OUT JACKET	6.6g	PVC-40P WHITE(W-100)(Mould NO.:WM-009)
①	CONN	1	NOUL 28#(10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
④	NAME	4	RCA PLUG MALE 梅花型 TYPE NI-PLATED INSULATOR COLOR:BROWN
	NO.		SPECIFICATION

**CnC Tech, LLC**  
Industrial Cable and Connector Technology

DRAWN BY	LICHENG	DRAWING NO.	VG/LJ0-094-082-E
CHECKED BY		CUSTOMER	CnC
APPROVAL BY		ITEM NO.	770-20011-00500
DECIDE BY		DATE	2012-12-28
VERSIONS/EDIT/TON	A/0	PROJECTION	