

MODEL NUMBER
PWD-5520-04-NNN-79


REV.
A

NOTES:

- 1.0 SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: 0.5 to 2.0 GHz
 - 1.2 INSERTION LOSS: 1.0dB MAX. WHEN REFERENCED TO 6dB POWER DIVISION.
 - 1.3 AMPLITUDE UNBALANCE: 0.5dB MAX.
 - 1.4 PHASE BALANCE: 10° MAX.
 - 1.5 VSWR: 1.50:1 MAX.
 - 1.6 ISOLATION: 18dB MIN.
 - 1.7 INPUT POWER: 4.0 WATTS MAX.

- 2.0 FINISH:
- GREY OVER MIL-E-15090 TYPE II, CLASS 2
 - OVER MIL-C-5541 CLASS 3A
 - MEETS MIL-F-14072
 - MEETS MIL-E-5400

- 3.0 MARKING:
MARK UNIT AS SHOWN
(REF.: SLK-08124-82-01)
- 4.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS

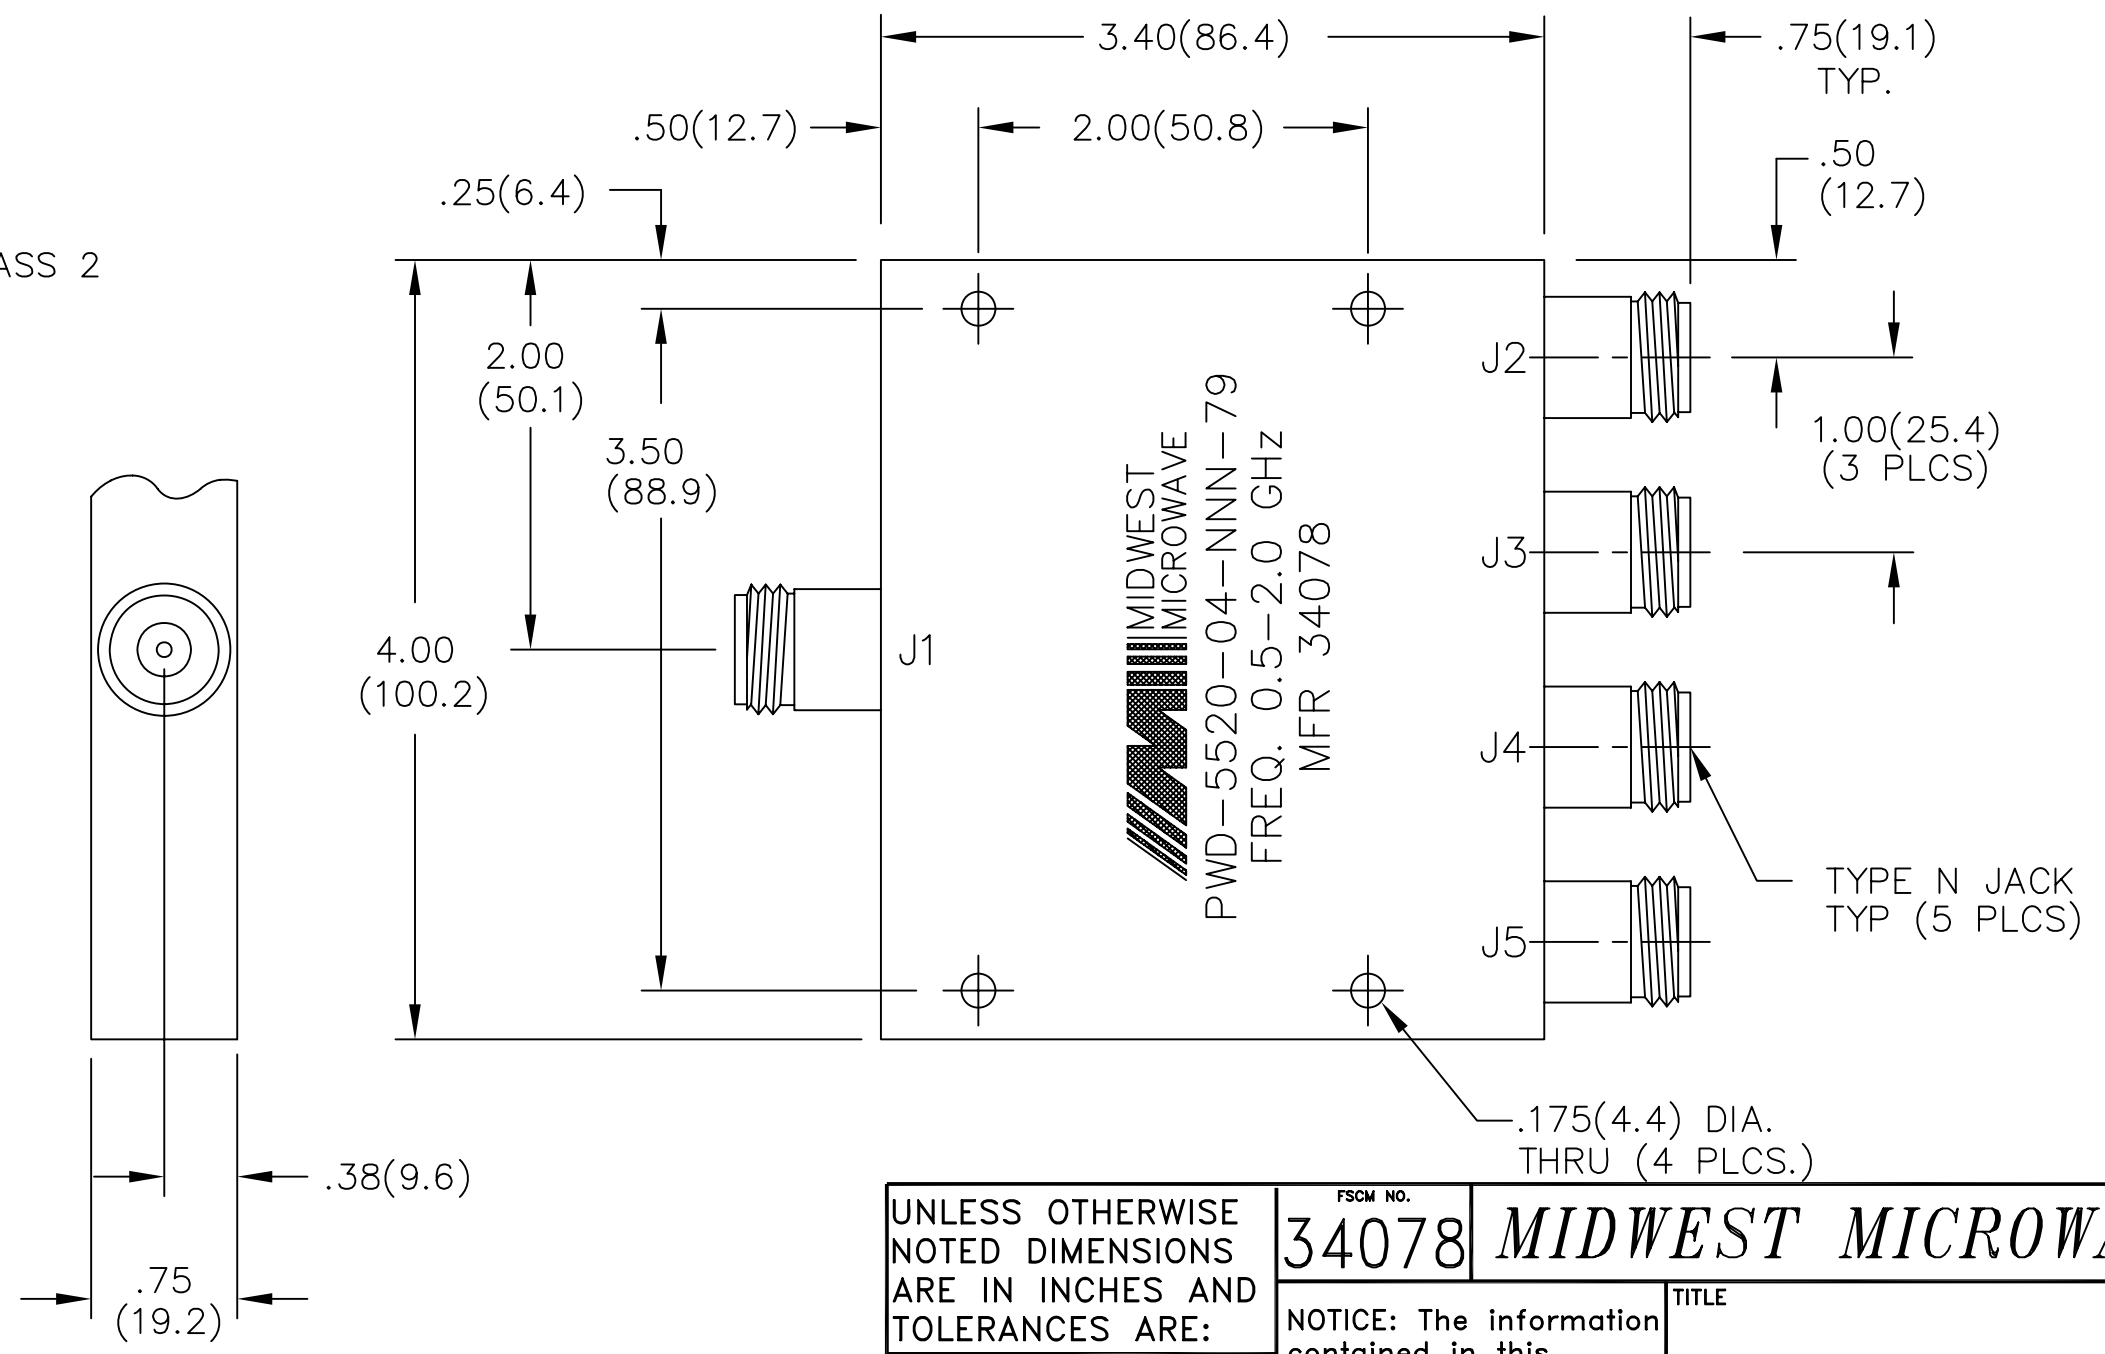

| | | | | | |
|---|--|---|--|--|--|
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: | | FSCM NO. 34078 | | MIDWEST MICROWAVE | |
| 3 PLACE DECIMALS ±.005 | | NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave | | TITLE POWER DIVIDER TYPE N (4-WAY) | |
| 2 PLACE DECIMALS ±.02 | | | | | |
| FRACTIONS ±1/64 | | DRAWN/DATE A.BEATTY 11/7/94 | | ENG./DATE J.O'NEIL 11/7/94 | |
| PARALLELITY: T.I.R. _____ | | CHECKED/DATE | | APPROVED/DATE | |
| FLATNESS: T.I.R. _____ | | DRAWING NUMBER PWD-5520-04-NNN-79 | | SCALE: 1=1 | |
| CONCENTRICITY: T.I.R. _____ | | ANGLES AND PERPENDICULARITY: ±1° | | SHEET 1 of 1 | |

| | | |
|------|-------------|---------|
| REV. | DESCRIPTION | DATE |
| - | RELEASED | 11/8/94 |
| A | ECN 19155 | 4/17/03 |