
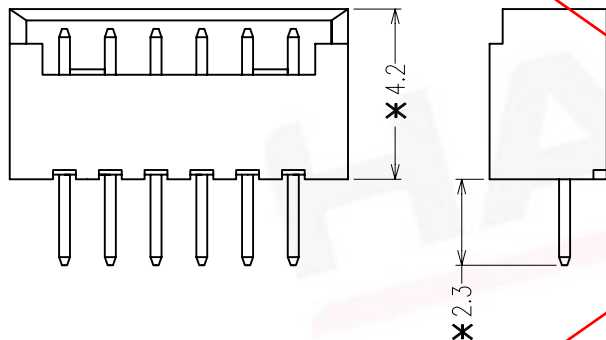
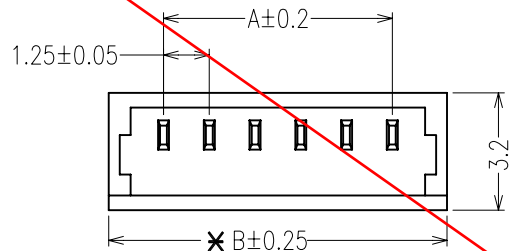


OBSOLETE

PCB LAYOUT

SPECIFICATIONS:

MATERIAL:-

MOULDING: NYLON 66, UL94V-0

CONTACT: PHOSPHOR BRONZE, 0.3MM FLAT PIN

FINISH:-

TIN PLATED

ELECTRICAL:-

CURRENT RATING: 1A AC/DC MAX.

WORKING VOLTAGE: 100V AC/DC

WITHSTAND VOLTAGE: 500V AC/MINUTE

CONTACT RESISTANCE: 20 mΩ MAX.

INSULATION RESISTANCE: 100 MΩ MIN.

ENVIRONMENTAL:-

TEMPERATURE RANGE: -25°C TO +85°C

OTHERS:-

MATE WITH HOUSING M30-130 XX 46

NOTES: ALL DIMENSIONS AND NOTES

MARKED * ARE CRITICAL AND

MUST BE CHECKED IN ACCORDANCE

WITH QUALITY DOC. QI-02A

NO. OF WAYS	PART NO	DIM (MM)	
		A	B
2	M30-3100246	1.25	4.25
3	M30-3100346	2.50	5.50
4	M30-3100446	3.75	6.75
5	M30-3100546	5.00	8.00
6	M30-3100646	6.25	9.25
7	M30-3100746	7.50	10.50
8	M30-3100846	8.75	11.75
9	M30-3100946	10.00	13.00
10	M30-3101046	11.25	14.25
11	M30-3101146	12.50	15.50
12	M30-3101246	13.75	16.75
13	M30-3101346	15.00	18.00
14	M30-3101446	16.25	19.25
15	M30-3101546	17.50	20.50

Allan	2	02.07.08	A139
Allan	1	01.08.06	-
NAME	ISS.	DATE	C/NOTE

APPROVED: *Alan*CHECKED: *Alan*

DRAWN: Allan

CUSTOMER REF.:

ASSEMBLY DRG:

ORDER CODE

M30-310 XX 46

NO. OF WAYS

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.15mm
X.XXX = ±0.08mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
SEE NOTES
FINISH: SEE NOTES
S/AREA: mm²

TITLE: HEADER P=1.25MM DIP STRAIGHT TYPE
DRAWING NUMBER:
M30-310 XX 46

SHT
1
OF
1