
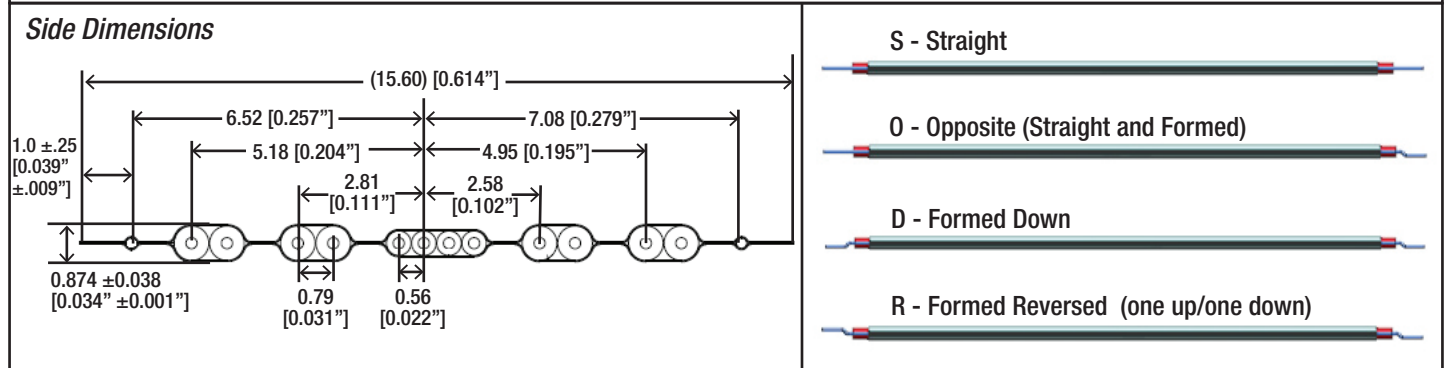


# 3M™ TWIN AXIAL CABLE CUSTOM CUTS

<p><b>SL8801/12-111A5-00</b></p> <p><i>Typical Application</i> SFF 8087 miniSAS with sidebands, other high speed 100 ohm twin axial applications</p> <p><i>Construction</i> DPPBBBBPPD    D = drain wire                           P = pair                           B = sideband insulated conductor</p>	<p><b>PART NUMBERING SYSTEM</b></p> <p>SL8801/12 - 111A5 - <input type="text"/> - <input type="text"/></p> <p>min length 6"</p> <p>S - Straight O - Opposite (Straight and Formed) D - Formed Down R - Formed Reversed (one up/one down)</p>
--	--

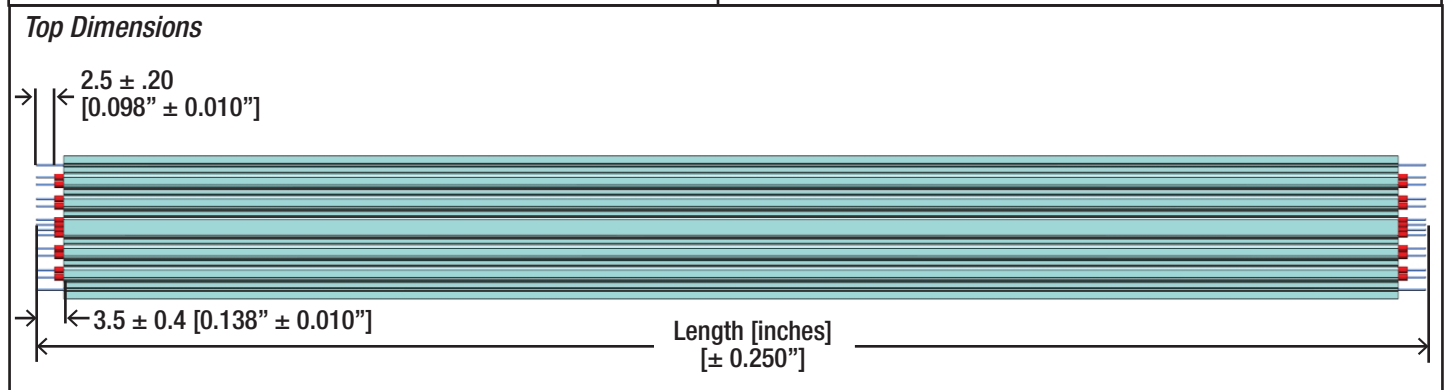

*Length is in inches all other dimensions are in mm [inches]*

*Conductor length is determined before lead forming*

Digi-Key can offer you a quote on your secondary services. For more information on 3M available options or if you need assistance, contact [CustomCut.3MProducts@digikey.com](mailto:CustomCut.3MProducts@digikey.com). Please send dimensional drawings to the aforementioned e-mail address.