


SEE NOTE # 1

A BOTH HANDLE TIPS PAINTED WITH YELLOW LACQUER

5" MAX CLOSED BUT NOT UNDER PRESSURE
10" MAX WHEN OPENED

1. ORDER REPAIR KIT 125218-4.
- 2.- GAGE DIMENSIONS APPLY WHEN TOOL IS BOTTOMED BUT NOT UNDER PRESSURE.
- 3.- FOR REPLACEMENT OF PARTS OTHER THAN SNAP RINGS OR PINS, TOOL SHOULD BE RETURNED TO OUR FACTORY TO INSURE PROPER CERTI-CRIMP ADJUSTMENT.
- 4.- FOR TOOL USAGE, SEE INSTRUCTION SHEET NO. 1809.

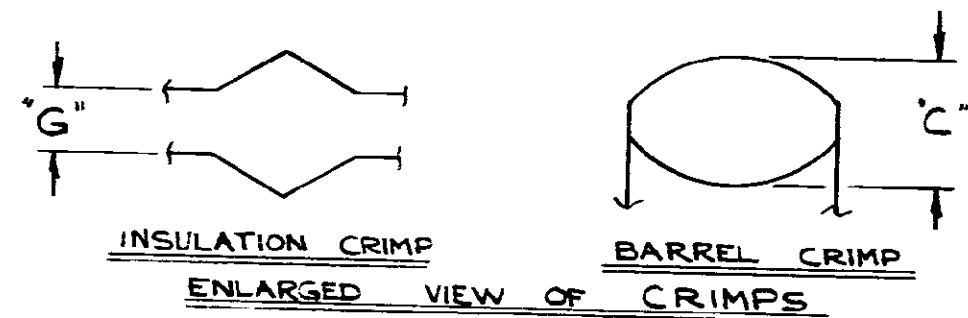

INSULATION CRIMP
BARREL CRIMP
ENLARGED VIEW OF CRIMPS

"G"	
GO	NO GO
.035	.055

"C"	
GO	NO GO
.063 DIA.	.069 DIA.

PINS IN POSITION NO. 1

1	A	39364	SPRING-HANDLE	8
1	A	300449	PIN-RETAINING	7
2	A	300387	RING-RETAINING	6
2	A	300432	PIN-RETAINING	5
4	-	21045-3	RING-RETAINING	4
2	A	39207	PIN-ADJUSTMENT	3
1	B	125083-2	LOCATOR	2
1	A	3-21016-7	SCREW (#8-32 X 3/8 LGTH.)	1

REVISION RECORD LTR A-2 LOC. M WAS A A-1 ADDED OVERALL DIMS A ADDED 39364, NOTE 3-21016-7 WAS 39227 & RELOCATED LOC. ITEM # 2 DR 10/19/61 11/2/61 4/1/65 7/68				REQUIRED PER ASSEMBLY 90026				DWG NUMBER 90026		NAME DOUBLE ACTION HAND TOOL		REMARKS 90026		ITEM NO 1	
©1961 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.															
DR J. Shug 10/19/61 CHK W. J. ... 11/2/61 DE APP C. ... 11/2/61				MATERIAL AND FINISH MATERIAL - STEEL FINISH - BLACK OXIDE WEIGHT - 1 LBS, 3 OZ. WIRE - RANGE - INSULATION TOLERANCE EXCEPT AS NOTED SCALE LOC M NO B NAME				CUSTOMER COPY REFERENCE ONLY AMP INCORPORATED HARRISBURG, PENNA. LONG HANDLES TYPE "C" PRE-INSULATED DIAMOND GRIP NO 90026 REV A-2							

CUSTOMER DRAWING

DIMENSIONS IN INCHES DO NOT SCALE PRINT