

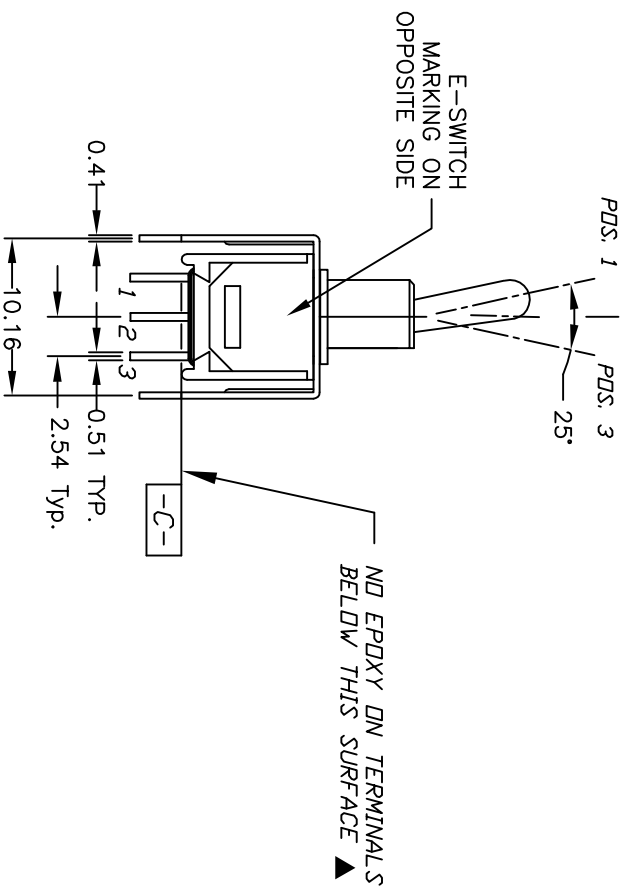


RECOMMENDED P.C.B. LAYOUT

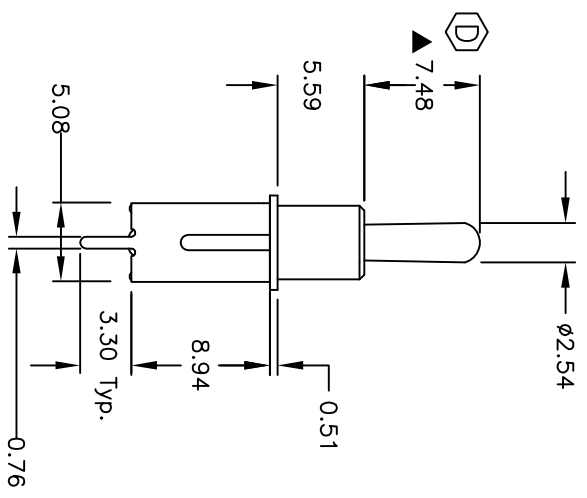

CIRCUIT: SPDT CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	NONE	DN	
2-3	OPEN	2-1	

- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. CONTACT RATING: 0.4 (VA) max. @20 VAC or DC max.
  5. CONTACT MATERIAL: GOLD
  6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
  7. INSULATION RESISTANCE: 1,000 M ohm min.
  8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
  9. OPERATING TEMP.: -30°C to 85°C
  10. 2002/95/EC (ROHS) COMPLIANT
  11. ▲ DENOTES CRITICAL PARAMETER.

D	18582	ACTUATOR LENGTH CORRECTED	7/8/09	BLR
C	16700	FIXED ACUATOR UPDATE NOTES	11/27/06	TN
B	11538	REVISED ACTUATOR	6/11/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE		E-SWITCH <sup>®</sup>		LAMB INDUSTRIES	
200MSP1TSB2VS2RE		SCALE	2:1	DATE	11/27/2006
		DR	BLR	DWG	T211060
		REV	D		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED