


Passive module - UMK-RJ45/S/8PTDA - 2900682

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




VARIOFACE module for connecting a RJ45 socket with spring-cage double connection terminal blocks in direct plug-in method.

Why buy this product

- ✓ Connector housing led to separate connection terminal blocks
- ✓ RJ45 connector, 8-pos.
- ✓ Screw or spring-cage connection (direct plug-in technology)
- ✓ 1:1 connection



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 524353
GTIN	4046356524353

Technical data

Dimensions

Width	25 mm
Height	91 mm
Depth	51 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	48 V AC/DC
Max. perm. current (per branch)	1 A
Max. permissible current (separate power supply)	4 A
Number of positions	8

Passive module - UMK-RJ45/S/8PTDA - 2900682

Technical data

General

Mounting position	any
-------------------	-----

Connection data for connection 1

Connection name	Field level
Connection method	Spring-cage connection
Stripping length	8 mm
Conductor cross section solid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16
Number of positions	10

Connection data for connection 2

Connection name	Controller level
Connection method	RJ45 socket
Number of connections	1
Number of positions	8

Standards and Regulations


Standards/regulations	DIN EN 50178
Rated surge voltage	0.5 kV
Degree of pollution	2
Overvoltage category	II

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Circuit diagram

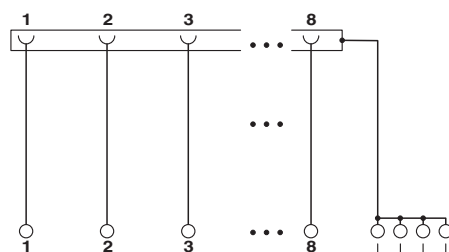

Approvals

Approvals

Passive module - UMK-RJ45/S/8PTDA - 2900682


Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.A*30.B.01742
-----	---	--------------------------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>