

VSC8572

Dual Port Dual Media RGMII/SGMII GbE PHY with IEEE 1588

Microsemi's new GbE PHY simplifies Synchronous Ethernet and IEEE 1588 timing in Carrier Ethernet designs.

VSC8572 is the next-generation Carrier Ethernet Gigabit PHY transceiver designed to simplify the support of fully traceable timing across Gigabit Ethernet backhaul devices, cellular base stations, and other timing-critical platforms. VSC8572 supports two dual media copper/fiber ports with RGMII and SGMII MAC interfaces. Recovered clock outputs and an integrated IEEE 1588 timing packet engine enable the VSC8572 device to meet the demands of applications requiring highly precise timing, without adding unnecessary complexity or increased cost to the design.

To meet Carrier demands for redundancy, the VSC8572 device has dual recovered clock outputs for primary and secondary timing references for Synchronous Ethernet solutions. Programmable clock squelch control is included for inhibiting undesirable clocks from propagating and preventing timing loops.

In addition to identifying PTP Y.1731 in Ethernet and IPv4/6 over Ethernet per IEEE 1588, VSC8572 supports various encapsulation links including IP over MPLS, Ethernet pseudowire over MPLS/MPLSTP, QinQ, and MAC-in-MAC. VSC8572 supports ring resiliency, a feature that enables PHY ports to switch between master and slave timing without interrupting the 1000BASE-T link. VSC8572 has integrated temperature monitoring and is ideal for high-temperature applications.


Microsemi's innovative EcoEthernet 2.0 technology supports Energy Efficient Ethernet (EEE) through ActiPHY™ automatic link powerdown and the PerfectReach™ intelligent algorithm that adjusts power based on cable length. VSC8572 further supports reduced power consumption in all link operating speeds.

Highlights

- Single and two-step IEEE 1588v2 time stamping over encapsulated links including MPLS and PBB
- MPLS and Ethernet Y.1731 OAM support
- EcoEthernet™ 2.0 green technology for energy efficiency

Applications

- Wireless backhaul systems
- Carrier Ethernet cellular base stations
- Industrial automation systems

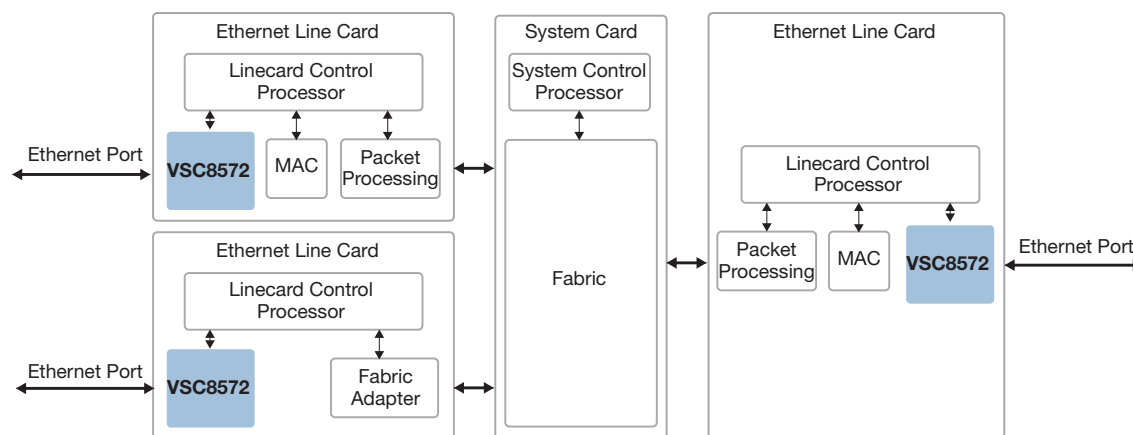

VSC8572

Dual Port Dual Media RGMII/SGMII GbE PHY with IEEE 1588

Best-in-Class Power Consumption

- Lowest power dual port GbE PHY in the industry
- EcoEthernet 2.0 green energy efficiency modes including ActiPHY, PerfectReach, and IEEE 802.3az
- Integrated temperature monitoring and LED brightness control
- Fully optimized power consumption for all link speeds

Superior PHY and Interface Technology

- Two integrated 10/100/1000BASE-T Ethernet copper transceivers (IEEE 802.3ab compliant) with VeriPHY™ cable diagnostics
- Two dual media copper/fiber ports with unidirectional IEEE 802.3ah support
- RGMII and SGMII SerDes MAC interfaces
- Patented line driver with low EMI voltage mode and integrated line side termination resistors
- HP Auto-MDIX support
- Integrated AC-coupling capacitors for SGMII interface
- Jumbo frame support up to 16 kB with programmable synchronization FIFOs

Advanced Carrier Ethernet Support

- Recovered clock outputs with programmable clock squelch control and fast link failure indication (<1 ms) for G.8261 SyncE applications
- Supports IEEE 1588v2 timestamp packet correction
- Flexible transmit and receive frequency timing per PHY port
- 1000BASE-T ring resiliency for switching between master/slave timing while maintaining link up integrity
- Integrated dual I2C mux to control SFP and PoE modules
- Supports IEEE 802.3bf timing and synchronization

Key Specifications

- 1.0 V core and 2.5 V I/O power supplies
- 3.3 V-tolerant 2.5 V inputs
- 17 mm × 17 mm ball grid array package
- Supports RGMII v1.3/2.0, SGMII v1.9, IEEE 1149.1 JTAG boundary scan, and IEEE 1149.6 AC-JTAG
- Compliant with IEEE 802.3 (10/1000 BASE-T, 100BASE-TX, 100BASE-FX, and 1000BASE-X)

Related Products

Visit www.microsemi.com for information about these related products:

- 1 GbE Carrier Ethernet switches, PHYs, and MACs
- 10/40/100G PHY solutions
- Electronic dispersion compensation CDRs and backplane signal conditioners



Microsemi

Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996
email: sales.support@microsemi.com
www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense and security, aerospace, and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs, and ASICs; power management products; timing and synchronization devices and precise time solutions; voice processing devices; RF solutions; discrete components; enterprise storage and communications solutions, security technologies, and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees worldwide. Learn more at www.microsemi.com.