


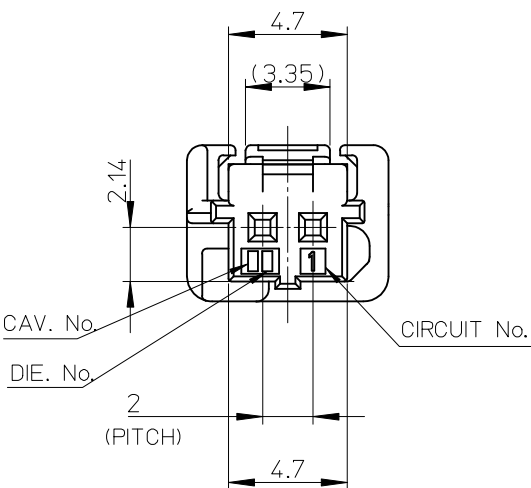

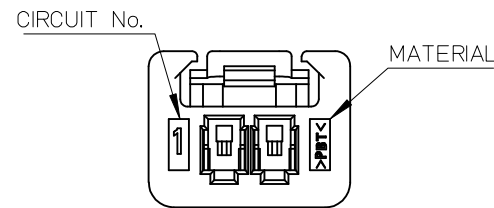


GENERAL TOLERANCE										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 OVR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±0.5°	0.1	



SERIES No.
FACTORY CODE



NOTES:

1. MATERIALS: POLYESTER (PBT), GLASS FILLED, UL94V-0
2. MATES WITH: 502352, 560020 SERIES
3. APPLICABLE TERMINAL : 560124-0101, 560124-0131
4. APPLICABLE ISL : 560125-0200
5. GENERAL TOLERANCES : SEE TABLE
6. EVL AND RoHS COMPLIANT
7. PRODUCT SPECIFICATION: PS-560123-001
8. PACKING SPECIFICATION: PK-560123-001

ORDER NO.	MATERIAL NO.	COLOR
560123-0200	5601230200	WHITE
560123-0201	5601230201	BLACK
560123-0202	5601230202	RED
560123-0204	5601230204	BLUE

ADDED OPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		mm	INCH	MM ONLY		METRIC		
EC NO: KTR2016-0056	▽=0	4 PLACES	± ---	± ---	DRAWN BY	DATE	TITLE	NEW 2.0 PITCH W/B CONN. REC. 2WAY HSG DURA CLIK™ ISL SERIES
DRWNS:JLEE06	◻=0	3 PLACES	± ---	± ---	YIBA EK	2014/07/03		
CHKD:BCY00N		2 PLACES	± ---	± ---	CHECKED BY	DATE		MOLEX INCORPORATED
APPR:JYCH01		1 PLACE	± ---	± ---	BCY00N	2014/07/03		
		ANGULAR ± ---°			APPROVED BY	DATE		SD-560123-001
					SRTAK	2014/08/26		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		MATERIAL NO.	DOCUMENT NO.	SHEET NO.
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		1 OF 1