

A

B

C

D

E

F

G

H

A

B

C




D

E


F

G

H

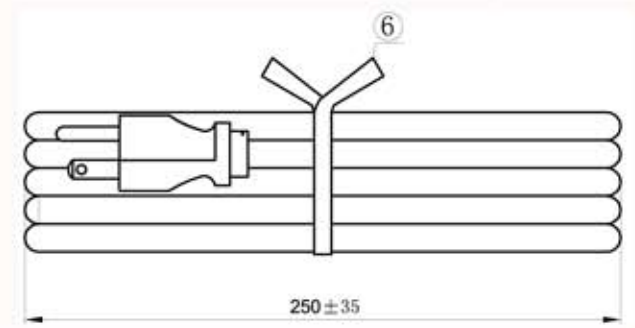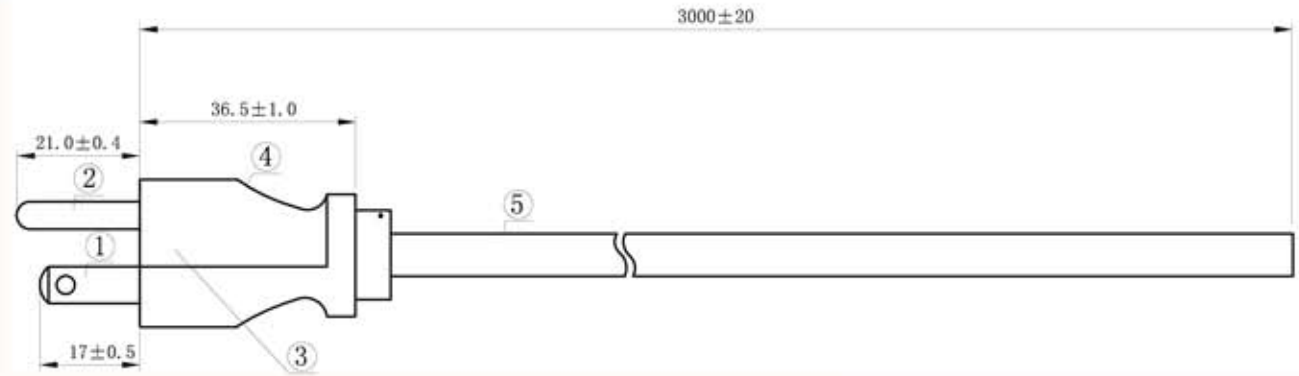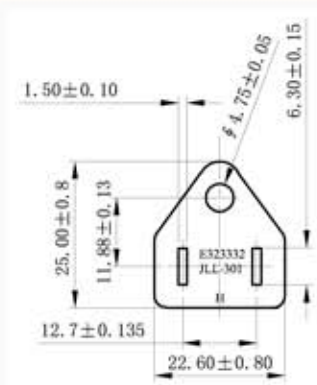

E243929 (UL) SJT 3×16AWG(1.31mm²) YW-1 SHIELDED 105°C 300V CSA 228191 S
 JT 3×16AWG(1.31mm²) FT2 SHIELDED 105°C 300V -LF-

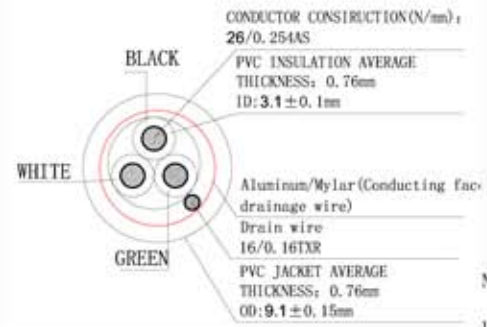

- NOTES:
- 1) JACKET COLOR: BLACK
 - 2) E-GREEN; L-BLACK ; N-WHITE
- TESTING:
- 1) 100% OPEN & SHORT TESTING
 - 2) INSULATION RESISTANCE: 100M ohm(min)
 - 3) VOLTAGE: DC500V/1min
 - 4) ROHS COMPLIANT

NO.	SPECIFICATION	COLOUR	MATERIAL	AMOUNT
①	Load terminals 98661	Silver	Cu	2P
②	Grounding terminal 97475	Silver	Cu	1P
③	Model aircraft 8661AN-3P	WHITE	PBT	1PCS
④	Plug JLL-301	BLACK	PVC Cu	1PCS
⑤	Wire SJT 16AWG/3C 105°	BLACK	PVC Cu	1PCS
⑥	Ties	BLACK		1PCS

Scale	1:1						Name	Item No.
TOLERANCE							Miller	A-PC2314-030030-2
X.X	±0.40				Drawn	3/26/12		
X.XX	±0.25				Approved	3/26/12	Warner	Title 5-15P to Open, 3M, SJT#16*3C 105C SHIELDED
X.XXX	±0.15							Drawing No.
Angle	±3°							rev00
								Replace
								Sheet
		Modification	Date	Name				

