


PCB layout, component side

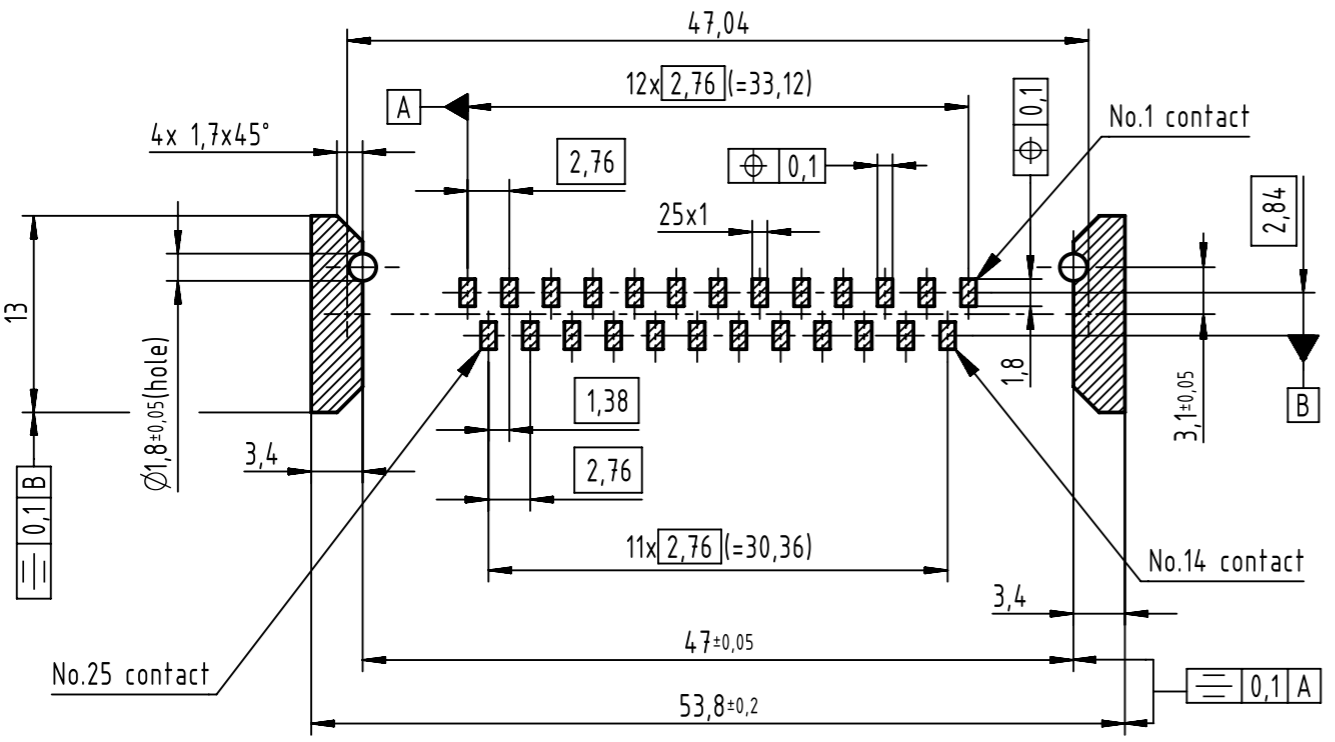

Max. Temperature: 260° during 10 seconds.
Find further technical information on DS 09550200302

0955 315 3611 741	1	M3	Black insulator	Reel Packaging 140 connectors
0955 315 3612 741	1	4-40 UNC		
0955 315 6611 741	2	M3		
0955 315 6612 741	2	4-40 UNC		
0955 315 7611 741	3	M3		
0955 315 7612 741	3	4-40 UNC		
Part number	PL	Nut	Index designation	

	All Dimensions in mm Original Size DIN A3		Scale 2:1	Free size tol.	Ref. Sub.	
	All rights reserved Department EC PD - CN		Created by ZHUANGJ	Inspected by LUOK	Standardisation HOFFMANN	Date 2015-03-03
HARTING Electronics GmbH D-32339 Espelkamp		Title D-Sub str SMT 25-pole fem ass with nut and ground pad			State Final Release	Doc-Key / ECM-Nr. 100236623/UGD/001/B 50000084919
		Type TB	Number 0955315X61X		Rev. B	Page 1/1