

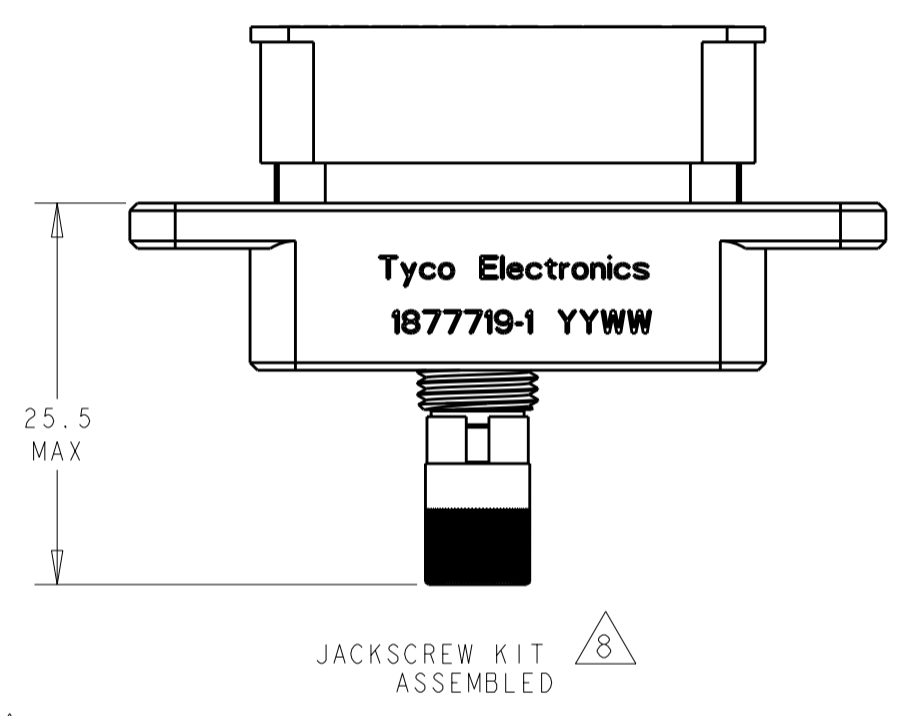
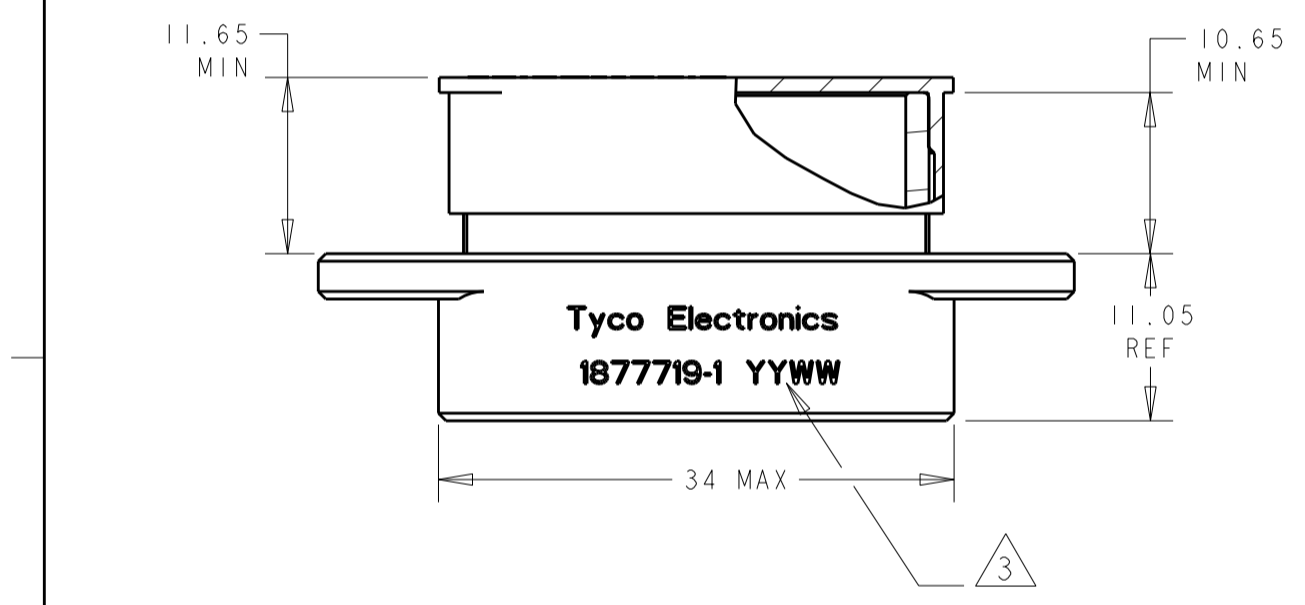
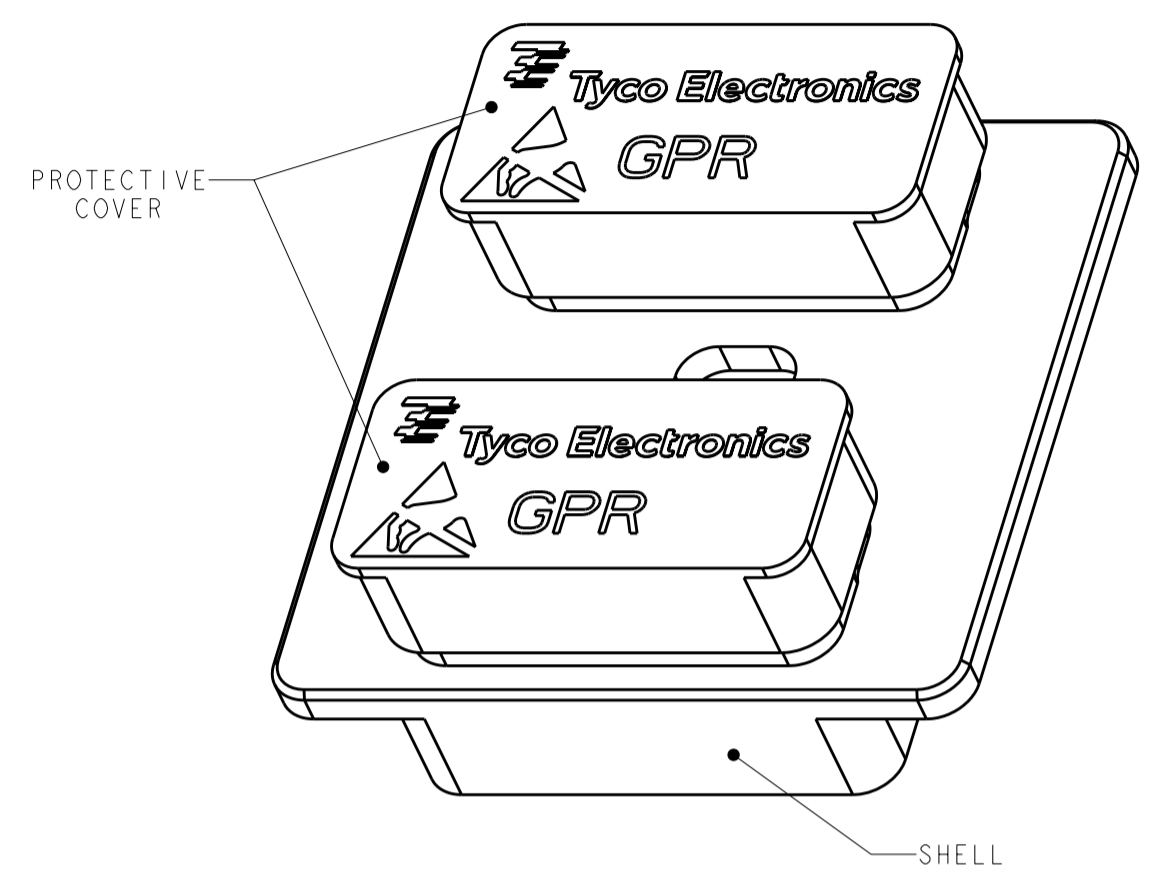
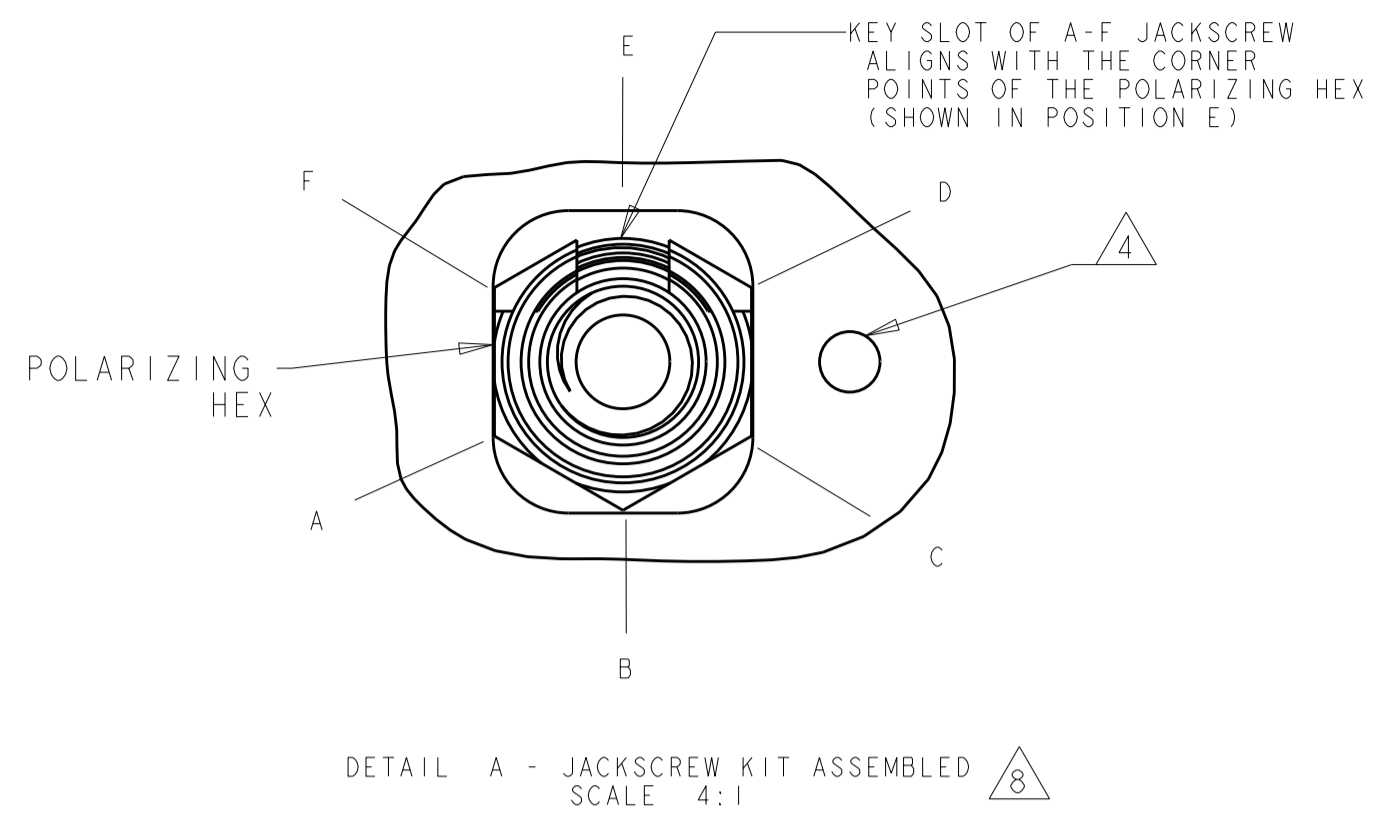
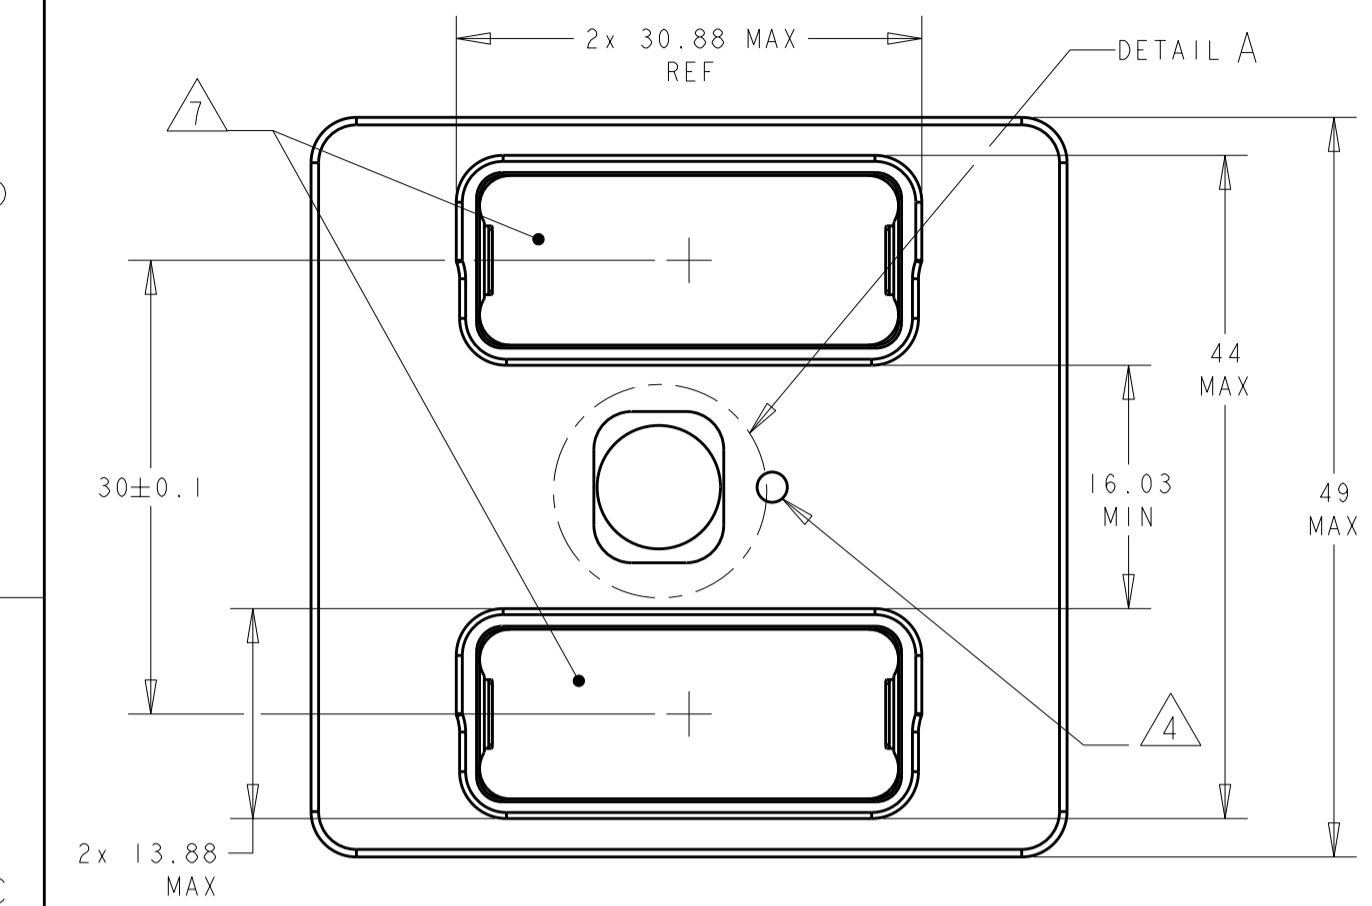


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
DF	A5				
A		REV PER ECO-06-020475	05SEP2006	RCF	JPM
B		REVISED PER ECO-10-009274	20APR2010	RF	JM

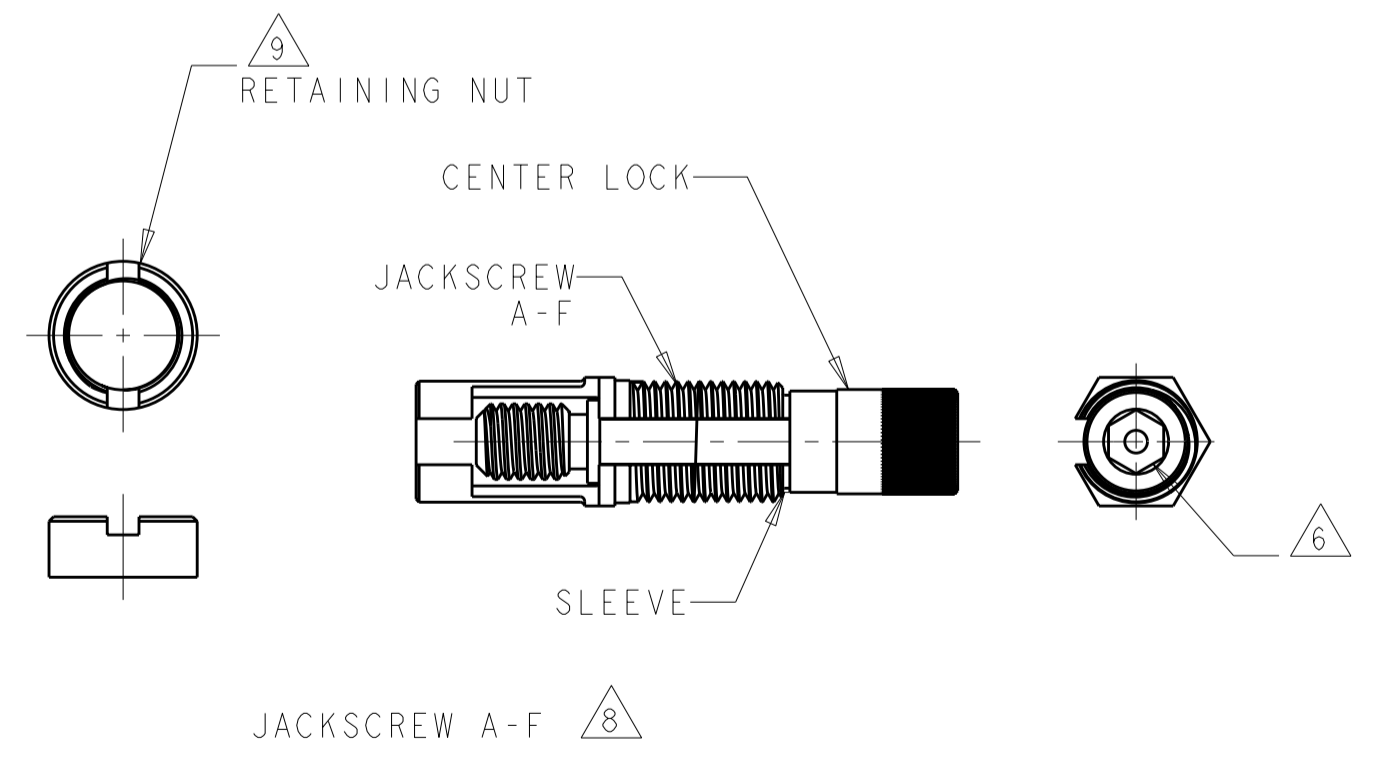

- 1. SHELL: ALUMINUM ALLOY 6061 T651
 INSERT RETENTION CLIP & JACKSCREW SLEEVE: COPPER ALLOY PER ASTM B194
 JACKSCREW KEY, CENTER LOCK, & RETAINING NUT: STAINLESS STEEL PER AISI 316
 PROTECTIVE COVER: ANTI-STATIC THERMOPLASTIC ELASTOMER PER ASTM D5593,
 COLOR: BLACK
- 2. SHELL: ELECTROLESS NICKEL PER SAE AMS-C-26074, CLASS 1
- 3. DATE CODE - YEAR & WEEK (YY WW)
- 4. INDEXING POINT FOR POLARIZATION
- 5. SHELL CAVITIES FOR GPRB SERIES INSERTS WITH KEYING CODE A
- 6. HEX KEY SLOT FOR 9/64 ALLEN WRENCH
- 7. THE PROTECTIVE COVERS ARE NOT SHOWN FOR CLARITY.
- 8. THE JACKNUT AND RETAINING NUT ARE SHIPPED UNASSEMBLED. THE CUSTOMER SHALL APPLY LOCTITE® PRODUCT 272 THREAD LOCKING ADHESIVE WHEN INSTALLING THESE ON THE SHELL ASSEMBLY. LOCTITE® IS A REGISTERED TRADEMARK OF HENKEL CORPORATION.
- 9. A SPANNER WRENCH TOOL, TYCO ELECTRONICS P/N 1738220-1 (WITH 1/4-IN ADAPTER) OR 1738221-1 (WITH T-HANDLE), IS USED TO LOCK THE RETAINING NUT. RECOMMENDED TORQUE: 1.5 N·m (13 in-lb).
- 10. THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER LICENSE FROM RADIAL SA.

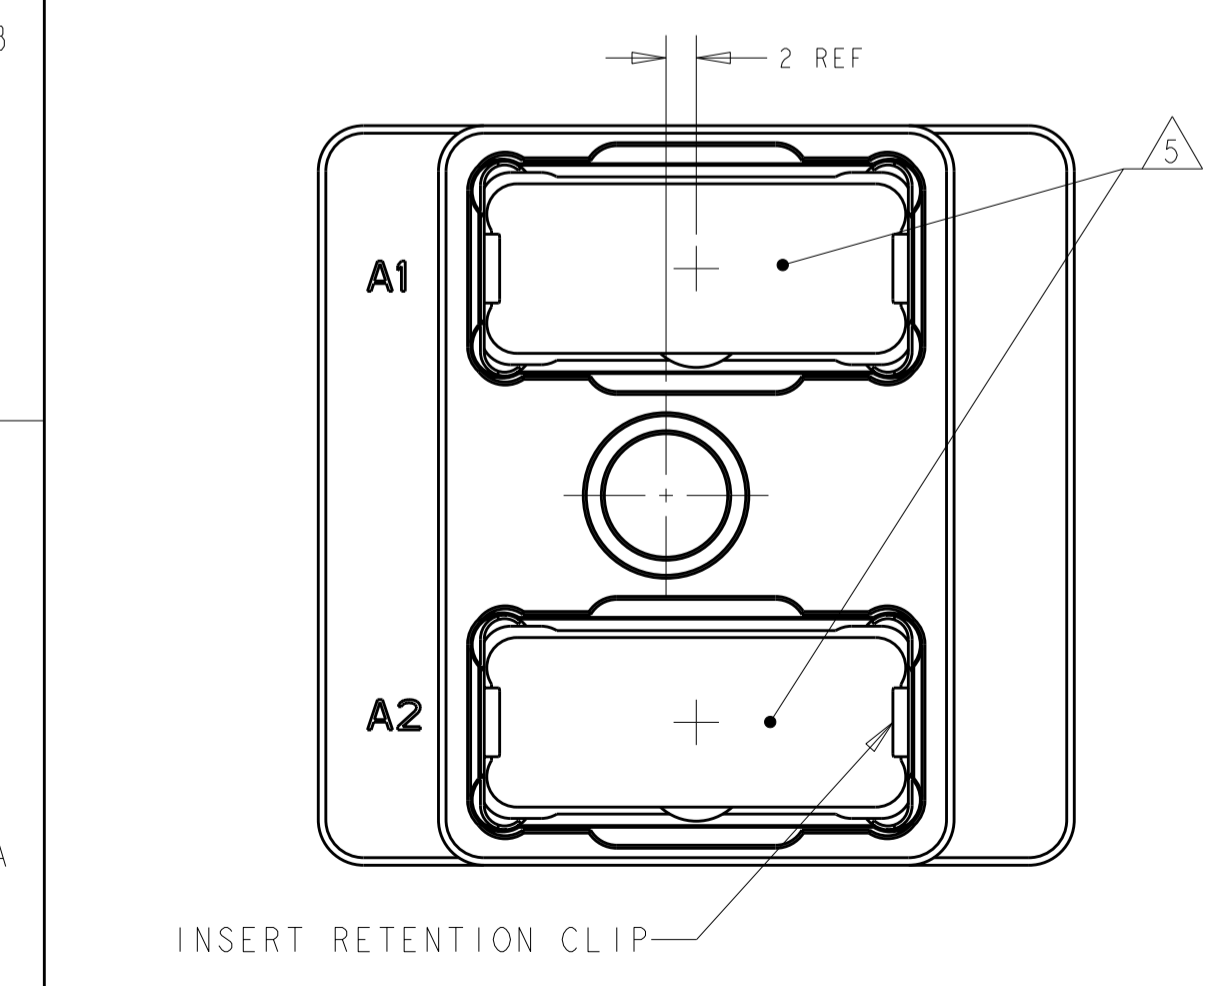

1877719-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN	BW	31JAN06	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS:		CHK	JPM	31JAN06		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	JPM	31JAN06		
0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		PRODUCT SPEC	-			
MATERIAL	1	APPLICATION SPEC	-		NAME	PLUG SHELL KIT, VERTICAL, WITH A-F JACKSCREW, GPRB2
CUSTOMER DRAWING		WEIGHT	-		SIZE	A2
SCALE 2:1		SHEET 1 OF 1		DRAWING NO		C-1877719
RESTRICTED TO		REV B				