
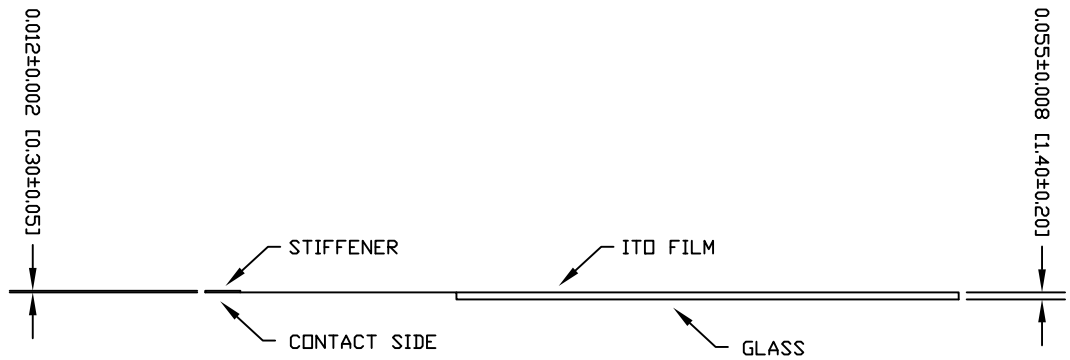


PIN DIAGRAM

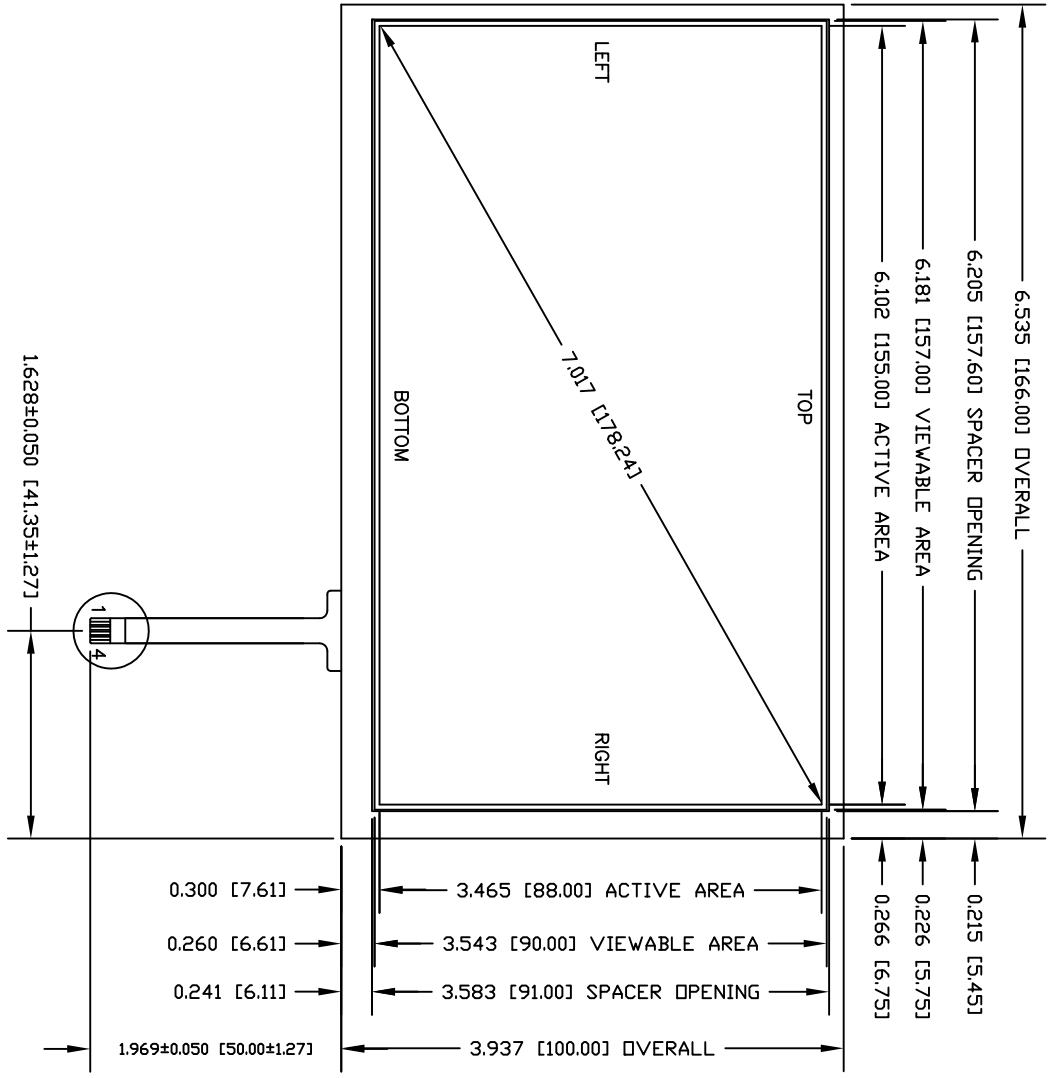

- NOTES:
1. TOLERANCE ± 0.020 UNLESS NOTED OTHERWISE.
 2. TOP CONDUCTIVE LAYER TO HAVE AN ANTI-GLARE HARDCOATED SURFACE.
 3. PIN ONE IS DESIGNATED BY THE NUMERICAL NUMBER 1 BY THE CONNECTOR END.
 4. PINDOUT TO BE AS INDICATED.

- PIN 1 - LEFT.
 - PIN 2 - BOTTOM.
 - PIN 3 - RIGHT.
 - PIN 4 - TOP.
5. TAIL TYPE: IMMERSION GOLD PLATED PFC, ZIF

BERGQUIST TOUGH PRODUCTS			
301 WASHINGTON STREET			
CANNON FALLS, MN 55605			
TITLE: 7.00 DIAGONAL 4-WIRE			
DRN: MLR	DATE: 5/16/08	TOL: ±0.020	DWG #: 9519B
CHKD:	DATE:		REV
APVD:	DATE:	PART #: 400434	REV