



REV	DATE	REVISIONS	DATE	BY
GP 00	1/7/82	REVISION	1/7/82	BMI/WJM
H		REVISED PER ECO-88-00737		

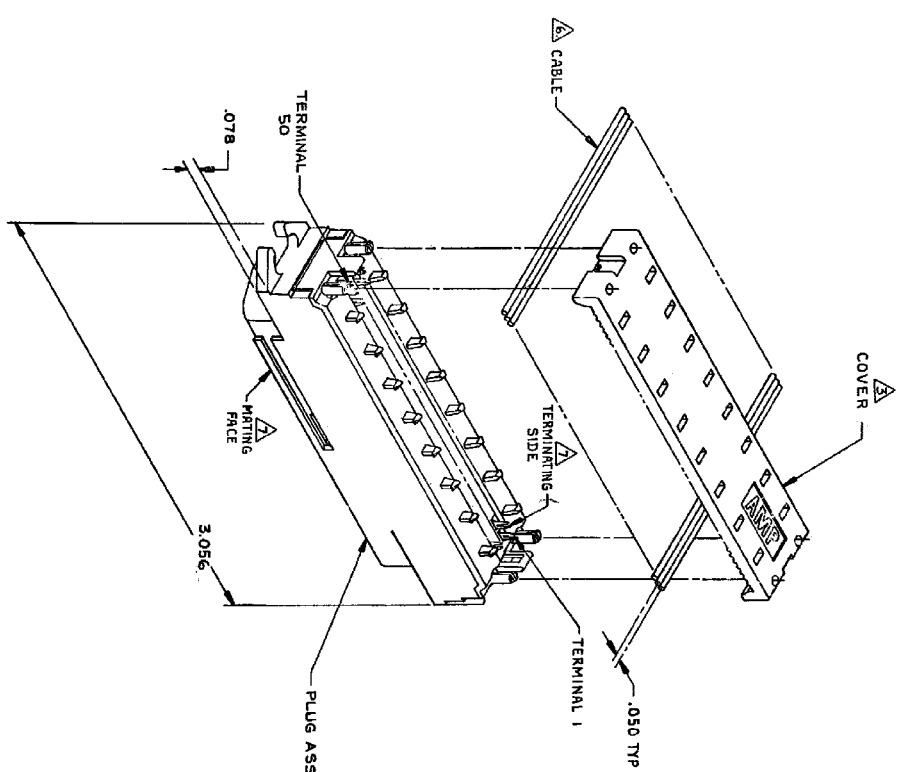

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
2. MATERIAL: HOUSING & COVER - THERMOPLASTIC, BLACK. TERMINALS - PHOS BRONZE PLATED WITH EITHER .000050 MINIMUM GOLD PLATE OR GOLD FLASH OVER PALLADIUM NICKEL PLATE. .000050 MIN TOTAL ON MATING SURFACE. GOLD FLASH PLATED ON TERMINATING SIDE. .000050 MINIMUM NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
3. COVER SHOWN LOOSE BUT SHIPPED ASSEMBLED.
4. WIRE RANGE: 26 AWG SOLID THRU 30 AWG SOLID AND 28 AWG STRANDED RIBBON CABLE.
5. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
6. FLAT CABLE SHALL BE FURNISHED BY CUSTOMER.
7. MATING FACE CONSISTS OF TWO ROWS OF TERMINALS ON .085 CENTERS. TERMINATING SIDE CONSISTS OF TERMINALS ON .100 CENTERS FOR AN EFFECTIVE .050 TERMINATION.
8. FOR MORE INFORMATION REFER TO AMP PRODUCT SPECIFICATION 108-6076 & APPLICATION SPEC 114-6030.

DIMENSIONS		TOLERANCES		FINISHES	
INCHES	MILLIMETERS	FRACTIONS	DECIMALS	ANNEAL	PLATING
±.005	±.125	±.005	±.005	AS SUPPLIED	AS SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.	DATE: 19/06/07	BY: Z. BEZAL
APPROVED BY: W. MILLIKENS	DATE: 19/06/07	BY: W. MILLIKENS
PRODUCT SPEC: PLUG ASSEMBLY, 50 POSITION	DATE: 19/06/07	BY: W. MILLIKENS
APPLICATION SPEC: BULK ORDER, LOW PROFILE, BULK ORDER, LATCH	DATE: 19/06/07	BY: W. MILLIKENS
REVISION: A2	DATE: 08/07/07	BY: W. MILLIKENS
CUSTOMER DRAWING: A2100779	DATE: 08/07/07	BY: W. MILLIKENS
SCALE: 2:1	SHEET: 1	REV: H