


LOC	DIST	REVISIONS					
A1	-	P	LTR	DESCRIPTION	DATE	DWN	APVD

CRIMP HEAD FOR MQS TERMINALS 0,5-0,75 mm<sup>2</sup>  
Crimpkopf fuer MQS-Kontakte 0,5-0,75 mm<sup>2</sup>

Kontaktlocator unter TE P/N 9-1579005-1  
als Ersatzteil erhaeltlich  
Terminal locator TE P/N 9-1579005-1  
as spare part available

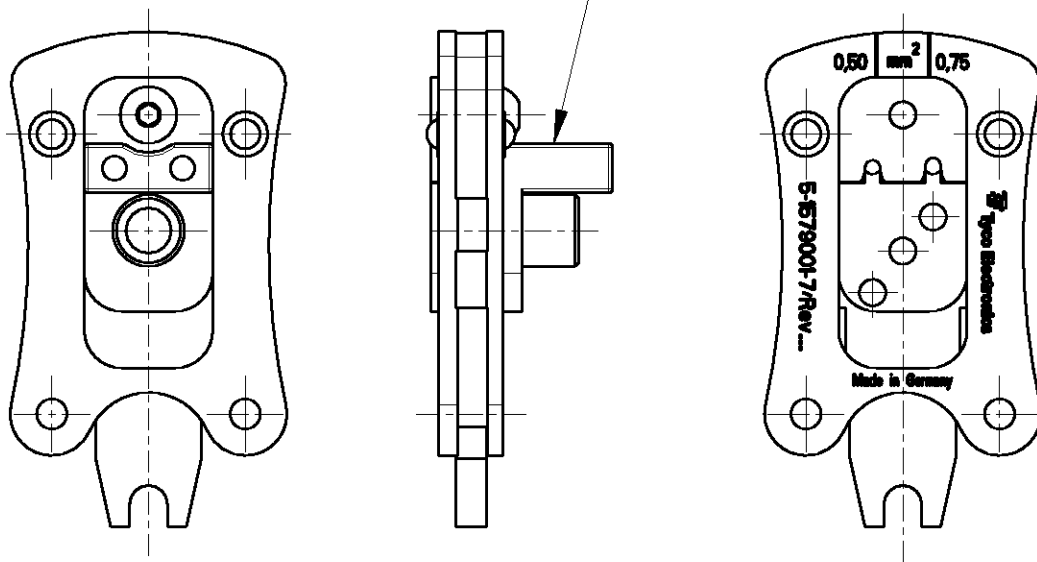

Kontakt	DGB mm <sup>2</sup>	Drahtcrimp/Wire Crimp		Isolationscrimp/Insulation Crimp		Isol. Ø	Betriebsanl.
Contact	Wire Range	Hoehe/Height mm	Breite/Width mm	Hoehe/Height mm	Breite/Width mm	Ins.Range	Instr. Sheet
963729/963730 968221/1241921 1452014	0,50	0,93 ±0,03	1,40 F	1,70 ±0,1	2,03 0	1,4-1,6	411-18296
	0,75	1,07 ±0,03		2,05 ±0,1		1,7-1,9	

Crimp head used in combination with short handles CSV10 Vario, TE P/N 2-1579005-1  
Crimpkopf in Kombination mit Griff CSV10 Vario kurz, TE P/N 2-1579005-1 verwenden

Processing of terminals according to application specification 114-18021-1  
Verarbeitung der Kontakte nach Verarbeitungsspezifikation 114-18021-1

2008

RELEASED FOR PUBLICATION

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2008

DIMENSIONS:		DWN	08FEB2008	MATERIAL	-	FINISH	-
mm		Ch.Witt	-	Tyco Electronics 64625 Bensheim (Germany)			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	-				
0 PLC ±		APVD	-	NAME CRIMP HEAD CSV 10 FOR MQS 0,5-0,75 mm <sup>2</sup>			
1 PLC ±		PRODUCT SPEC	-				
2 PLC ±		APPLICATION SPEC	-	SIZE	A 4	CAGE CODE	00779
3 PLC ±		WEIGHT	95 g	DRAWING NO	C=5-1579001-7		RESTRICTED TO
4 PLC ±		CUSTOMER DRAWING		SCALE	1:1	SHEET	1 OF 1
ANGLES ±°						REV	A