

Description

- 2 x 6mm watch crystal with pre-formed legs to make a SMD package.
- Model CFPX-56
- Model Issue number 6

Frequency Parameters

- Frequency 32.7680kHz
- Frequency Tolerance ± 20.00 ppm
- Tolerance Condition @ 25°C
- Overtone Order Fundamental
- Ageing ± 5 ppm max in 1st year

Electrical Parameters

- Load Capacitance (CL) 12.50pF
- Shunt Capacitance (C0) 1.6pF typical
- Drive Level 1.0μW max
- ESR 40.00kΩ max
- Motional Capacitance (C1) 3.2fF typ
- Frequency Stability Coefficient: -0.034 ppm/°C² ± 0.006 ppm/°C²

Environmental Parameters

- High Temperature Storage: 85°C for 24hrs
- Drop: 75cm drop (3 times) onto hard wooden board
- Storage Temperature Range: -40 to 85°C

Manufacturing Details

- Suitable for reflow soldering at 245°C max for 10sec max x 1 cycle
- Note: Do not solder the body of the device to any PCB pads. Use other bonding methods such as adhesive, sealant, sticky-pads.

Compliance



- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 3,000
- Alternative packing option available



Outline (mm)

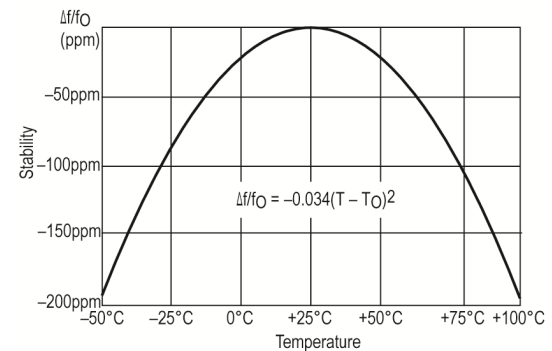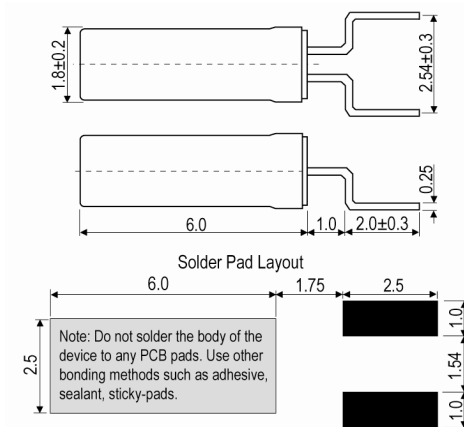


Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443


France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Typical Frequency Stability Characteristics

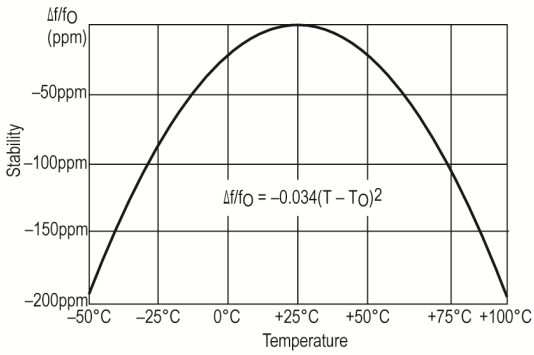

Reflow Temperature Profile

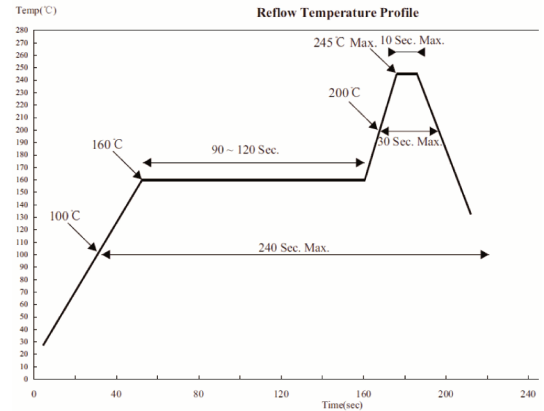

Sales Office Contact Details:

UK: +44 (0)1460 270200
 Germany: 0800 1808 443

France: 0800 901 383
 USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com